




INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)


PARTS LIST	PART NO .	DESCRIPTION
------------	-----------	-------------

FINISH PLATES


INSTALLED ON INDIVIDUALS / SHIPPED SEPARATELY ON ROWS




100614 S1 Square




102519 Razor



100620 R1 Round




102521 Aero



102522 Flair

PARTS LIST	PART NO .	DESCRIPTION
------------	-----------	-------------

CORNER BOX & SNAP ON COVER: SHIPPED SEPARATELY



89646 90° Corner Assembly

LENSES

INSTALLED ON INDIVIDUALS / SHIPPED SEPARATELY ON ROWS



S1

RAZOR


R1

AERO


FLAIR




JOINERS:




102523 S1 Square




102524 Razor



102525 R1 Round



102526 Aero



102527 Flair



—

#6 X 3/8" PH Torx Tamper-Resistant Screw (Optional)

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.




INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)

EBCP ELECTRICAL BOX COVER (OPTIONAL)

7/8" Dia. K.O. will accommodate 2"x 4" or 4"x 4" J-Box (by others)

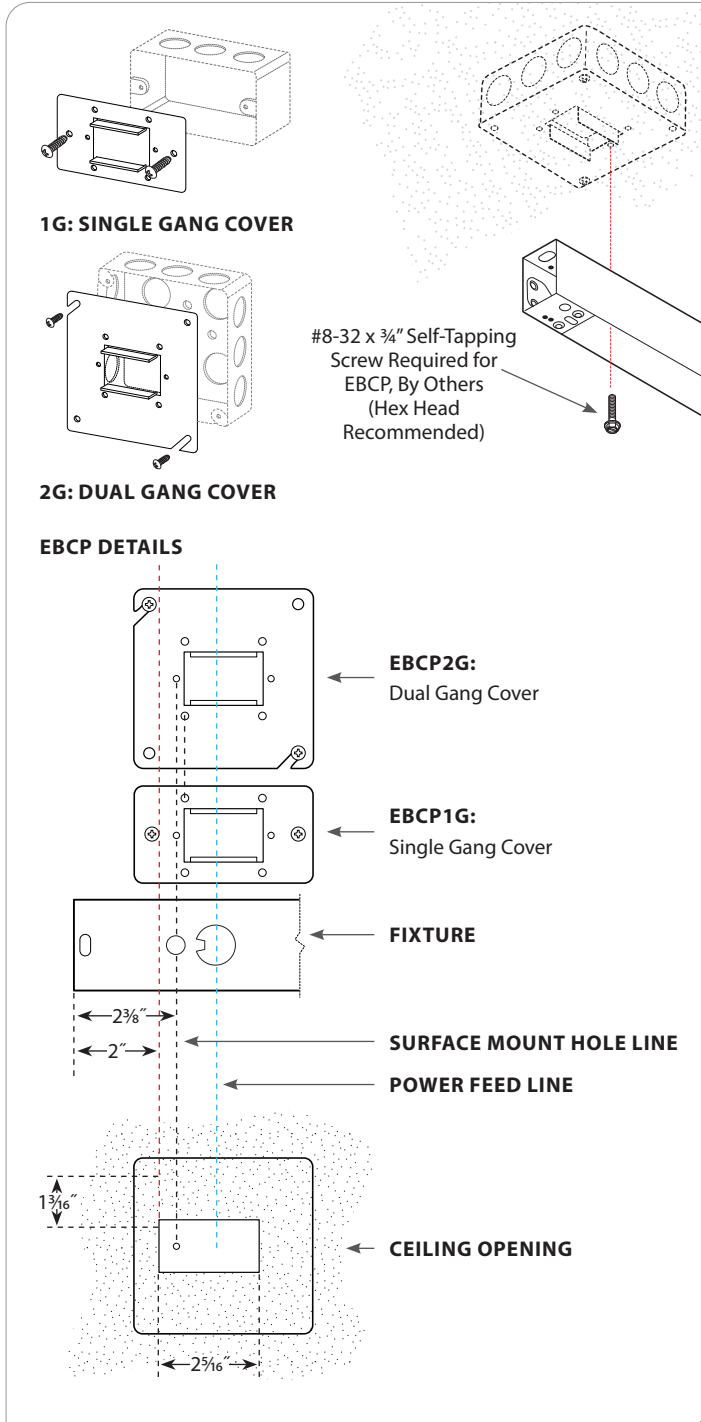

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.




INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)


GENERAL INSTALLATION

- See row diagram or prudential Lighting plan layout (if provided). Begin all row mounting from left to right (see arrows).
- Depending upon ceiling construction structural support may be required at mounting hole locations.

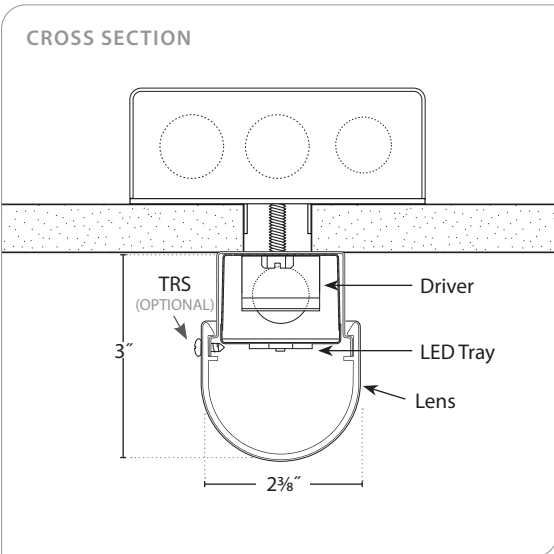

MOUNTING LOCATIONS


INDIVIDUAL: ROW DIRECTION: INSTALL FROM LEFT TO RIGHT

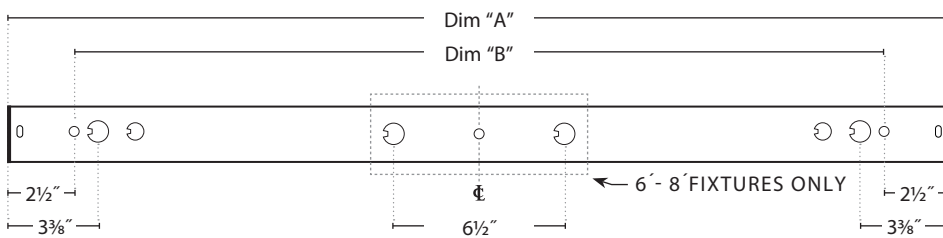

SURFACE MOUNT DIMENSIONS

FIXTURE	Dim "A"	Dim "B"
2'	24 1/4"	19 1/4"
3'	36 1/4"	32 1/4"
4'	48 1/4"	43 1/4"
5'	60 1/4"	55 1/4"
6'	72 3/16"	67 7/16"
7'	84 3/16"	79 7/16"
8'	96 3/16"	95 7/16"

ROW:

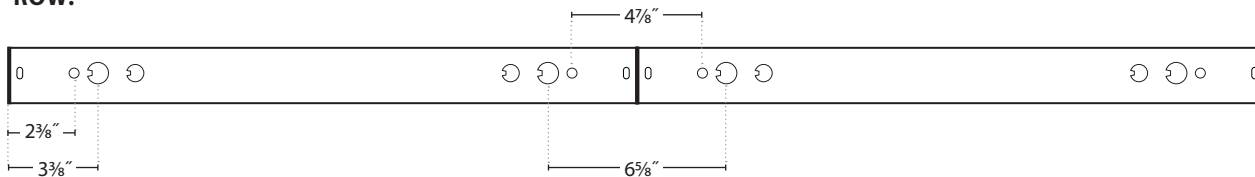

= 3/8" Wiring K.O. = 1/4" Mounting Hole

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.




INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)

INDIVIDUAL

1. Remove Lens from fixture.
2. Unscrew LED tray from body and remove the LED tray by unplugging the LED lead wire disconnects on first fixture, remove LED Tray (figure 2).
3. Mount fixture to ceiling surface through ¼" diameter holes (mounting hardware provided by others) & make all electrical connections from ceiling to fixture (figure 4, page 5). For fixtures with internal EM drivers, **DO NOT** plug the connectors until after normal power has been applied to the fixture.
4. Re-install reflectors. Ensure no wires are pinched between trays and housing to avoid electrical and alignment issues.

FIGURE 2

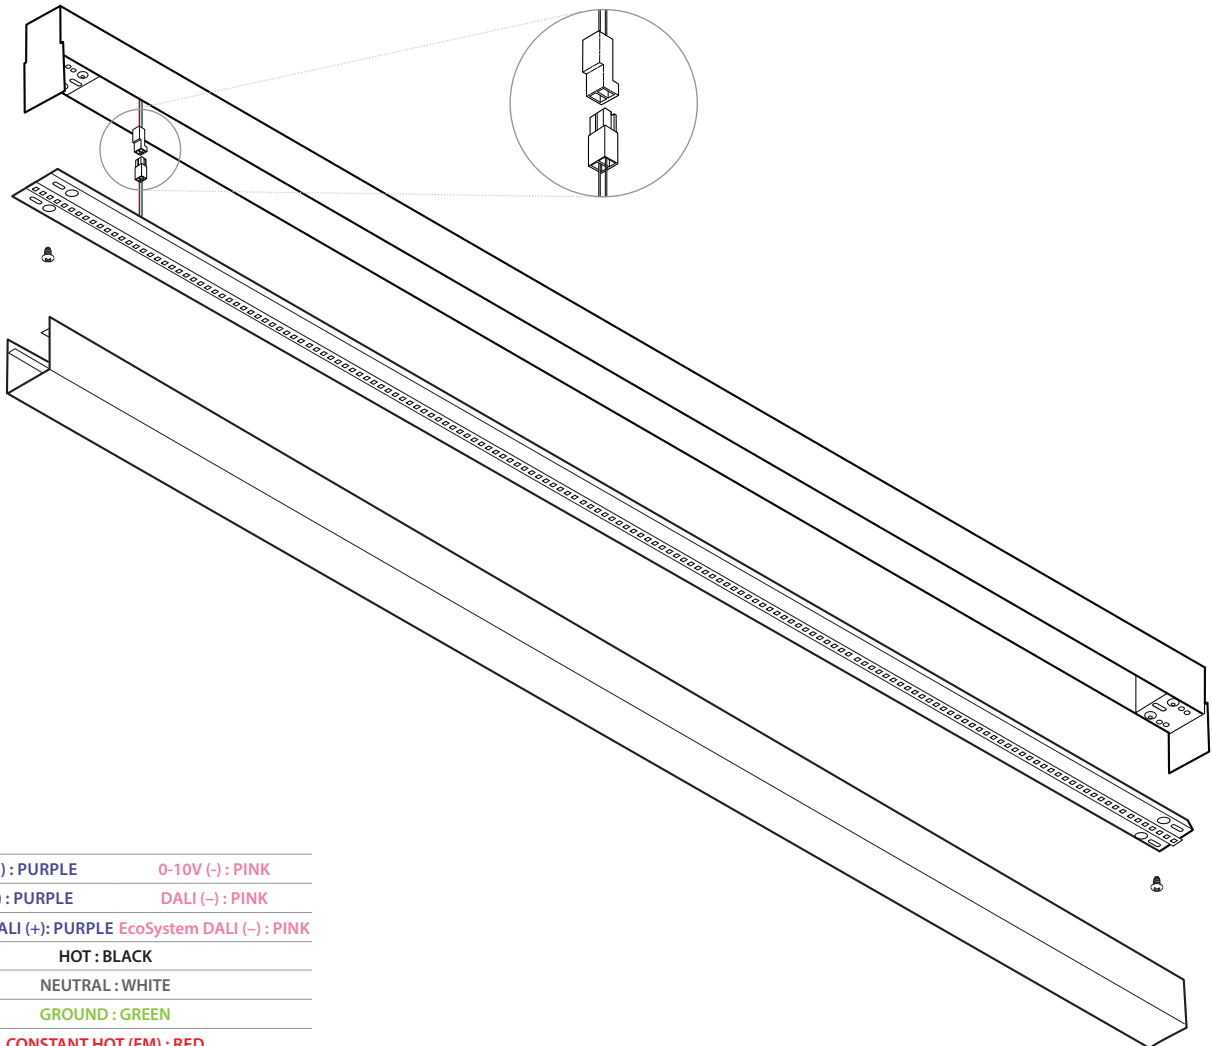

WIRING:

0-10V (+) : PURPLE	0-10V (-) : PINK
DALI (+) : PURPLE	DALI (-) : PINK
EcoSystem DALI (+) : PURPLE	EcoSystem DALI (-) : PINK
HOT : BLACK	
NEUTRAL : WHITE	
GROUND : GREEN	
CONSTANT HOT (EM) : RED	

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.



INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)

CONTINUOUS ROWS

REFER TO PAGE 3 FOR OPTIONAL T-BAR MOUNTING RAIL ASSEMBLY

1. Unscrew LED tray from body and remove the LED tray by unplugging the LED lead wire disconnects on first fixture, remove LED Tray (figure 1, page 4).
2. Cut lead end of the wire harness and strip wires. Make electrical connections (figure 3).
3. Remove reflector on all subsequent fixtures (intermediates and ends).
 - Install joiner on all intermediate fixtures.
 - Install finish plate on right end of end fixtures, push till it snaps in.
4. Join fixture by sliding left hand end onto joiner of previously installed fixture and secure to structure with screws (by others). Continue this until all fixtures in the row are installed.
5. Plug circuit assembly together for wiring rest of row. If fixture has internal EM driver, **DO NOT** plug the EM driver connectors until power has been applied to the row.
6. Re-install reflectors. Ensure no wires are pinched between trays and housing to avoid electrical and alignment issues.


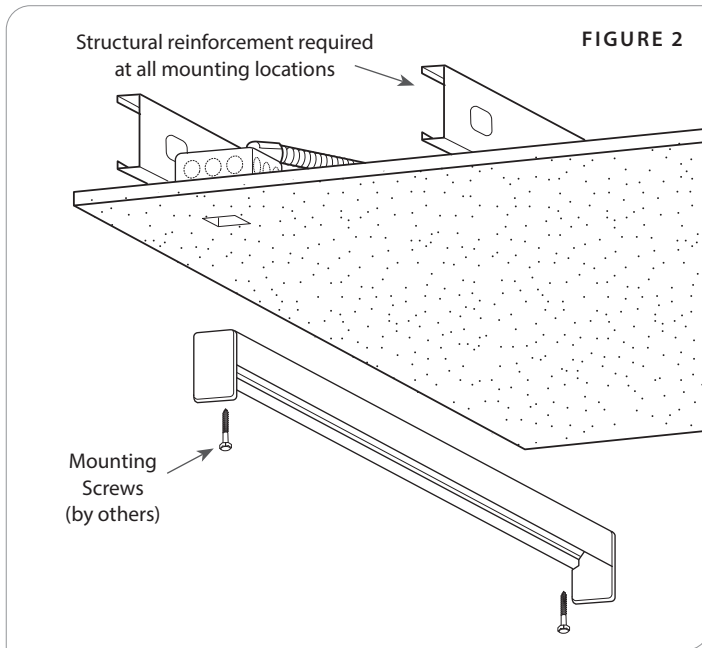


FIGURE 2








WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.

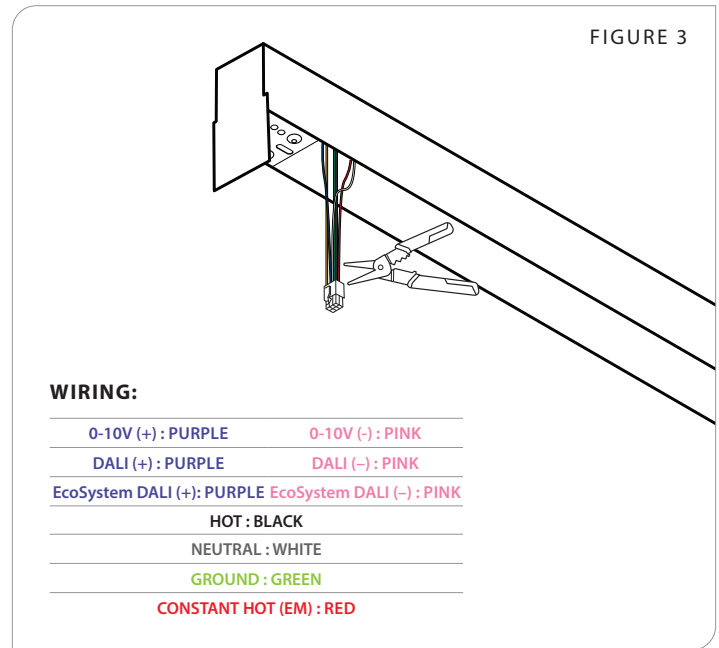

INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)

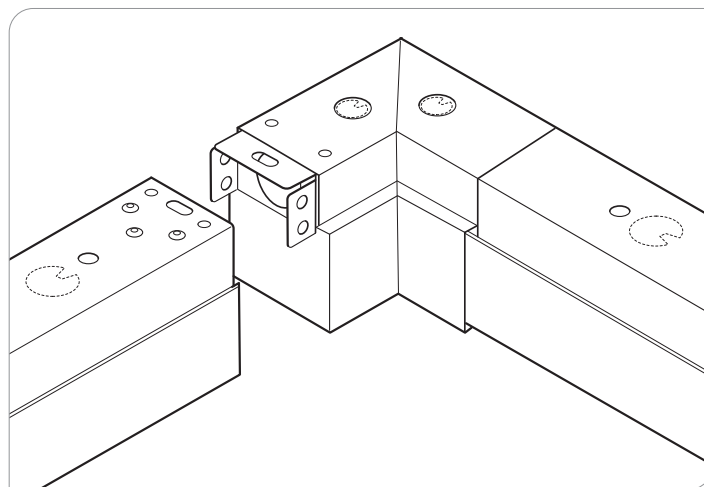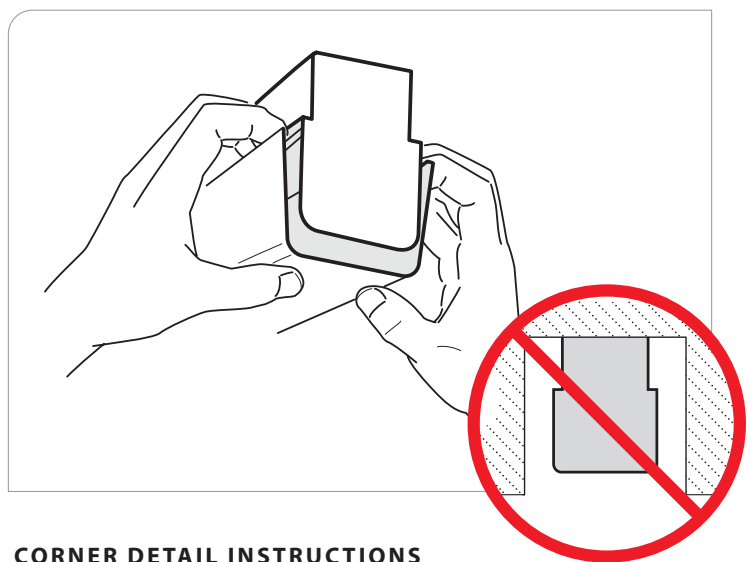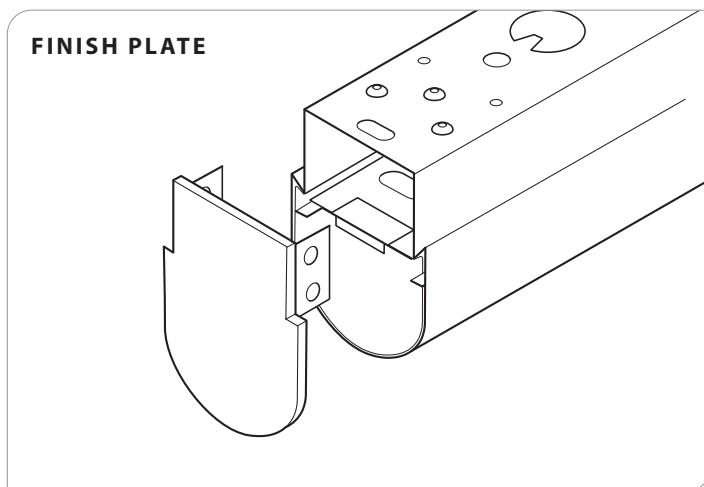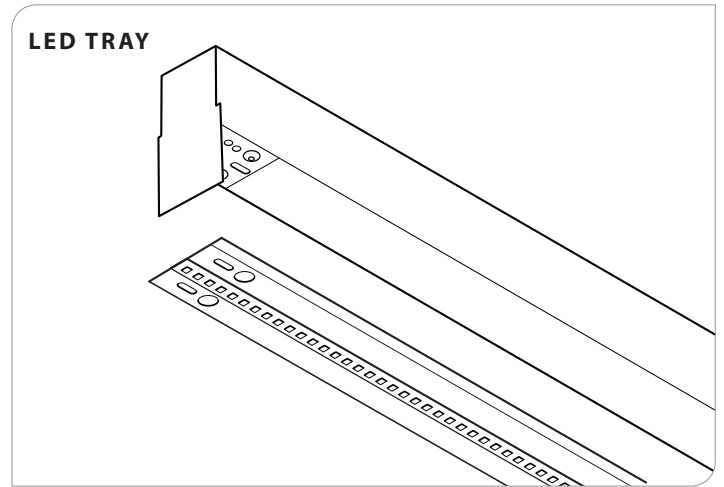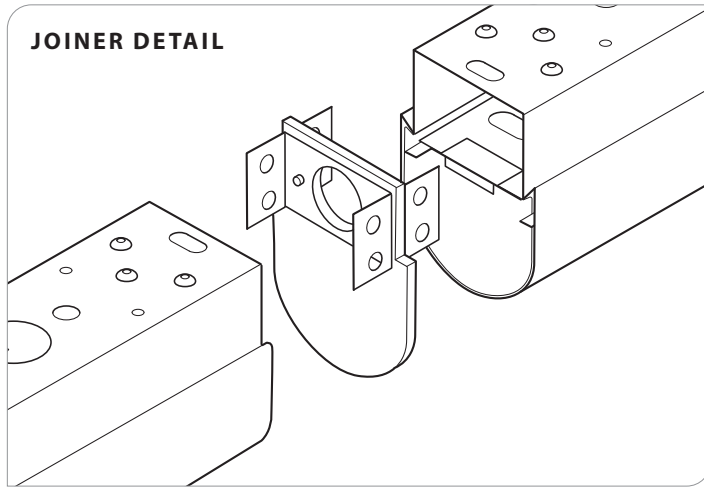

CORNER DETAIL INSTRUCTIONS

1. Run circuit assembly quick connect from adjoining fixture into one end of corner box and out the other end.
2. Snap both legs of corner box into adjoining fixtures.
3. Snap-on bottom corner box cover.

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.