

ECOdrive, a programmable digital LED driver, provides standard LED fixtures with the smoothest flicker-free dimming to 1%. It has a single configurable constant current LED output, making it simple to design in. Symbiosis ensures the LED driver works seamlessly together with LED modules, controls and intelligent luminaire elements.

Features

- Natural dimming to 1% (Hybrid HydraDrive)
- Symbiosis: add value with sensing, connecting, protecting, tooling, communicating, sharing and lighting dynamics features
- Programmable to fit application

Electrical specifications

Driver type	constant current
LED outputs	1 (UL Class 2)
LED output power	50W max
Programmable LED output current range	150-1,400mA
LED output current resolution	programmable in 1mA steps
LED output voltage range	1.5-55V
AUX output	15.5-25V, 18mA max
Standby power	<0.5W
Input voltage AC	120-277V (UL)
Input voltage DC	120-250V
Input current	0.7A max
Inrush current	negligible: 70mA ² s @ 277V
Surge protection	2kV DM, 2 kV CM
Efficiency @ full load	86%
Efficiency @ 2/3 load	≥85%
Power factor @ full load	>0.9
THD @ full load	<20%
Control protocol	DALI-2, LEDcode2
Control channels	1
Ta operating range	-20 °C ... +50 °C / -4 °F ... +122 °F
Tc max	80 °C / 176 °F
Tc lifetime	75 °C / 167 °F
Lifetime @ Tc lifetime	50,000 hours
Warranty	3 years



ECOdrive AC, 50W, DALI + aux, constant current, 1x55V output, side feed, metal long

- LEDcode2: connects to integrated digital accessories, supports location-based IoT applications and enables wired and wireless lighting control through LEDcode peripheral devices
- Low inrush and THD, high power factor and efficiency

Certifications & standards



EN 61347-1/-2-13, EN 62384, EN 55015, EN 55022, EN 61000-3-2, EN 61547, IEC 62386-101 Edition 2.0, IEC 62386-102 Edition 2.0, IEC 62386-207 Edition 1

UL 1310, UL 8750 (Class 2 output). Type TL LED driver

RoHS2


Dimensions, weight, packaging

LxWxH	320x30x26mm / 12.6x1.2x1in
Weight	225 g, 7.94 oz
Drivers per carton	50 pcs

Wiring



Order number configuration

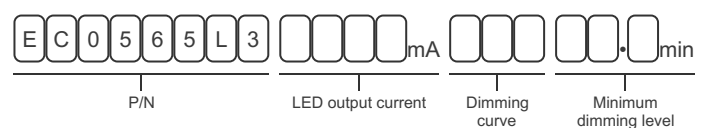

LED output current: in 1mA steps

Dimming curve: enter "LOG" for a logarithmic, or "LIN" for a linear dimming curve.

Minimum dimming level: write to one decimal place, e.g. "05.0" for 5%, "07.5" for 7.5%, "10.1" for 10.1%, etc. Leave blank if default minimum dimming level (1%) is required.

Project name:	Contact details:
Project number:	
LED driver order number:	

Europe, Rest of World
eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands
sales@eldoled.com

North America
eldoLED America
One Lithonia Way
Conyers, GA 30012
USA
nasales@eldoled.com