





TOOLS REQUIRED



Power Shears







Grinder




Tin Snips

INSTALLATION

1. Determine **FILLER** location & measure length of filler needed (Mark cut line around housing)

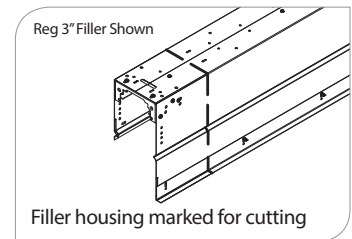

2. Disassemble **FILLER** Kit & Remove Reflector from previous row


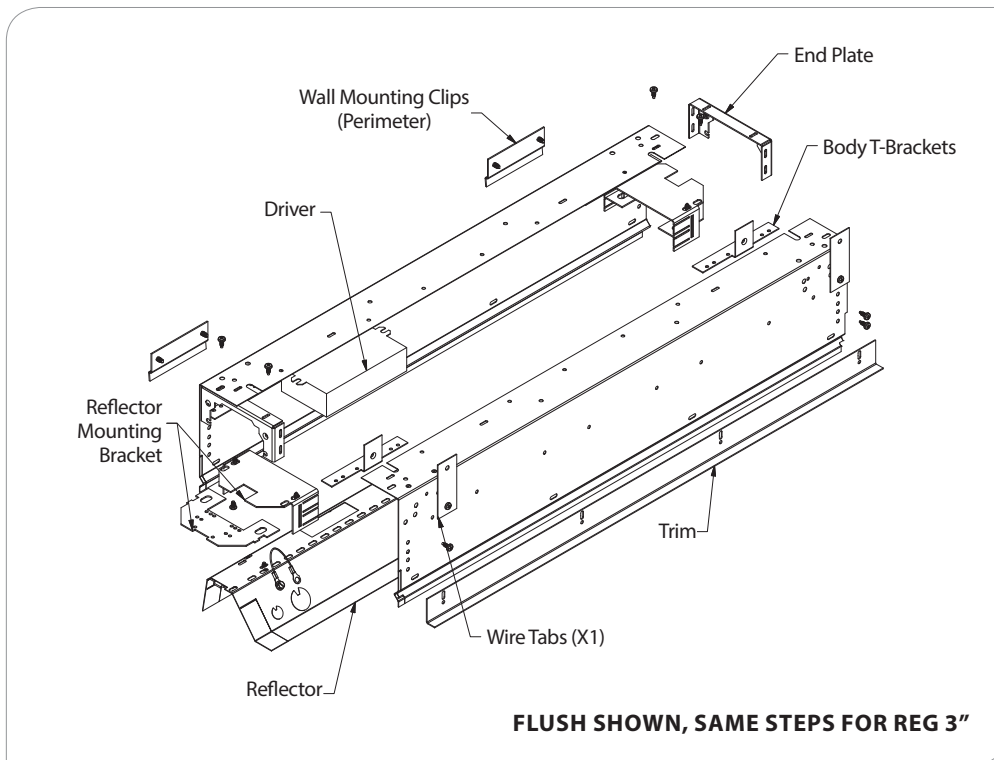


WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.







3. Measure Trim and Mark for Cutting

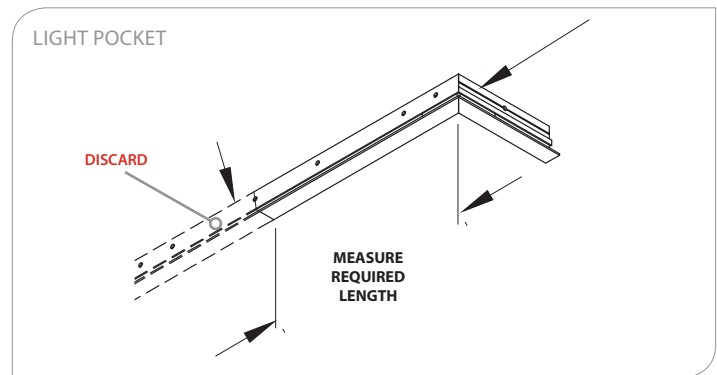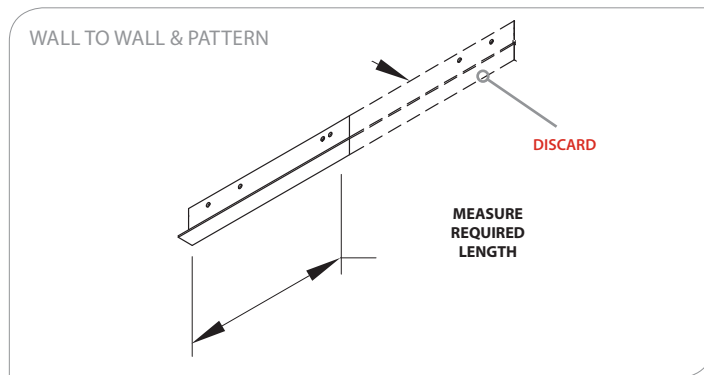

4. Cut and discard Filler Housing

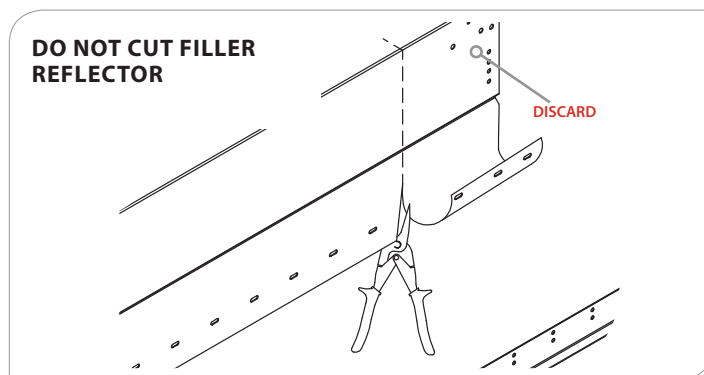

5. Assemble Filler Kit with Driver & Trim (Do Not install Reflector with LED arrays)

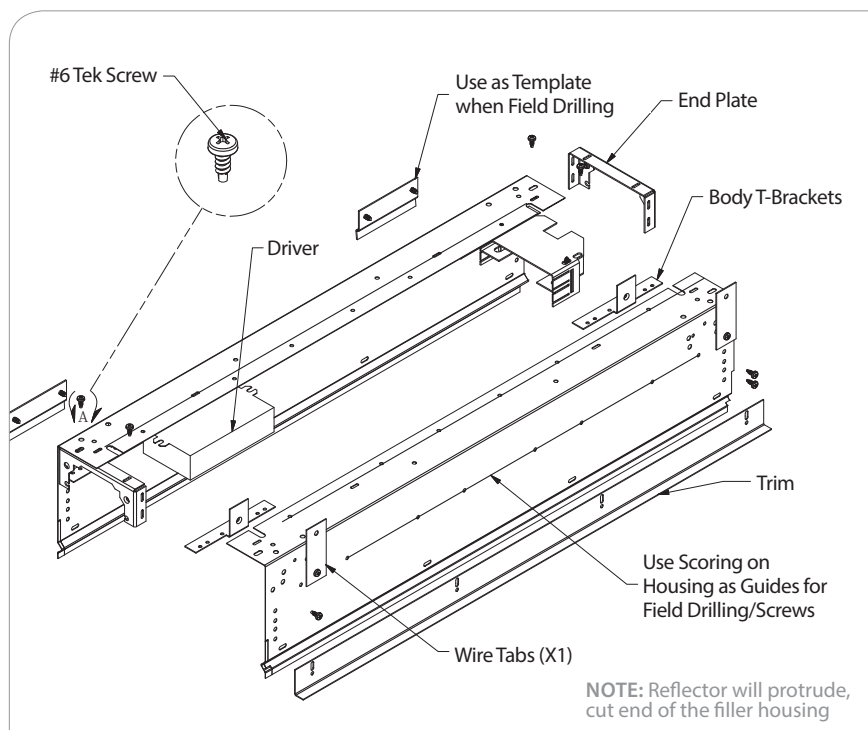


6. Install filler into ceiling & connect wiring

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.






7. Install spacer on reflector in previous housing

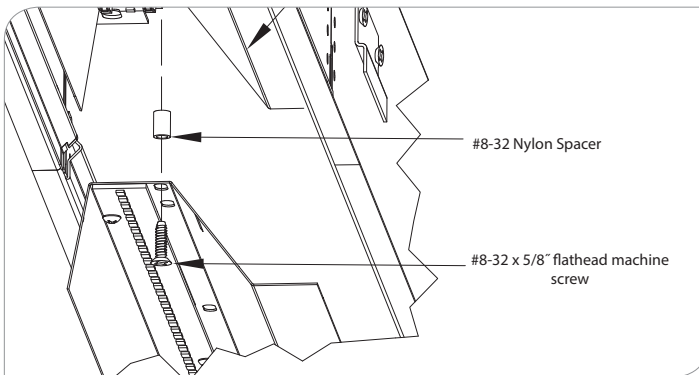


8. Install Filler Reflector 'above' previous Housing Reflector


DO NOT CUT REFLECTOR OR LED BOARDS

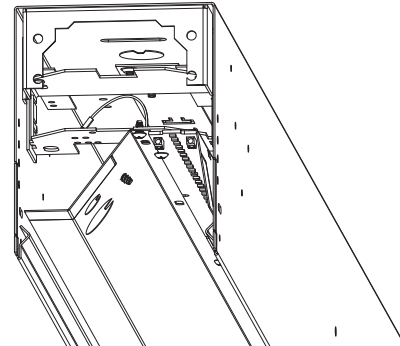

9. Slide Reflector Mounting Plate OUT and UP One Spot to secure Reflector to Previous Housing

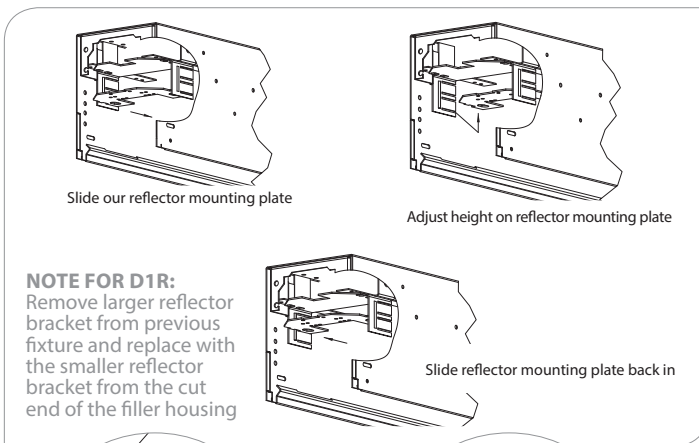

10. Screw Reflector into last Bracket of Previous Housing

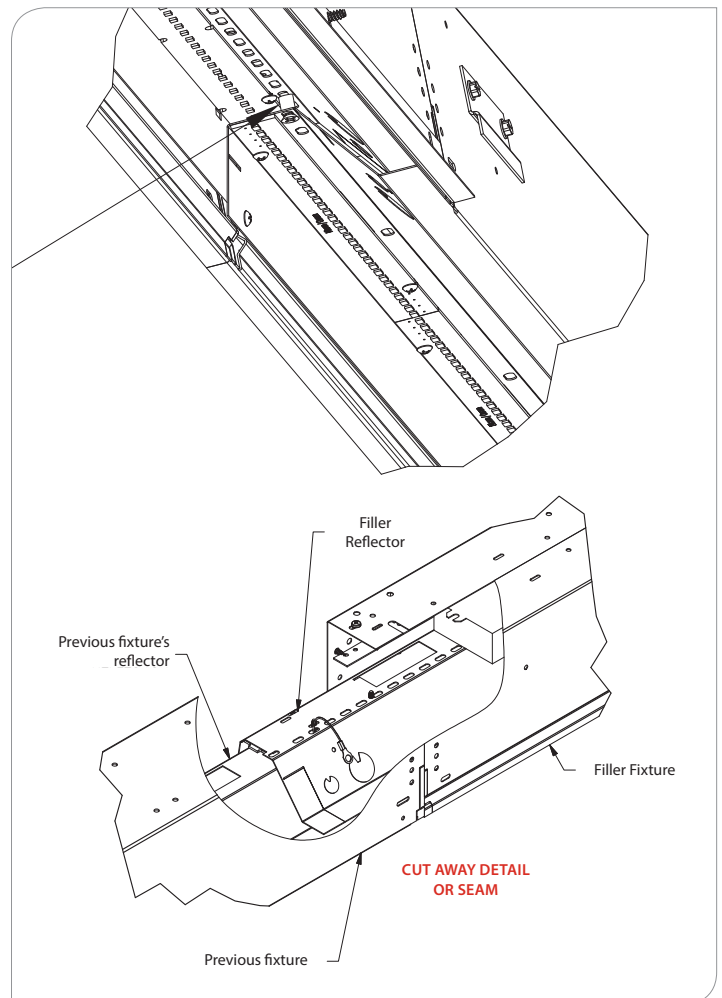

11. Complete wiring, install lens

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.

