




## INSTALLATION INSTRUCTIONS

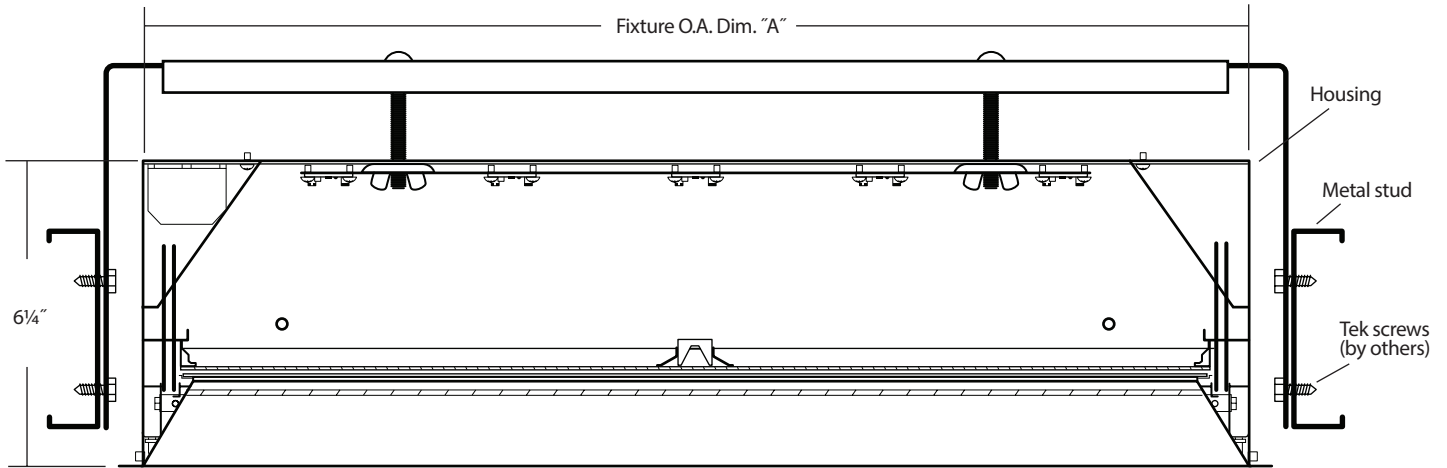

### GENERAL NOTES

1. Rough-in ceiling to accommodate fixture per dimensions given (see chart)
2. Screw mounting brackets onto metal studs or ceiling joist (see dim. "D")

**Rough-In Chart**

Fixture	"A"	"B"	"C"	"D"	"E"
9222	22 <sup>7</sup> / <sub>8</sub> "	24 <sup>3</sup> / <sub>8</sub> "	23 <sup>3</sup> / <sub>8</sub> "	14"	12 <sup>1</sup> / <sub>4</sub> "
9233	34 <sup>7</sup> / <sub>8</sub> "	36 <sup>3</sup> / <sub>8</sub> "	35 <sup>3</sup> / <sub>8</sub> "	26"	24 <sup>1</sup> / <sub>4</sub> "
9244	46 <sup>7</sup> / <sub>8</sub> "	48 <sup>3</sup> / <sub>8</sub> "	47 <sup>3</sup> / <sub>8</sub> "	38"	36 <sup>1</sup> / <sub>4</sub> "
9224	22 <sup>7</sup> / <sub>8</sub> "	48 <sup>3</sup> / <sub>8</sub> "	23 <sup>3</sup> / <sub>8</sub> "	38"	12 <sup>1</sup> / <sub>4</sub> "
9214	10 <sup>7</sup> / <sub>8</sub> "	48 <sup>3</sup> / <sub>8</sub> "	11 <sup>3</sup> / <sub>8</sub> "	38"	Axis
9204	4 <sup>7</sup> / <sub>8</sub> "	48 <sup>3</sup> / <sub>8</sub> "	5 <sup>3</sup> / <sub>8</sub> "	38"	Axis

### FIXTURE MOUNTING

1. Remove the lens frame from the square housing by pulling frame away from housing. When lens frame stops against torsion spring bracket, release torsion springs by hand pressing towards center of bracket. Frame will disengage. (See figure 1)
2. Remove knock outs from top/side of housing and raise square housing upward into rough-in opening.
3. Secure housing to mounting brackets and make all wiring connections. Replace lens frame when complete.






FIGURE 1

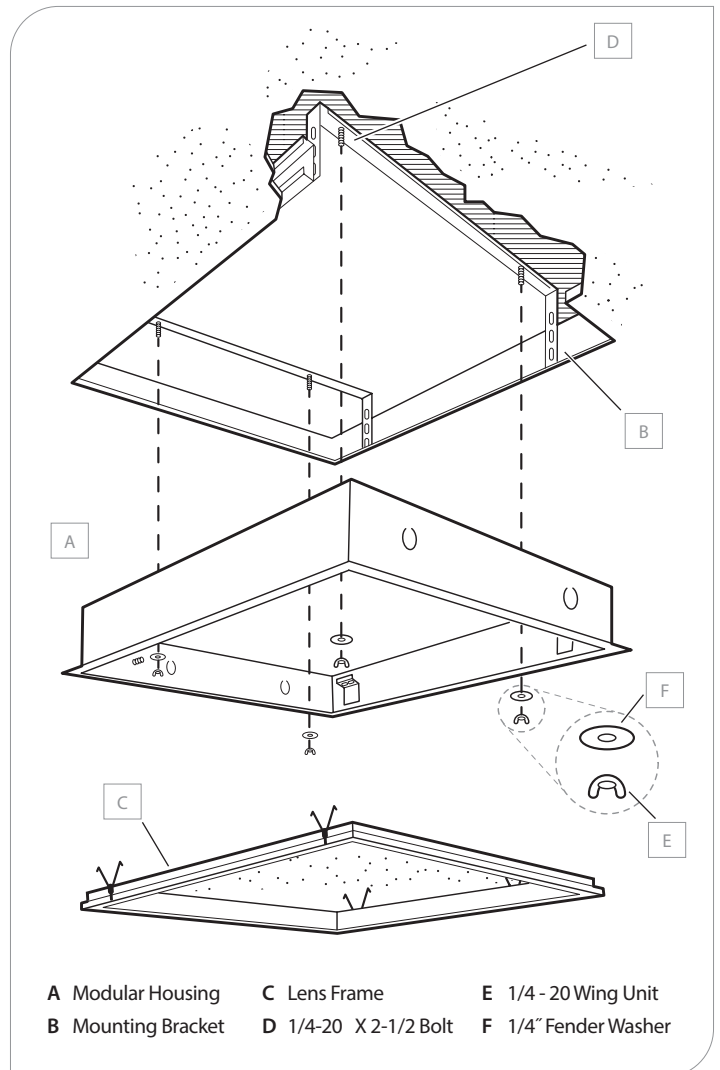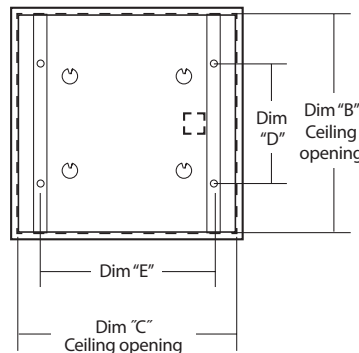

- A Modular Housing
- B Mounting Bracket
- C Lens Frame
- D 1/4-20 X 2-1/2 Bolt
- E 1/4 - 20 Wing Unit
- F 1/4" Fender Washer

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.