



INSTALLATION INSTRUCTIONS

PRULITE.COM 213.746.0360


X3 (HARD CEILING)

PARTS LIST

KIT PN #105271


A	100-00047-14	8-32 Hex Washer H.D. Self Tap Screw	2	C	90165	4" x 4" Junction Box Surface Mount Plaster Plate	1
B	91083A009	#8 x 7/16" O.D. Washer	2	D	101732	Surface Mount Ceiling Plate	4

3' x 3':

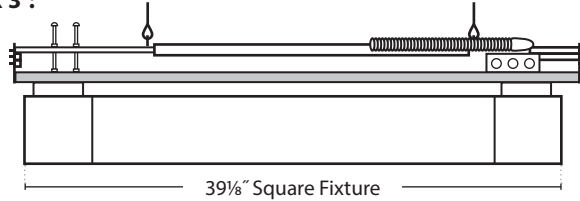


39 1/8" Square Fixture

2' x 2':

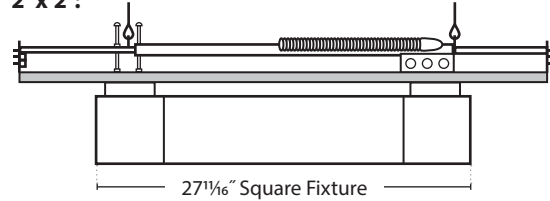

27 1/16" Square Fixture

4' x 4':

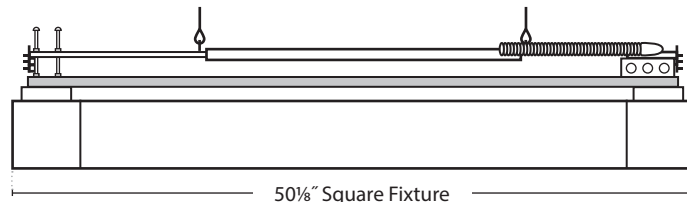

50 1/8" Square Fixture

INSTALLATION

1. Structural reinforcement required at all mounting locations.
2. 2' x 2', 3' x 3' and 4' x 4' fixtures are shipped with part number 100-00357-07 surface mount canopy factory attached to body assembly. (See figure 1.).
3. Surface mount ceiling plate (#101732) must be mounted collinear and parallel for proper alignment with surface mount spinning. (See mounting dimensions on page 2).
4. Part number #90165, surface mount plaster plate provided for adapting surface mount ceiling plate onto 4" x 4" junction box (See figure 3).

FIGURE 1.

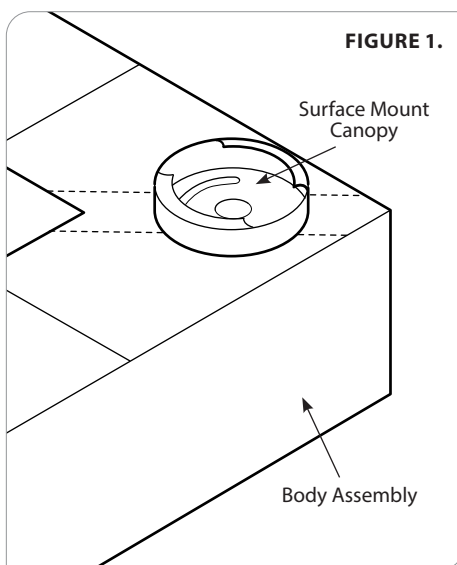


FIGURE 2.


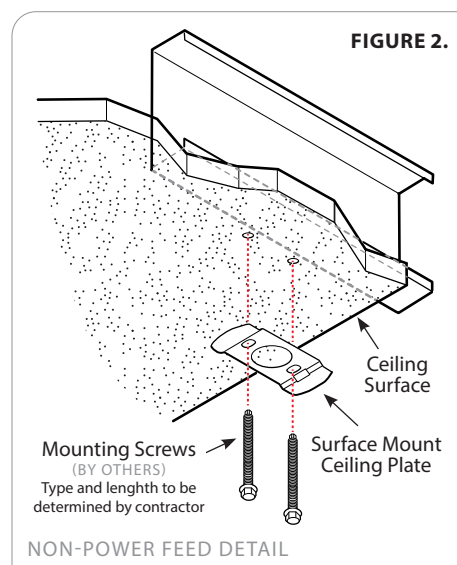


FIGURE 3.



WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



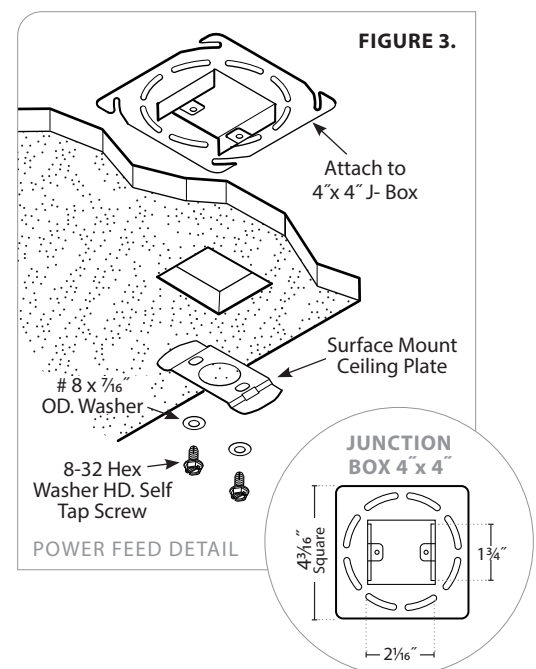

Quad & Quad Frame | Pendant & Surface




PRUDENTIAL LTG.

INSTALLATION INSTRUCTIONS

PRULITE.COM 213.746.0360

X3 (HARD CEILING)

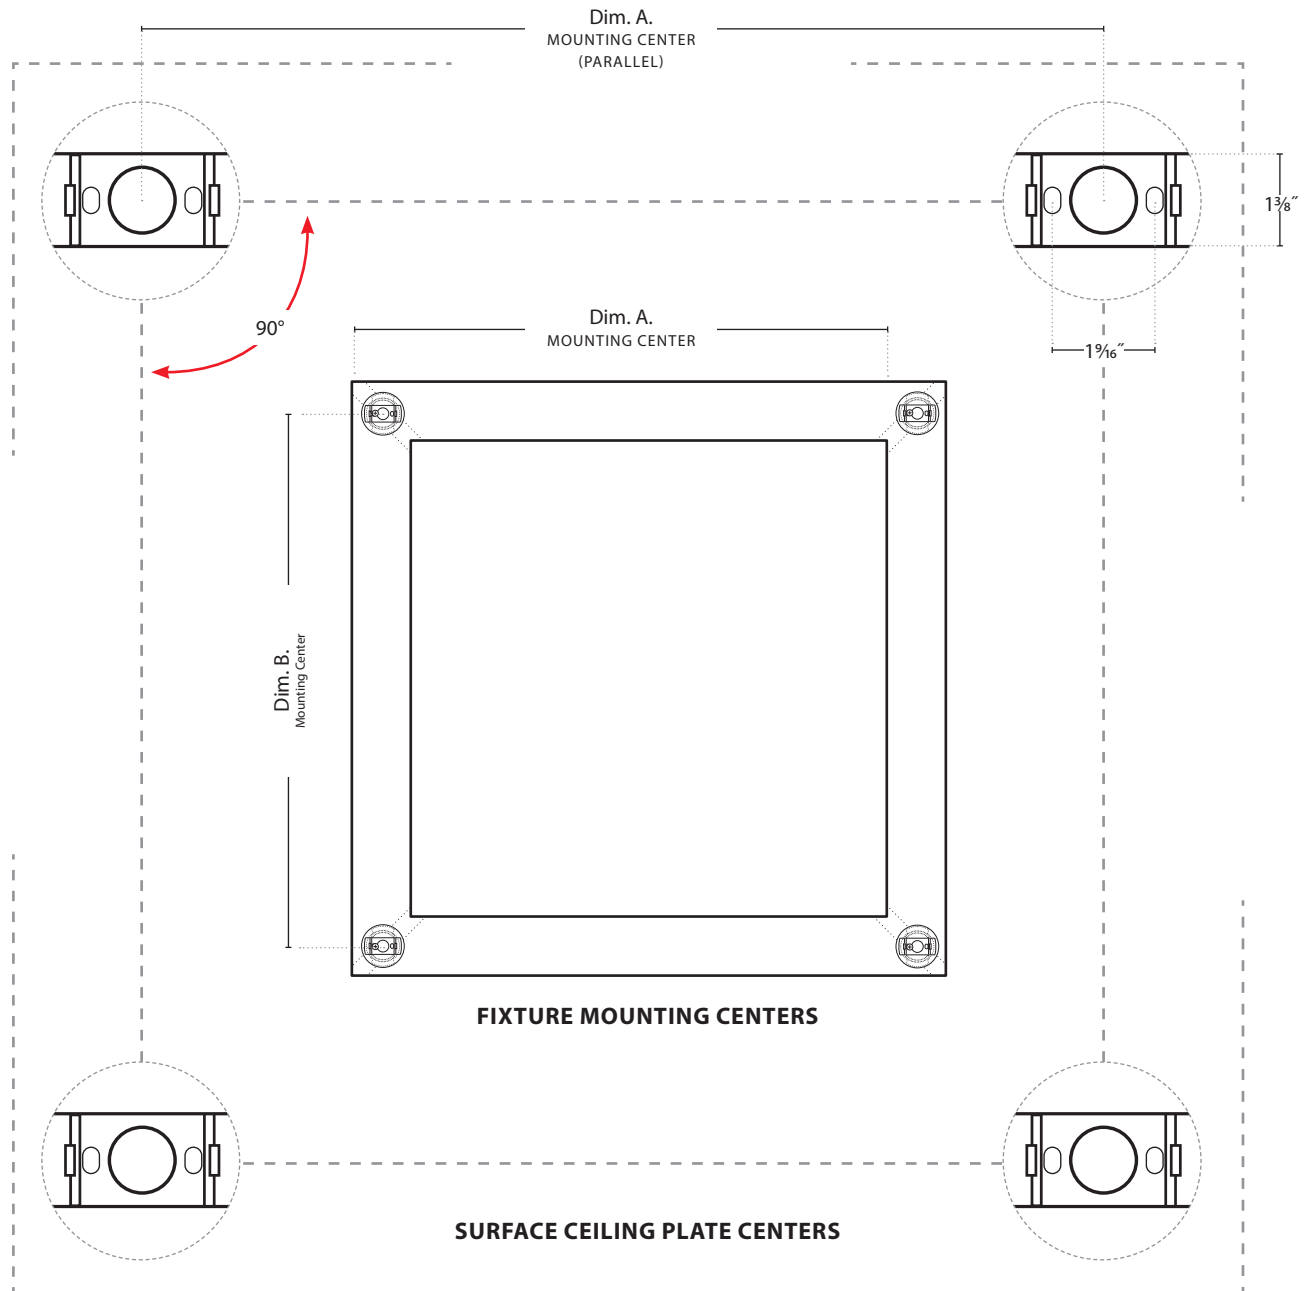

MOUNTING	SIZE	DIM A	DIM B
Quad	1' x 4'	6 5/16"	45"
Quad + Frame	2' x 2'	22 5/8"	22 5/8"
Quad	2' x 4'	22 5/8"	45"
Quad + Frame	3' x 3'	34"	34"
Quad + Frame	4' x 4'	45"	45"

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)

PRULITE.COM 213.746.0360

1. Make all wire connections.
2. Align fixture with surface mount ceiling plates.
3. Place fixture onto ceiling surface and rotate surface mount spinning over surface mount ceiling plate. (See figure 4.)



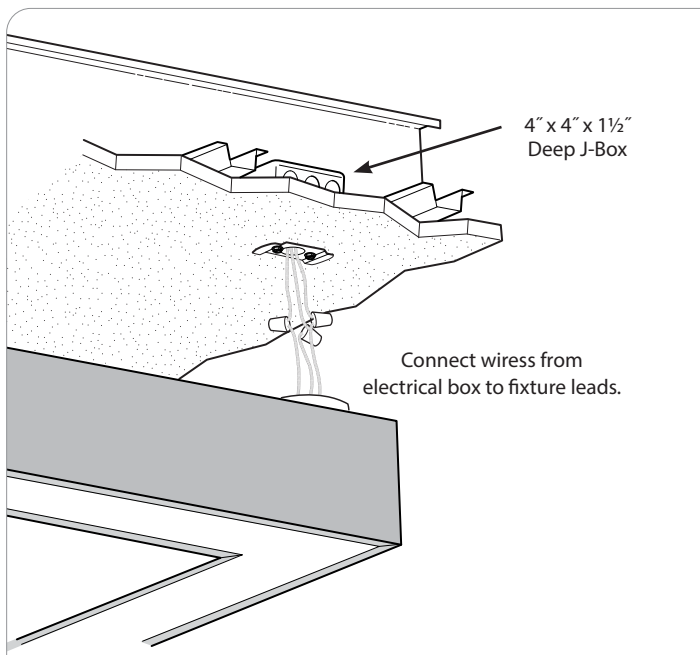


FIGURE 4.

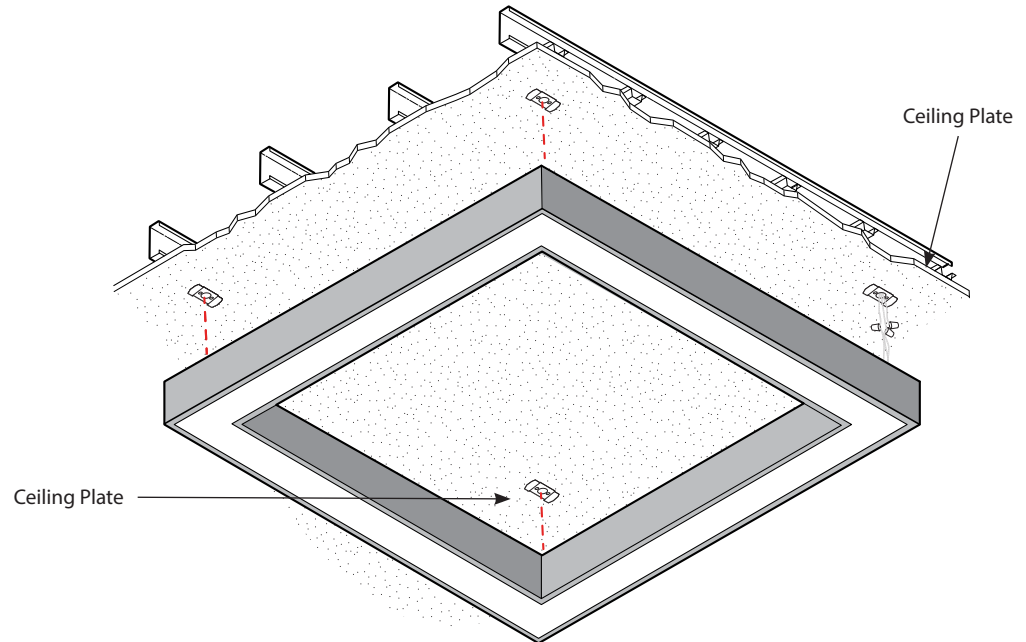

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.

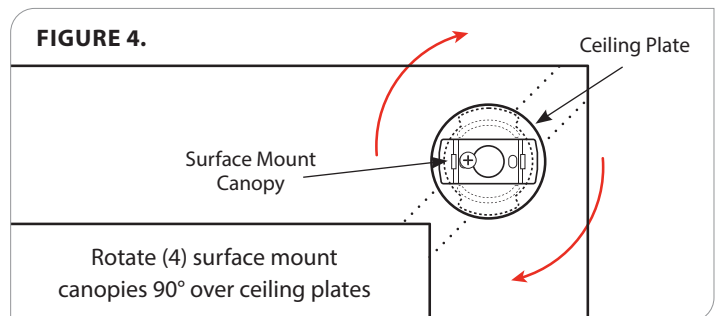