



# SDP + RDP | SSC X1












## Top-Swivel Stem Mount

### INSTALLATION INSTRUCTIONS





PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

PARTS LIST	PART NO.	DESCRIPTION	QTY.
	91382	SSC (Top-Swivel Stem Mount) Adaptor Bracket	2
	100-00126-14	1/4" Fender Washer	8
	100-00035-14	#8-32 1/2 Hex Washer Head MS Screw	2
	100-00255-14	1/4-20 Keps Lock Nut	4
	100-00250-14	1/4-20 x 5/8" Truss Head Screw	4
	100-00128-14	#8-32 x 5/8" CS Undercut Set Screw	4
	100-00148-08	Mounting Strap	1
	100-00103-08	1/4" I.P.S. Ball Swivel	1
	100-00307-14	Lock Washer	1
	100-00231-14	1/4" Lock Nut	3
	90934	24" —	1
	90937	48" —	
	90940	96" —	
	—	Custom —	

#### CANOPIES:

	109991	Round Dot Pendant Canopy	1
	109993	Square Dot Pendant Canopy	1

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit [prulite.com](http://prulite.com) for most current data.  
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



# SDP + RDP | SSC X1

## Top-Swivel Stem Mount


### INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


#### COMPATIBLE CEILING GRID SYSTEMS:

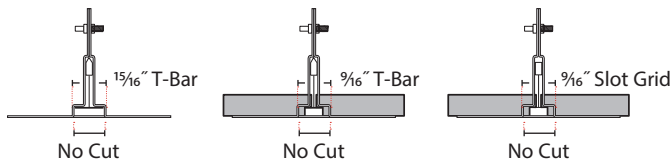

1 5/16" GRID /  
TEGULAR TILE

9/16" GRID /  
TEGULAR TILE

9/16" SLOT OR  
BOLT GRID

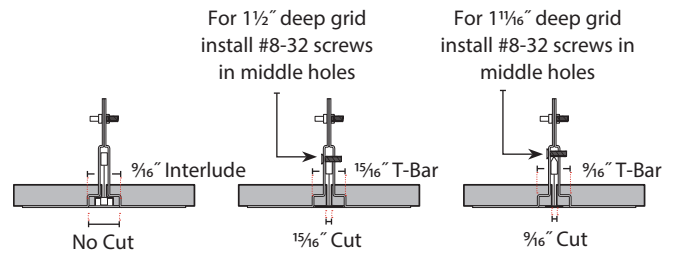


9/16" INTERLUDE  
GRID

1 5/16" GRID /  
CEILING TILE


9/16" GRID /  
CEILING TILE

## GENERAL INSTALLATION


- 1)** Trim along edge of obround pilot slot for desired grid width. 9/16" or 1 5/16" option. (See Figure 1).

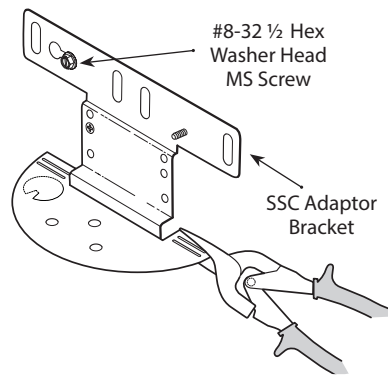

**FIGURE 1:**  
GRID CUT WIDTH

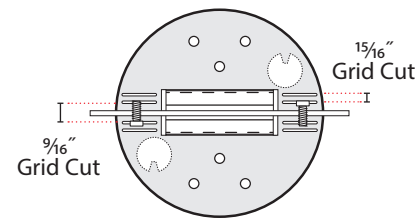


- 2)** Drill 1/8" hole through pilot holes to secure adaptor flush with grid. (See figure 2).

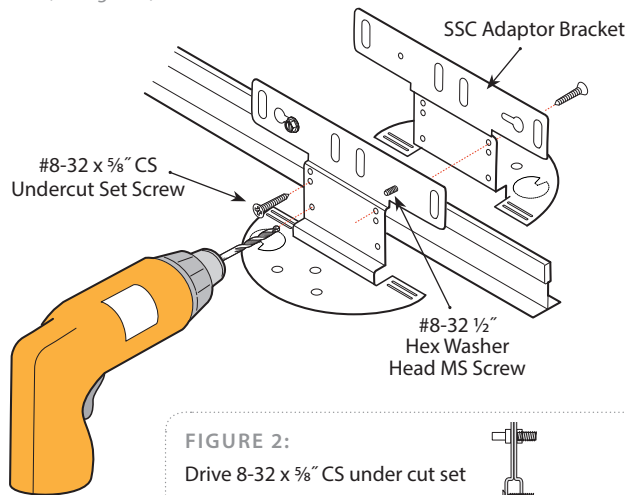


**FIGURE 2:**

Drive 8-32 x 5/8" CS under cut set screw through pilot hole, grid and second adaptor. Be sure adaptor is flush with grid.



- 3)**

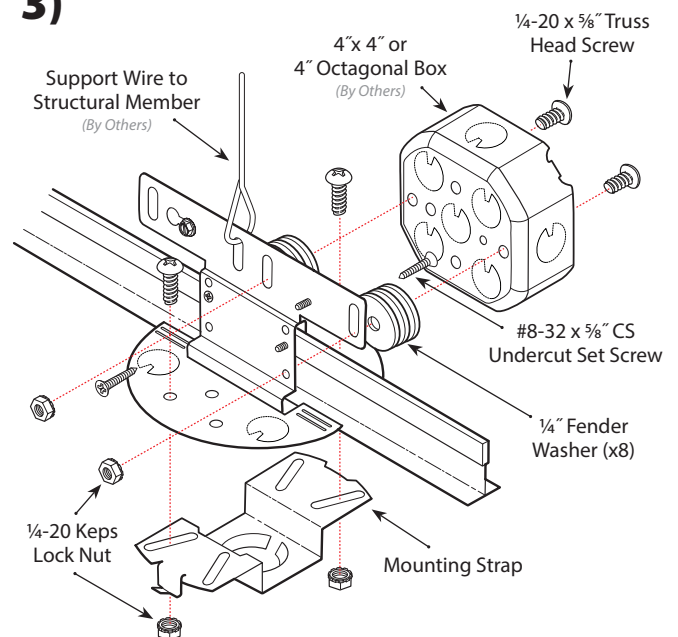

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit [prulite.com](http://prulite.com) for most current data.  
© 2015 All rights reserved - All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



# SDP + RDP | SSC X1

## Top-Swivel Stem Mount


### INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

4)

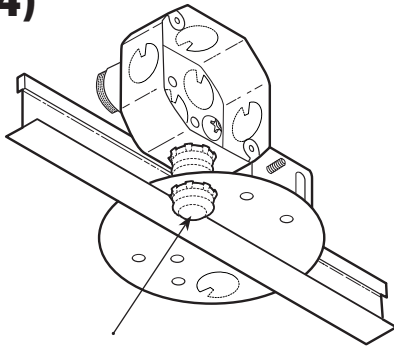


1/2" x 1 1/2" min. length nipple from  
j-box to SSC adaptor bracket  
(Nipple and lock nuts by others)

5)

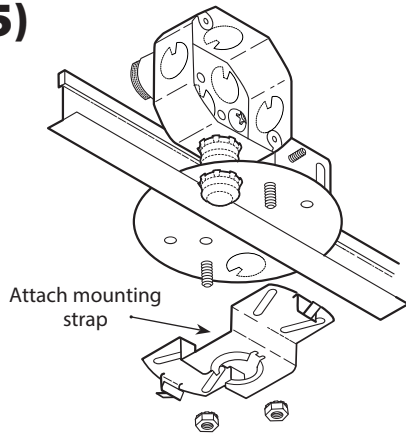


Attach mounting  
strap

#### TRIM CEILING TILE:

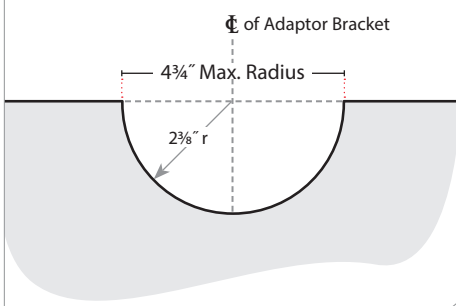

6)

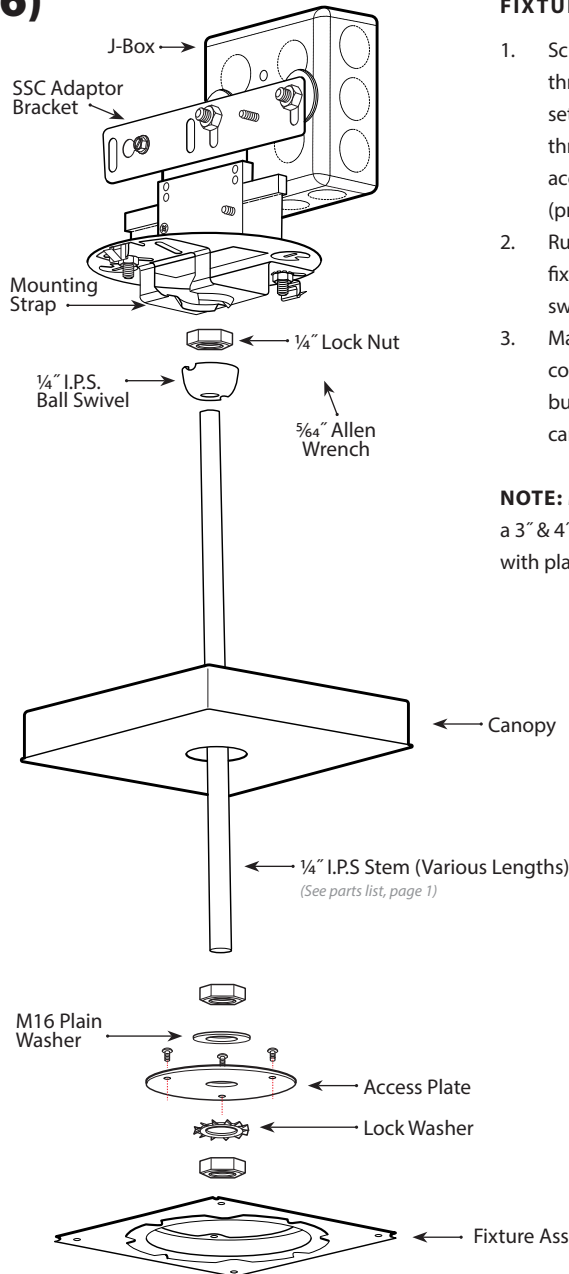

#### FIXTURE ASSEMBLY:

1. Screw ball swivel to one end of the threaded stem. Secure in place with set screw. Insert other end of stem through hole in canopy and fasten to access with 1/4" I.P.S. nuts and washers (provided).
2. Run wires through stem and raise fixture assembly to ceiling. Insert ball swivel into mounting strap.
3. Make all necessary wiring connections per national and local building requirements. Hand press canopy onto mounting strap.

**NOTE:** Mounting strap will accommodate a 3" & 4" octagonal box, or a 4" square box with plaster ring.

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.  
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058