


Pru1 Cylinders

Pendant and Surface

INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

PART	PART NO.	DESCRIPTION	QTY
	—	8-32 x ½″ Machine Screw	2
	—	2mm Hex Key Wrench	1
	100-00651-14	In-Line Strain Relief (For Cable Versions Only)	1
	100-00020-31	Louver (Optional)	
	100-00021-31	Softening Lens (Optional)	
	100-00025-31	Magnetic Ring Holder (Optional)	
SCD CEILING MOUNT			
	(by others)	3″ Round Mud Ring Adapter for 4″ Square Box, with 8-32 Tapped Ears on 2¾″ Centers — RACO 767 (½″ Raised) or RACO 756 (½″ Raised)	
	(by others)	3″ Round Mud Ring Adapter for 4″ Square Box with 8-32 Tapped Ears on 2¾″ Centers — RACO 767 (½″ Raised) or RACO 756 (½″ Raised)	
X3 (HARD CEILING) + X7 (TRIMLESS MUD-OVER FLANGE)			
	100-00200-08	4″ Square Box — RACO 256 (3½″ Depth)	1
	100-00201-08	4″ Square J-Box Extender	1
X3 (HARD CEILING) ONLY			
	100-00655-14	4″ Square-to-Round Mud Ring (⅝″ Depth)	1

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Pru1 Cylinders

Pendant and Surface


INSTALLATION INSTRUCTIONS

SCD CEILING MOUNT


PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


MOUNTING

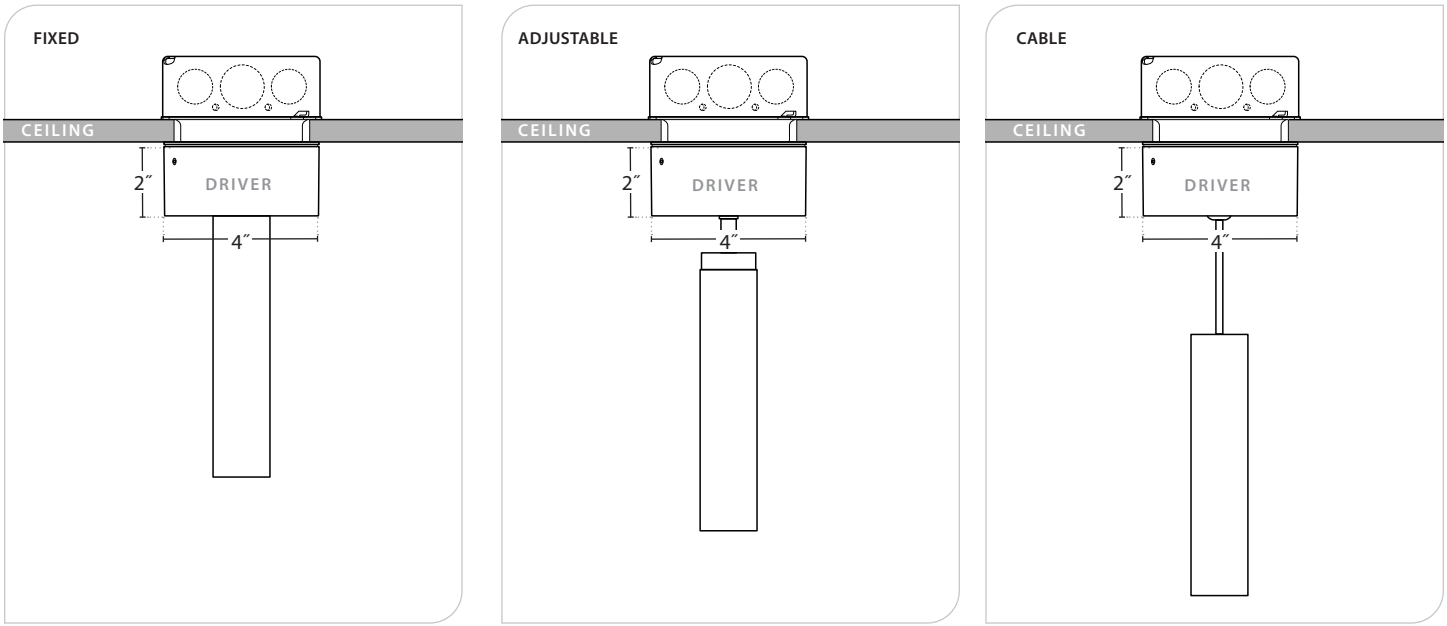

INSTALLATION

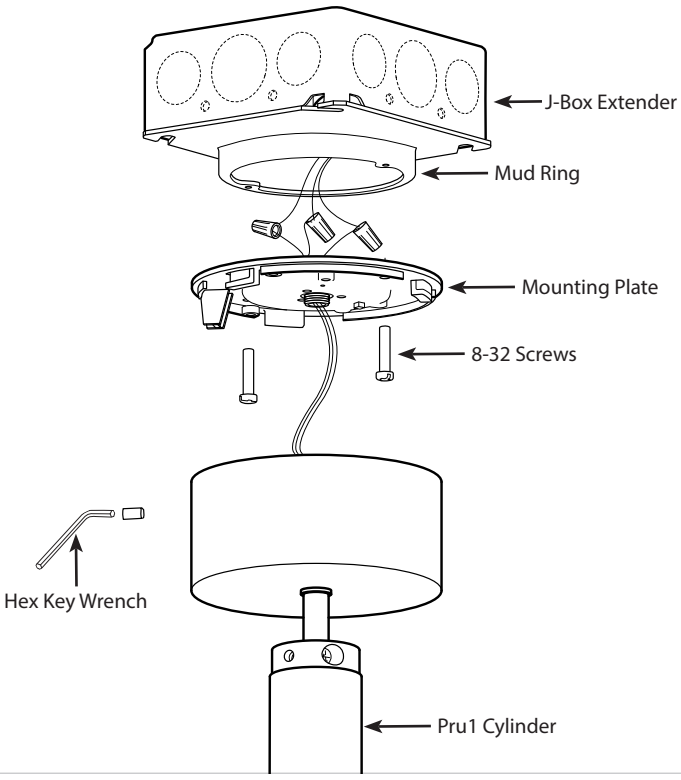


1) Remove set screw with provided 2mm hex key wrench. Twist canopy counterclockwise to access mounting holes on back plate.

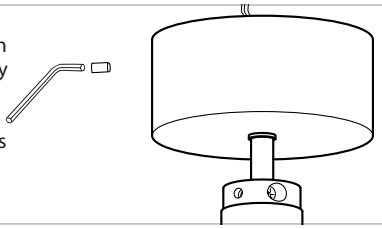

2) Make all necessary power supply connections via J-box.

3) Attach mounting plate to mud ring via (x2) 8-32 screws provided.



WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Pru1 Cylinders

Pendant and Surface


INSTALLATION INSTRUCTIONS

X3 (HARD CEILING)


PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

MOUNTING

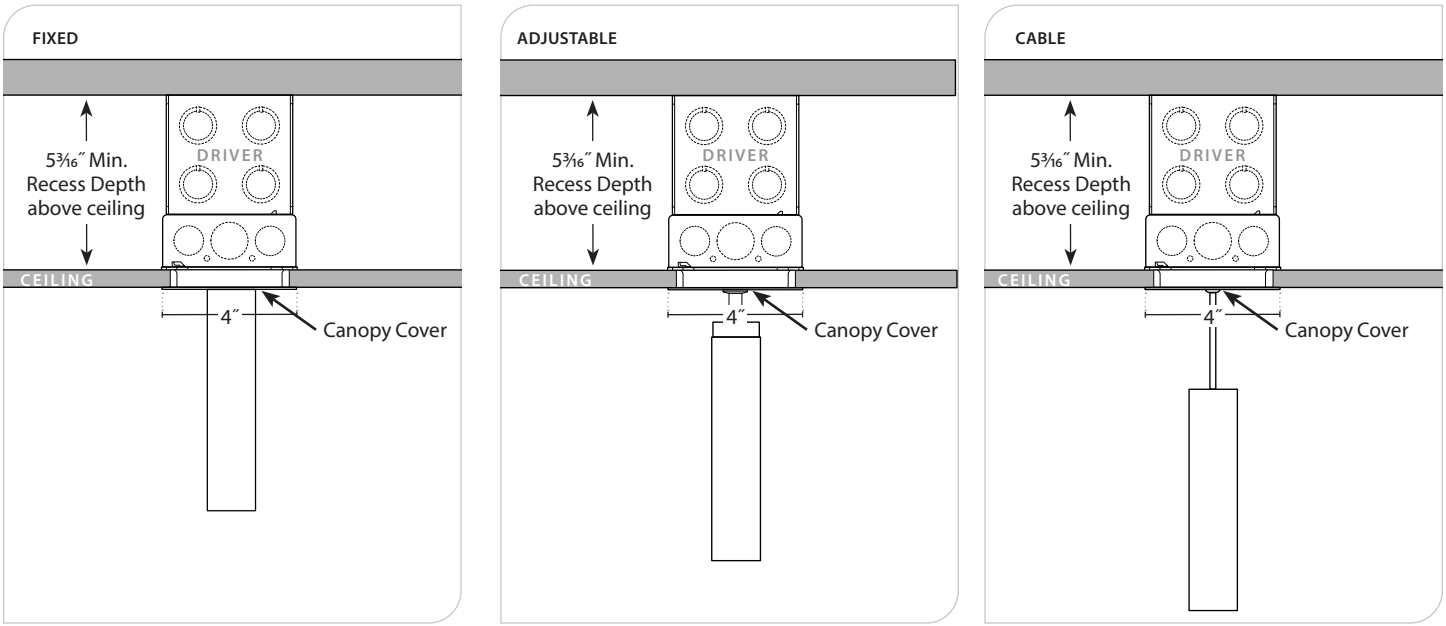


INSTALLATION

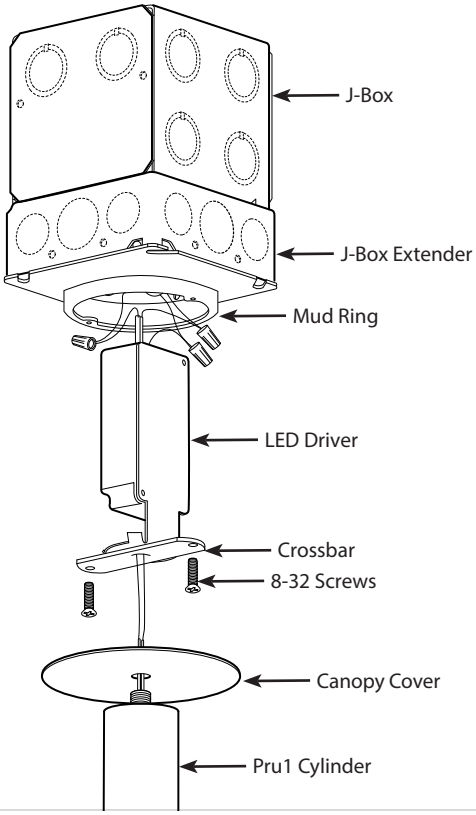


1) Fasten 4″ x 3½″ deep J-box to structural blocking or framework.

2) Attach the J-box extender and mud ring.

3) Make all necessary power supply connections via J-box.




4) Install crossbar with LED driver assembly to mud ring via (x2) provided countersunk 8-32 Screws.



5) **FIXED** **ADJUSTABLE** Attach Pru1 Cylinder to crossbar via threaded nipple on back side.

CABLE Attach canopy cover plate to crossbar with provided threaded bushing.

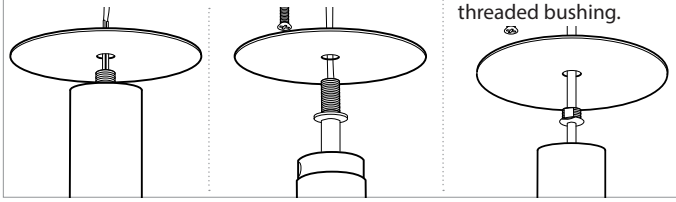

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Pru1 Cylinders

Pendant and Surface


INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


X7 (TRIMLESS MUD-OVER FLANGE) CEILING MOUNT

MOUNTING

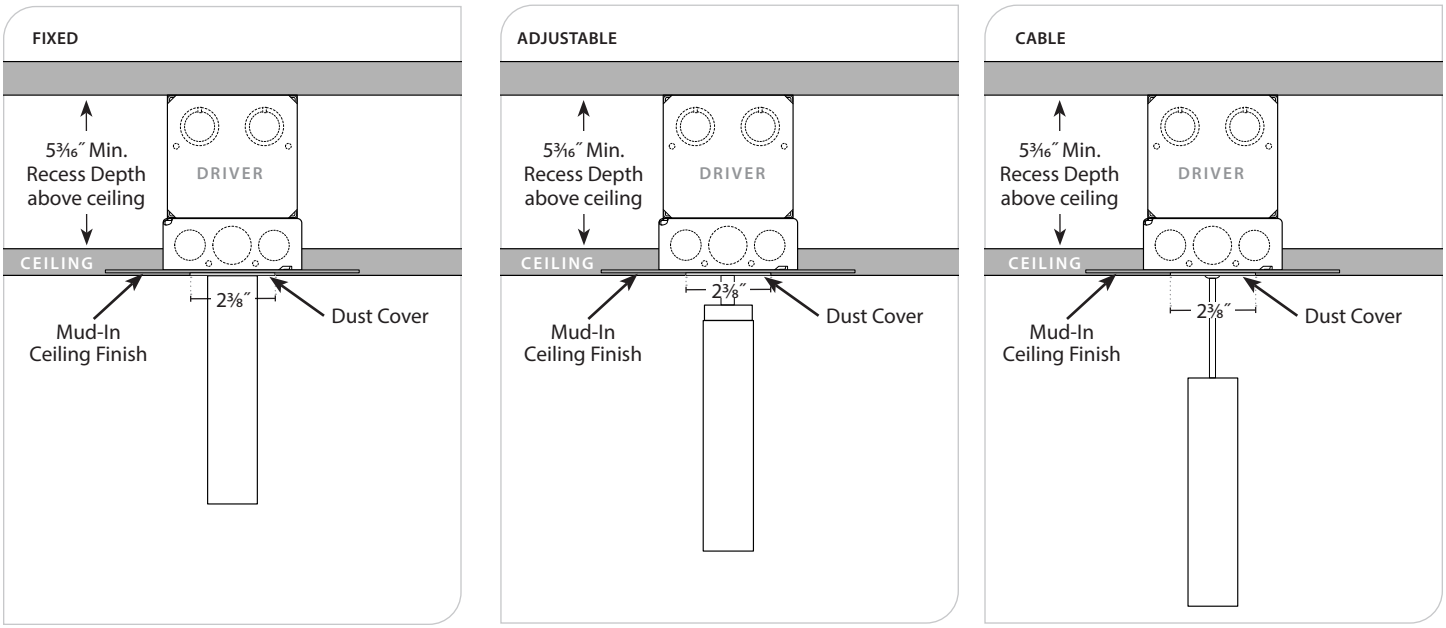


INSTALLATION

1) Fasten 4″ x 3½″ deep J-box to structural blocking or framework.

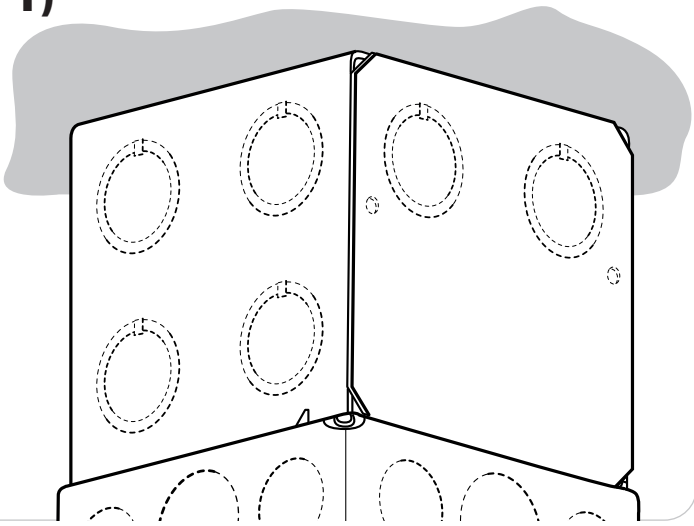

2) Attach the J-box extender.

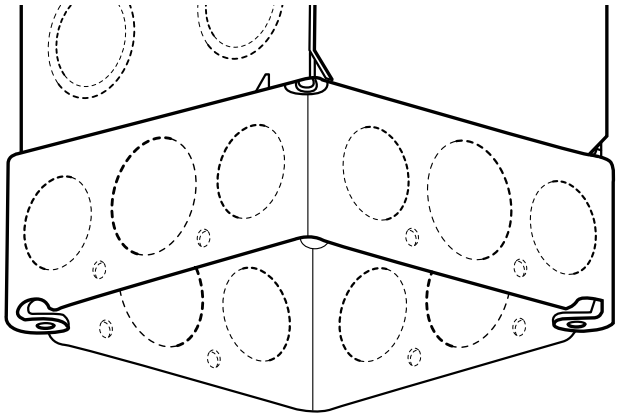

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Pru1 Cylinders

Pendant and Surface


INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

X7 (TRIMLESS MUD-OVER FLANGE) CEILING MOUNT


3) Attached Mud-Over plate via provided countersunk (2x) 8-32 Screws.

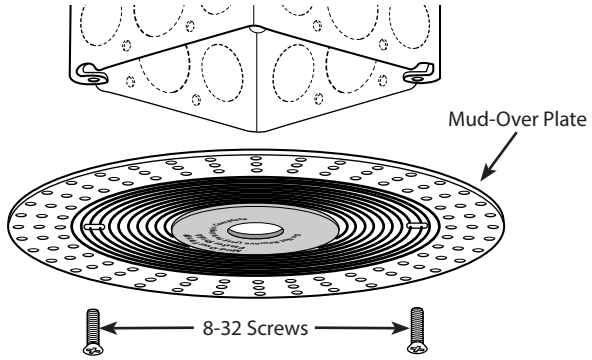


4) Ensure dust cover is installed and any power supply wires are still easily accessible.

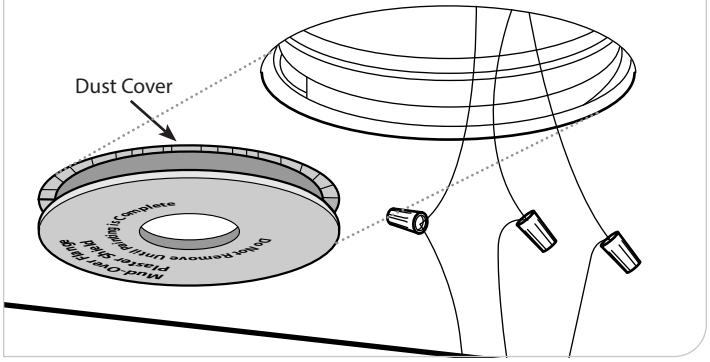


5) Apply mudding and ceiling finish.

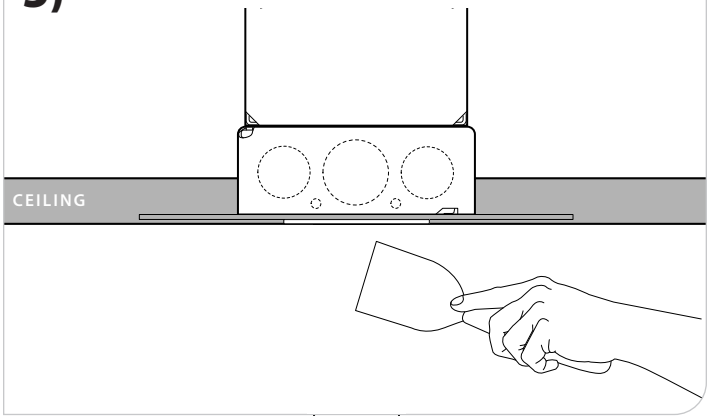


6) Remove dust cover shield.

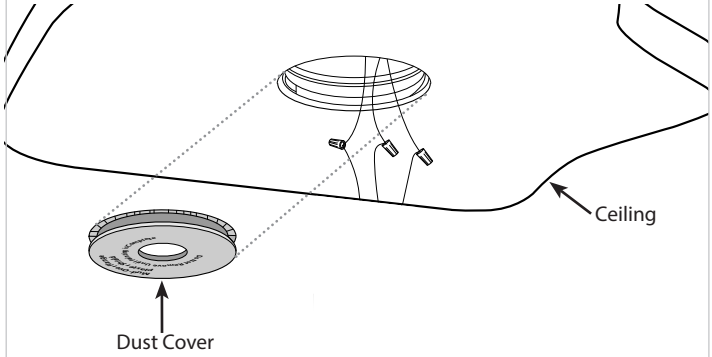

7) Make all necessary power supply connections.

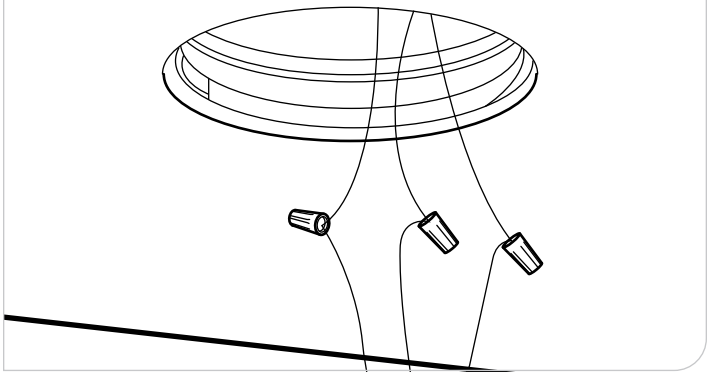

8) Install Pru1 Cylinder by screwing in assembly then snap-in to finished ceiling.

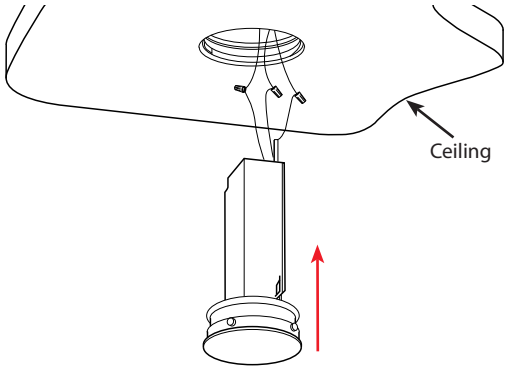

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Pru1 Cylinders

Pendant and Surface

INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.


PRULITE.COM 213.746.0360


SUPPLEMENTAL INSTRUCTIONS FOR CABLE VERSION

1) To adjust suspension height, slide power cord through strain relief as shown. Cut extra cord and make electrical connections.

2) Slide canopy plate onto the nipple.


3) Thread nipple to the cross-bar through the canopy hole to secure fixture onto the electrical box.





OPTIONAL

Install optical accessories.
Ensure the magnetic ring holder is installed last.

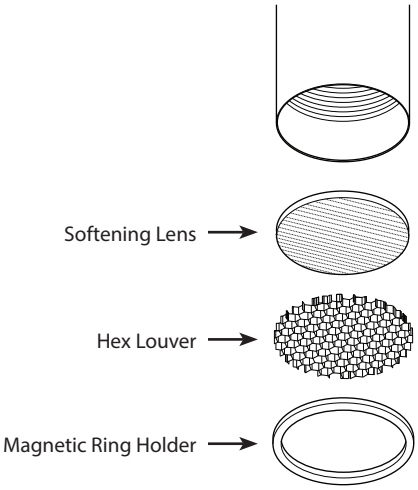

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional..

USA Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058