



















INSTALLATION INSTRUCTIONS

X1 (T-BAR SURFACE)

PARTS LIST	PART NO.	DESCRIPTION	QTY.
	101959	T-Bar Surface Mount — Main Rail	2
	101961	T-Bar Surface Mount — Track Rail	2
	101960	T-Bar Surface Mount — Extension Rail	2
	101977	T-Bar Surface Mount — Clamp	4
	100-00035-14	#8-32 x 3/8" Hex Washer Head Self Tap Screw	18
	100-00037-14	#6 x 1/2" Hex Head Self Drill Tek Screw	8
	100-00141-14	#8 x 1/4" Hex Washer Head SM Screw (Type B)	1
	100-00114-14	1/4-20 x 3/8" Truss Head Machine Screw	2
	100-00283-14	1/4-20 x 5" Round Head Machine Screw	4
	100-00165-14	1/4-20 Hex Nut	1
	100-00255-14	1/4-20 Keps Hex Nut	2
	100-00008-14	#10 1/4" x 9/16" O.D. Washer	8
	100-00126-14	1/4" x 1 1/4" O.D. Fender Washer	4
	106895	T-Bar Surface Mount — 4" x 4" J-Box Strap	1
	104032	Offset Surface Plaster Plate Assembly	1
	101732	Surface Mount — Ceiling Plate	3

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.






INSTALLATION INSTRUCTIONS

PRULITE.COM 213.746.0360

X1 (T-BAR SURFACE)

MOUNTING INSTALLATION

HARDWARE KIT:

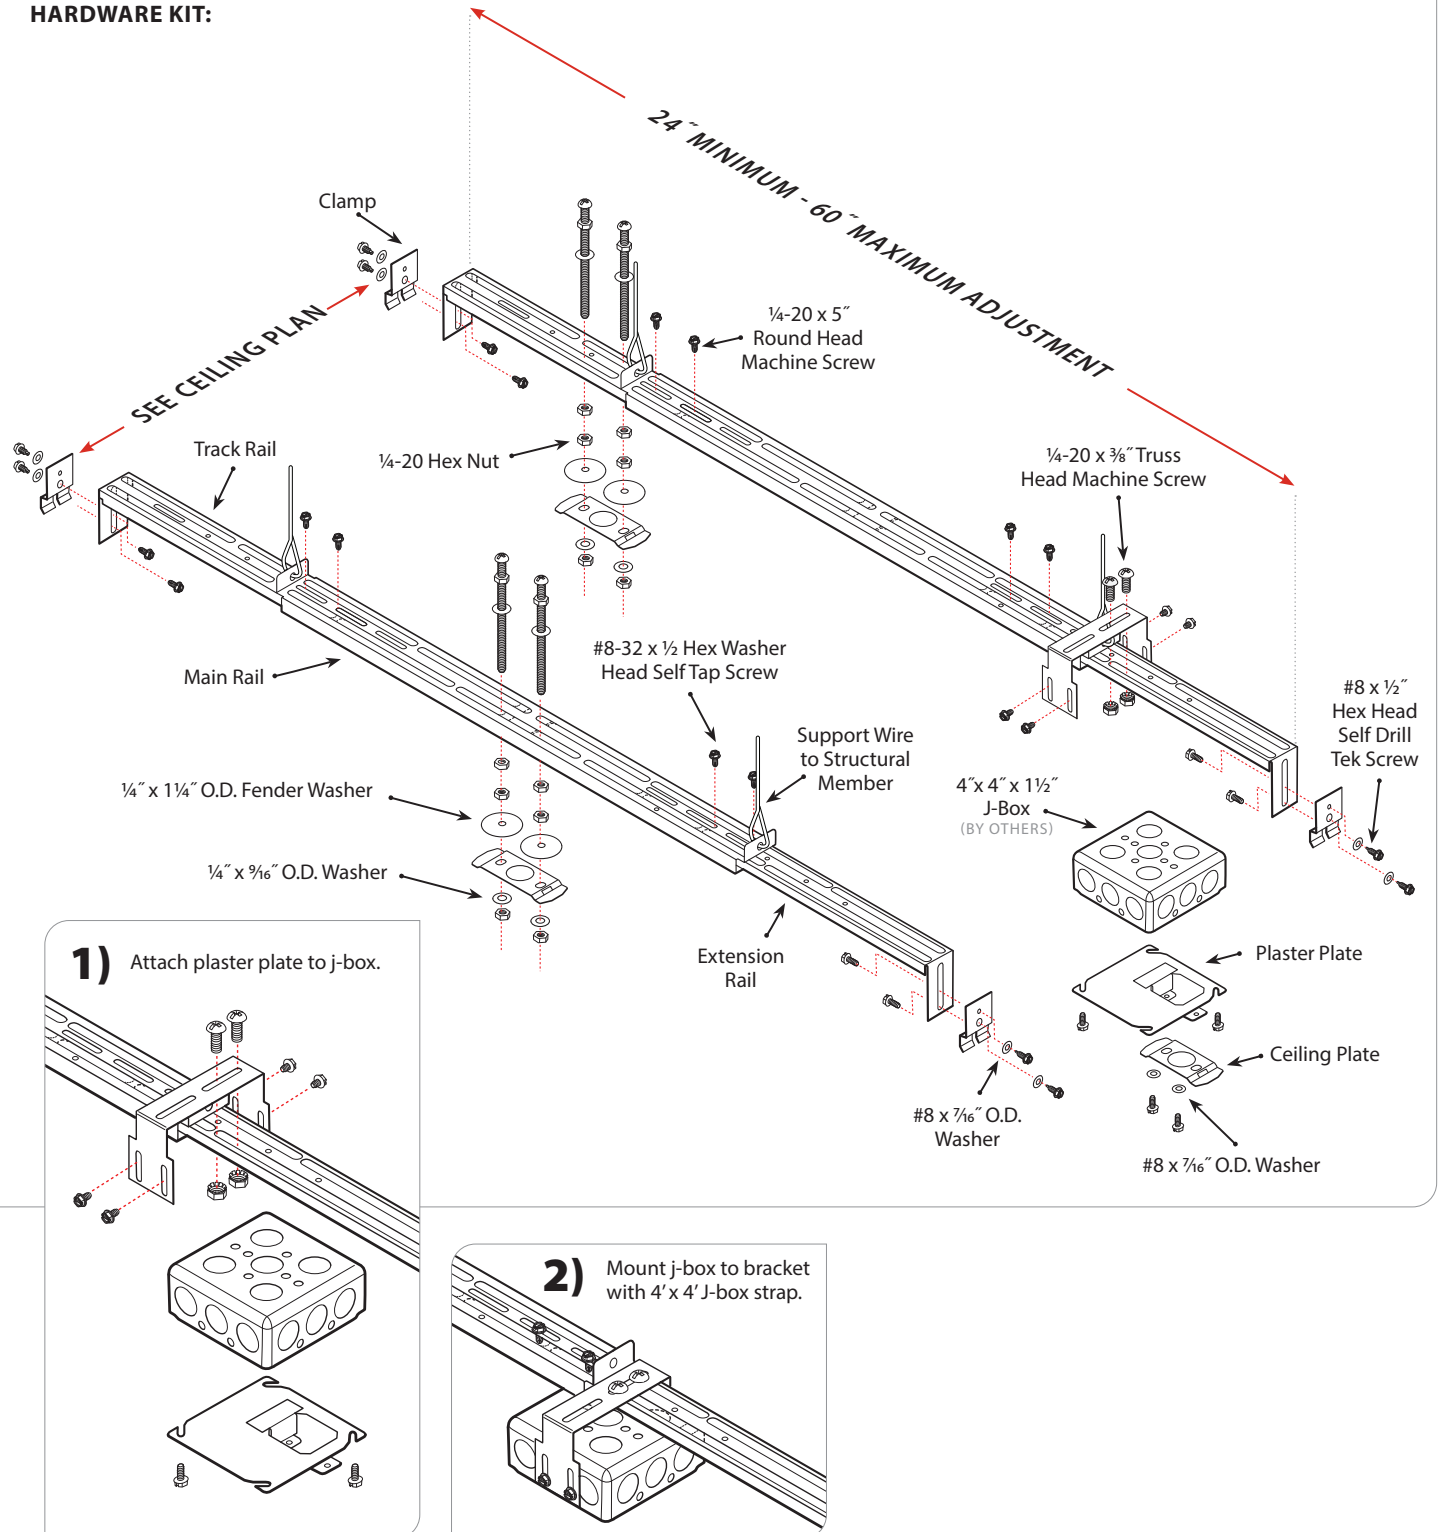

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.





INSTALLATION INSTRUCTIONS


PRULITE.COM 213.746.0360

X1 (T-BAR SURFACE)

TILE MOUNT INSTALLATION


1. Drill $\frac{3}{8}$ " holes and cut t-bar ceiling tiles prior to installing fixture.
2. Use drill pattern shown on t-bar tile mount hole plan view (below).
3. Place tiles in t-bar grid in plan view orientation shown.
4. Place mounting brackets onto t-bar in dimensional orientation shown on applicable t-bar mounting plan view.

PLAN VIEW (2' x 2'):

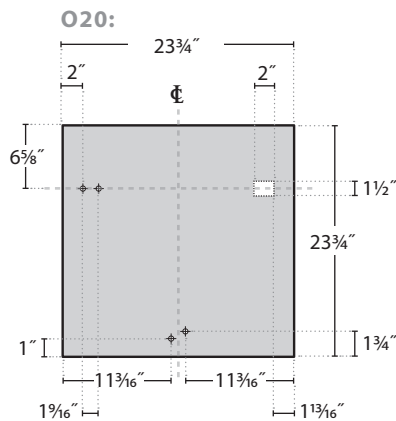


- J-Box Plaster Plate Cutout
- Drill $\frac{3}{8}$ " Diameter Hole


O30:

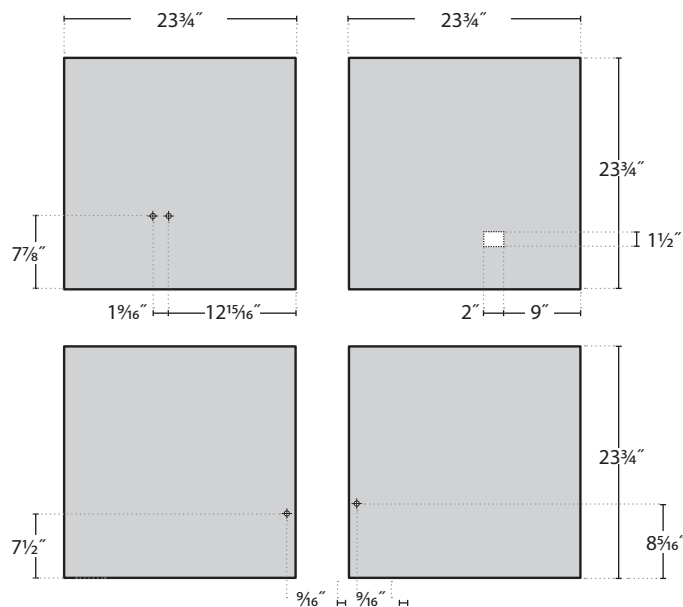

PLAN VIEW (4' x 4'):

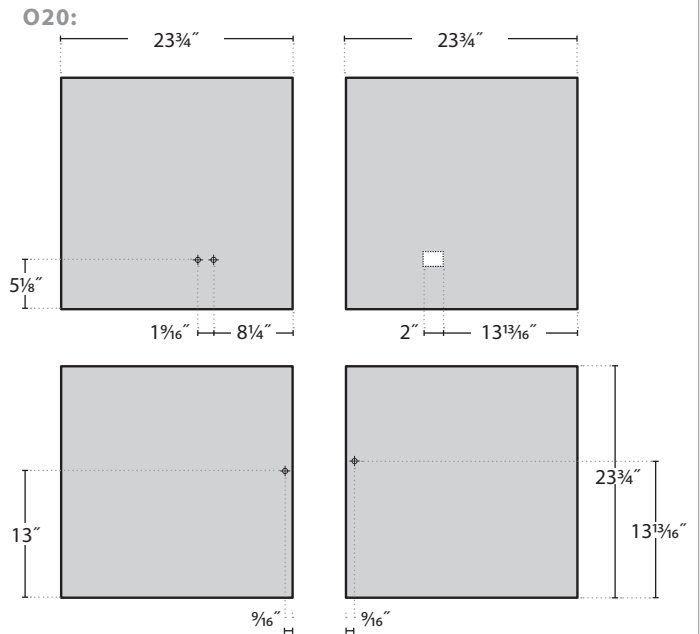

O40:

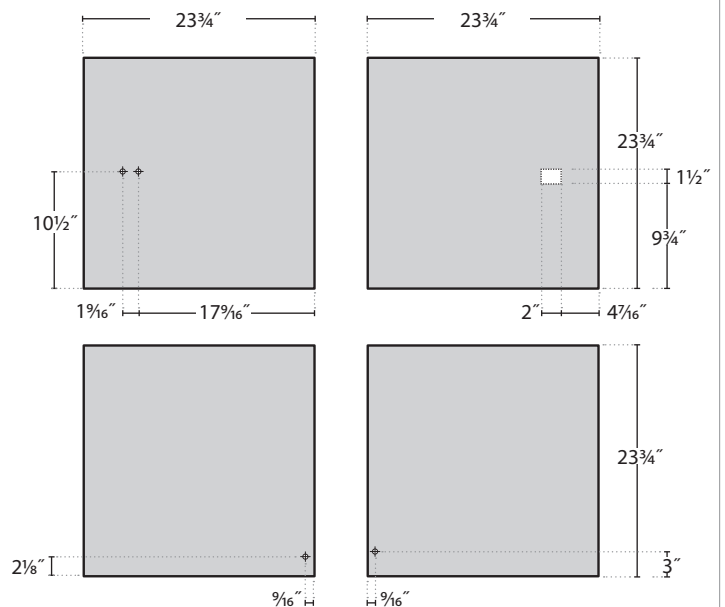

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.





INSTALLATION INSTRUCTIONS


PRULITE.COM 213.746.0360

X1 (T-BAR SURFACE)

T-BAR MOUNTING


(2' x 2'):

O20:




(4' x 4'):

O20:

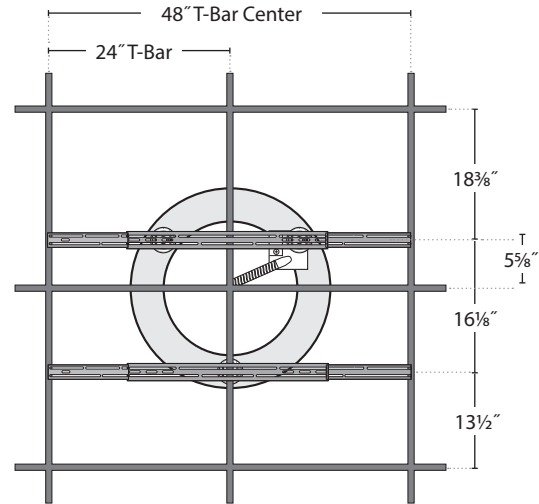


(4' x 4'):

O30:

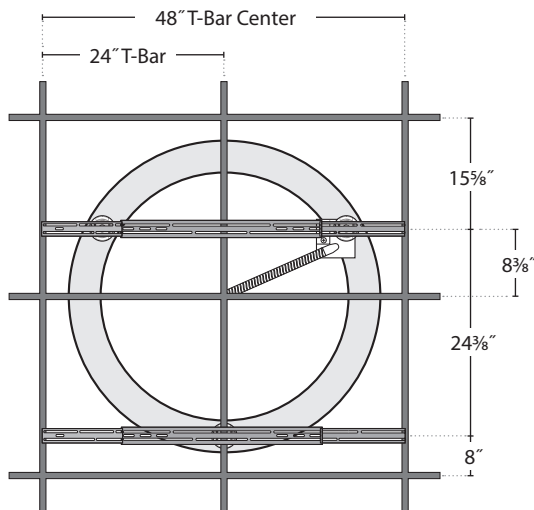

(4' x 4'):

O40:

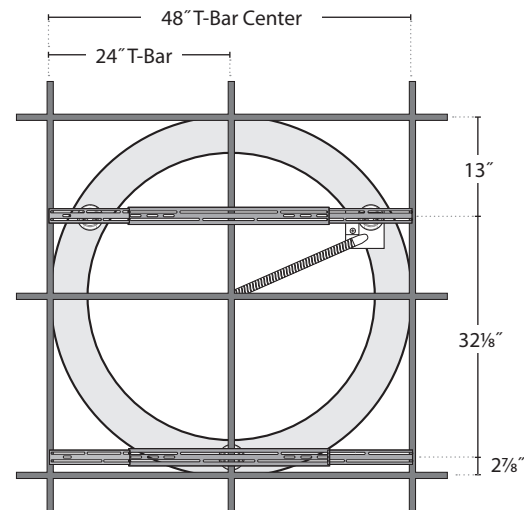

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.





INSTALLATION INSTRUCTIONS


PRULITE.COM 213.746.0360

X1 (T-BAR SURFACE)


FIXTURE PLANS

FIXTURE PLAN:


O20:




Top Parallel
Ceiling Plate




Angular Mounted Ceiling Plate



O30:

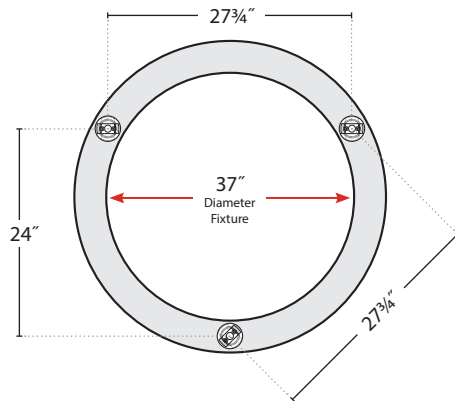

O40:

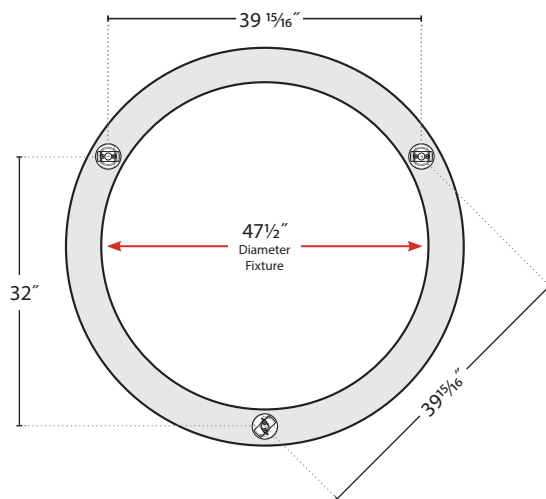

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.






INSTALLATION INSTRUCTIONS

PRULITE.COM 213.746.0360


X1 (T-BAR SURFACE)

MOUNTING BRACKET INSTALLATION



1. Install pre-drilled ceiling tiles onto t-bar in order shown on tile plan view.
2. Place brackets over drilled holes. Be sure bolts are mounted through first row of slots as (see detail A.) bolts on first row of slots.



DETAIL A.

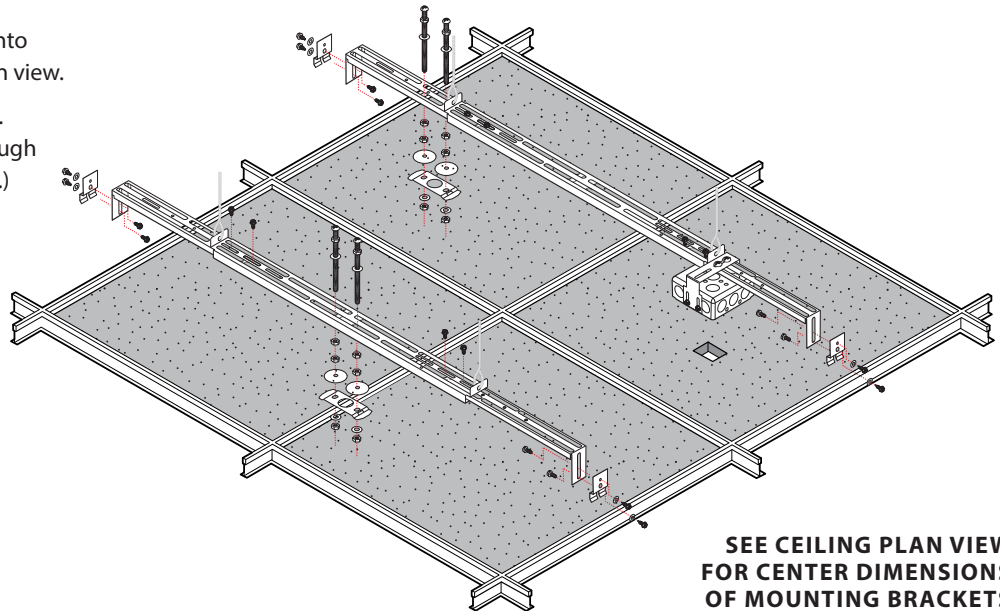

SEE CEILING PLAN VIEW
FOR CENTER DIMENSIONS
OF MOUNTING BRACKETS

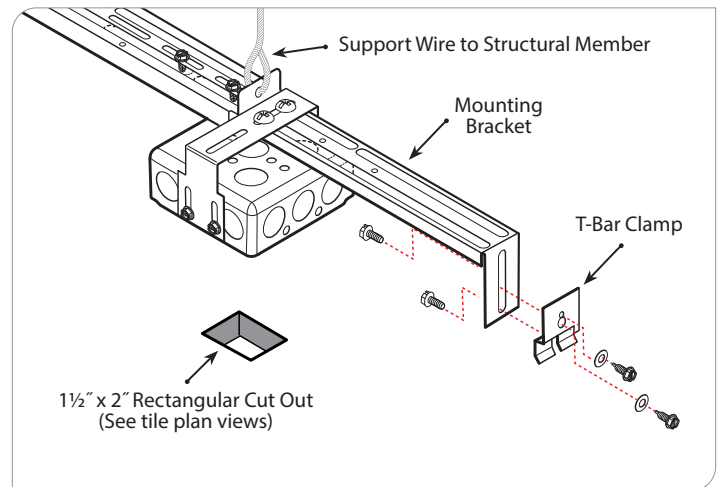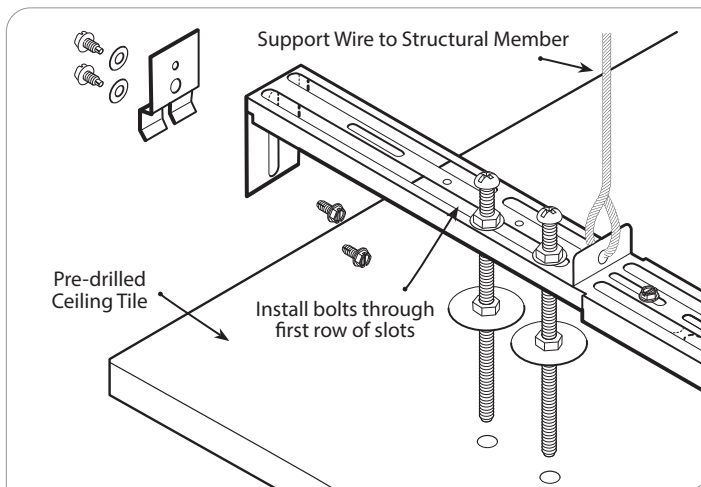

3. Align bolts with holes on ceiling tile.
4. Use 1/4-20 hex nut and fender washer as tile elevation stops
5. Align j-box ceiling plaster with 1 1/2" x 2" rectangular cut out.
6. Secure brackets to t-bar with clamps or self drilling tek screws.

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.






INSTALLATION INSTRUCTIONS

PRULITE.COM 213.746.0360


X1 (T-BAR SURFACE)

CEILING PLATES

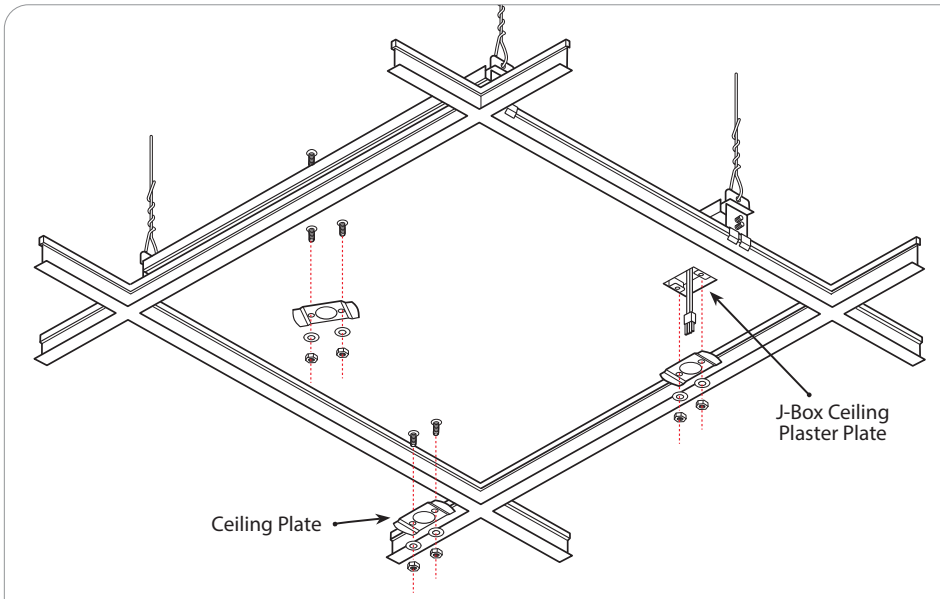


7. Attach ceiling plates to tile surface with $\frac{1}{4}$ -20 hex nut and $\frac{1}{4}$ washers.
8. Ceiling should be in position shown on fixture plan view.

FIXTURE MOUNTING

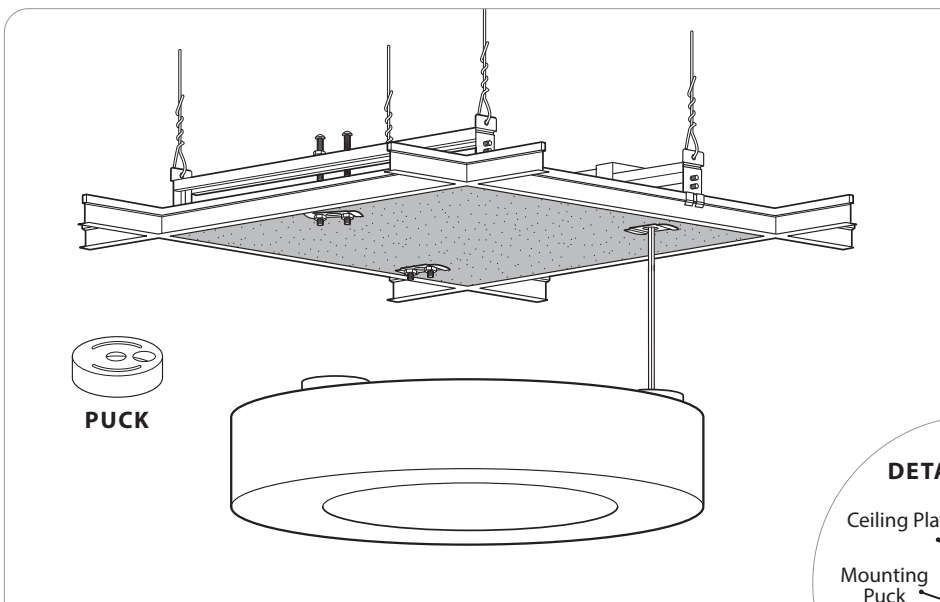

9. Make all wire connections.
10. Place fixture mounting pucks over ceiling plates.
11. Rotate pucks over ceiling plates (see detail B).



WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.






INSTALLATION INSTRUCTIONS

LED & DRIVER MAINTENANCE

PRULITE.COM 213.746.0360

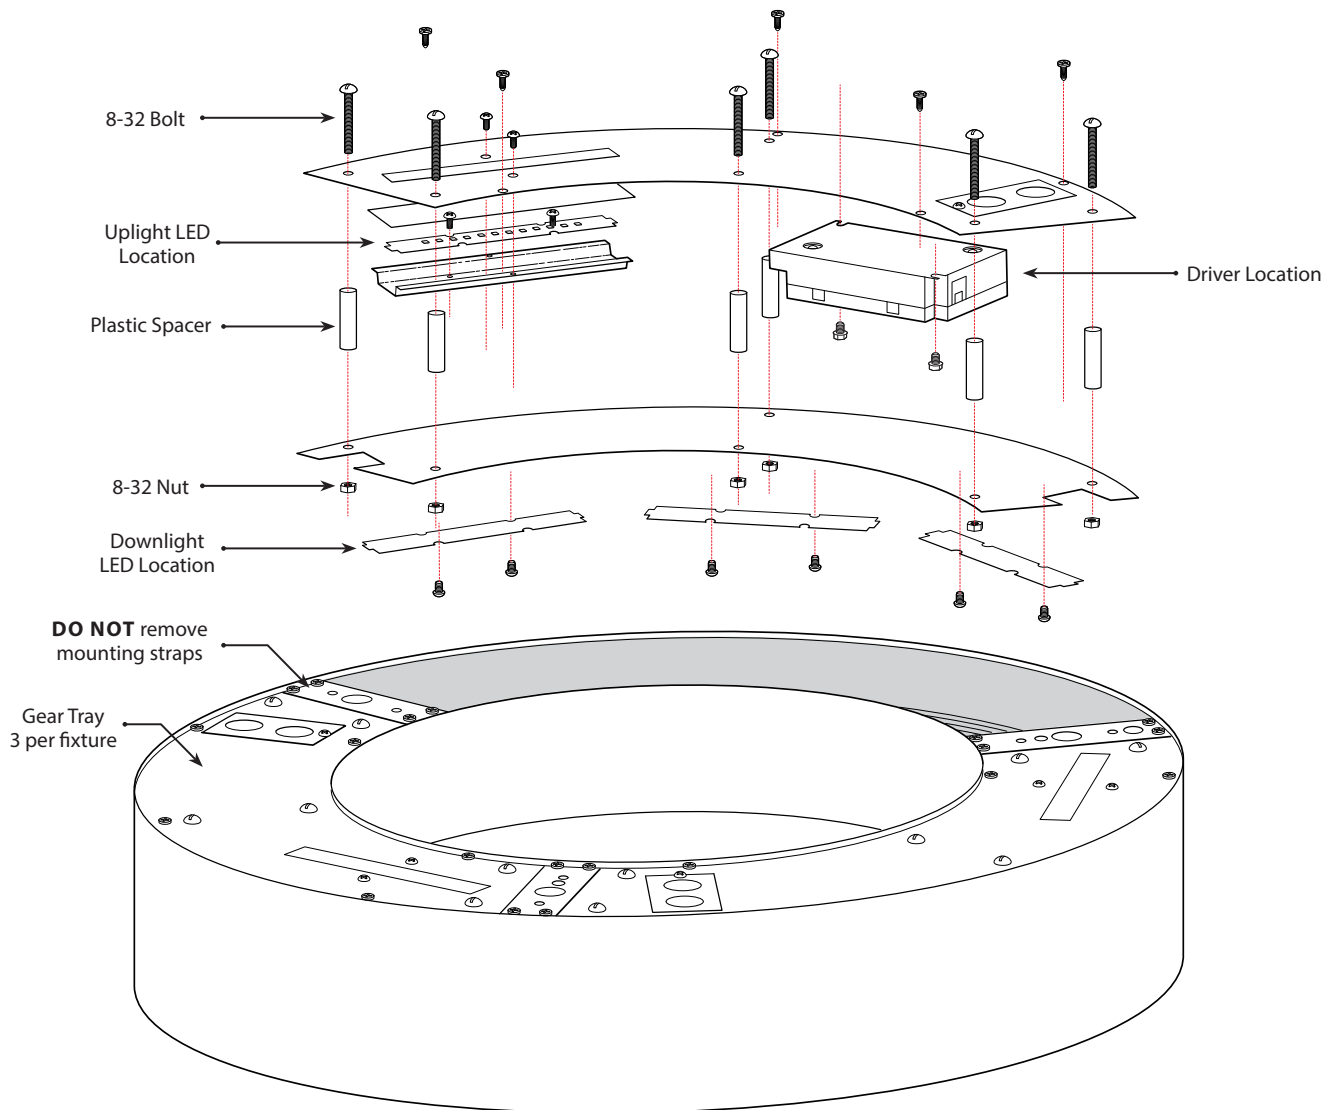

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.

