



IES INDOOR REPORT

PHOTOMETRIC FILENAME : P8624-LED35-MO-WA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L091503401
 [TESTLAB]
 [ISSUE DATE]
 [MANUFAC] PRUDENTIAL LTG.
 [LUMCAT] P8624-LED35-MO-WA
 [LUMINAIRE] 48"LX 24"W LED RECESSED 2X4, DIFFUSED LENS
 [BALLASTCAT] OSRAM OPTOTRONIC OT48W (2 DRIVERS)
 [LAMPPOSITION] 0,0
 [LAMPCAT] N/A
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5136
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	103
Total Luminaire Watts	50
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.24
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	3.92 ft
Luminous Width (90-270)	1.92 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2489	2456	2391
55	2361	2285	2215
65	2227	2095	2012
75	1891	1666	1558
85	1101	697	571

IES INDOOR REPORT
PHOTOMETRIC FILENAME : P8624-LED35-MO-WA.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0	1879.35	1879.35	1879.35	1879.35	1879.35
5	1866.60	1867.45	1869.15	1870.85	1871.70
10	1841.10	1841.10	1842.80	1843.65	1843.65
15	1798.60	1798.60	1799.45	1798.60	1798.60
20	1741.65	1741.65	1740.80	1738.25	1736.55
25	1667.70	1667.70	1666.00	1658.35	1654.95
30	1581.00	1581.00	1575.05	1564.85	1558.90
35	1477.30	1479.00	1470.50	1454.35	1445.00
40	1360.00	1360.00	1351.50	1328.55	1319.20
45	1231.65	1229.10	1215.50	1193.40	1183.20
50	1093.95	1088.85	1069.30	1050.60	1039.55
55	947.75	940.10	917.15	900.15	889.10
60	805.80	794.75	770.95	754.80	744.60
65	658.75	643.45	619.65	603.50	595.00
70	498.95	481.10	457.30	442.00	436.05
75	342.55	324.70	301.75	287.30	282.20
80	194.65	176.80	158.10	143.65	138.55
85	67.15	56.95	42.50	35.70	34.85
90	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : P8624-LED35-MO-WA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	685.23	N.A.	13.30
0-30	1451.7	N.A.	28.30
0-40	2368.23	N.A.	46.10
0-60	4125.82	N.A.	80.30
0-80	5066.37	N.A.	98.70
0-90	5135.59	N.A.	100.00
10-90	4958.00	N.A.	96.50
20-40	1683.00	N.A.	32.80
20-50	2617.07	N.A.	51.00
40-70	2372.09	N.A.	46.20
60-80	940.55	N.A.	18.30
70-80	326.05	N.A.	6.30
80-90	69.21	N.A.	1.30
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	5135.59	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	177.59
10-20	507.64
20-30	766.47
30-40	916.53
40-50	934.07
50-60	823.53
60-70	614.50
70-80	326.05
80-90	69.21
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : P8624-LED35-MO-WA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84
2	99	91	84	79	97	89	83	78	86	81	76	82	78	74	79	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	66	62	60
4	83	71	62	56	81	70	62	55	67	60	55	65	59	54	63	57	53	51
5	76	64	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44
6	71	57	48	42	69	56	48	42	54	47	41	53	46	41	51	45	41	39
7	65	52	43	37	64	51	43	37	50	42	37	48	41	36	47	41	36	34
8	61	47	39	33	59	47	39	33	45	38	33	44	37	33	43	37	32	30
9	57	44	35	30	55	43	35	30	42	35	30	41	34	29	40	34	29	27
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

POLAR GRAPH

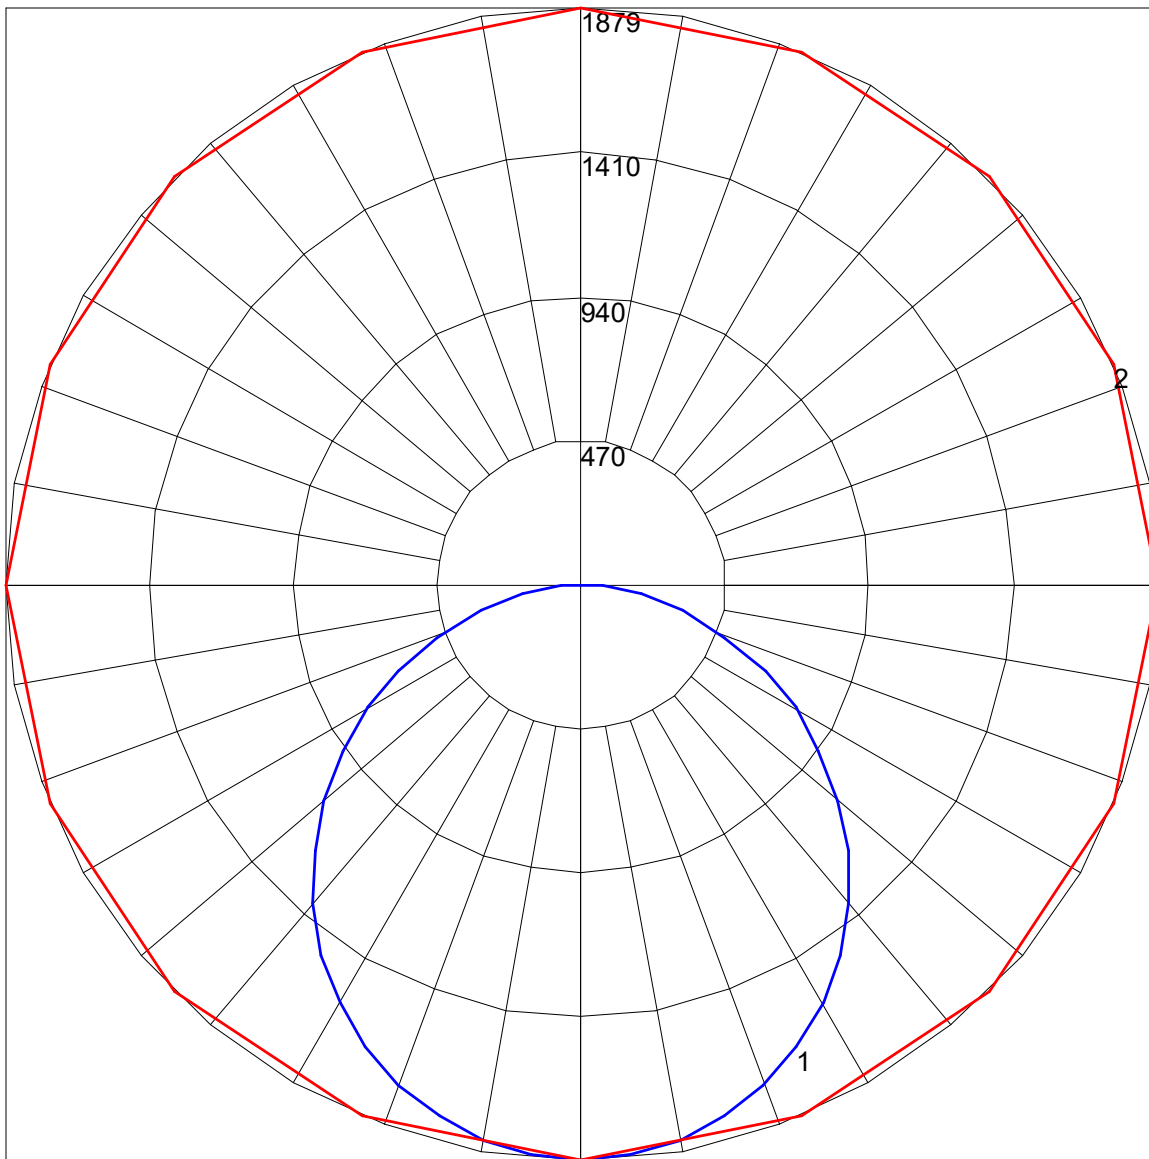

Maximum Candela = 1879.35 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)