


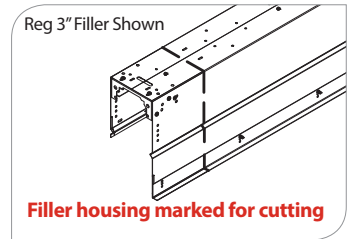





1. Determine FILLER location & measure length of filler needed (Mark cut line around housing):





2. Disassemble Filler Kit & Remove Reflector from previous row.

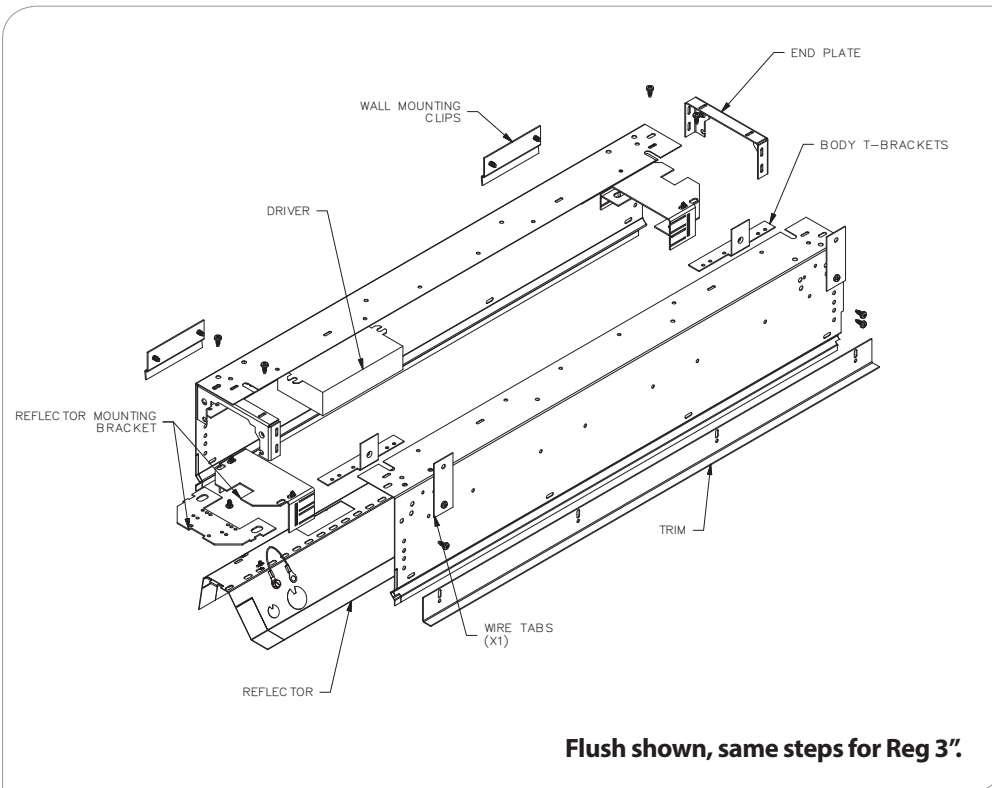





3. Measure Trim and Mark for Cutting

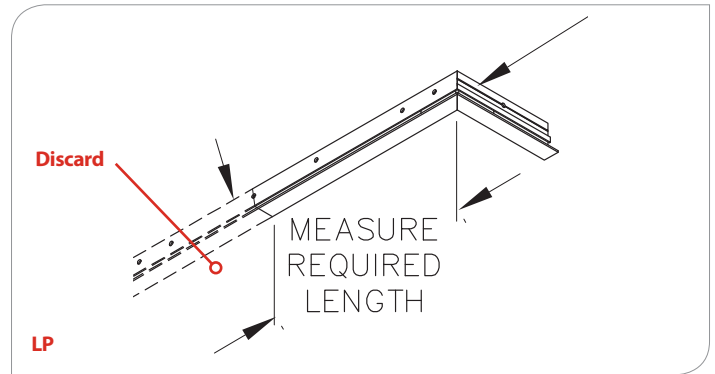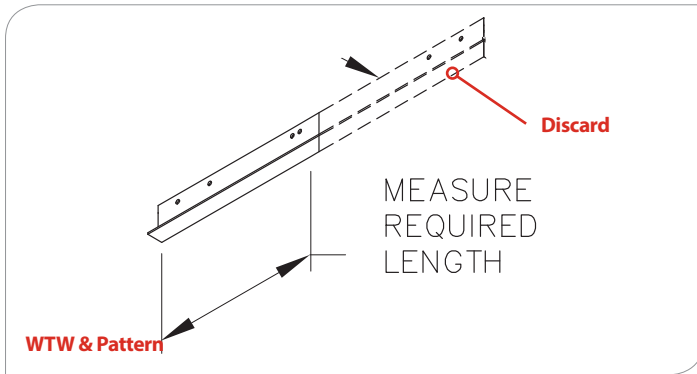

4. Cut and discard Filler Housing

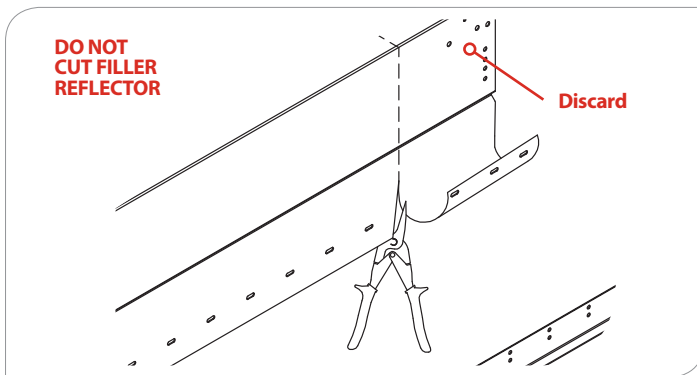

5. Assemble Filler Kit with Driver & Trim (Do Not install Reflector with LED arrays)

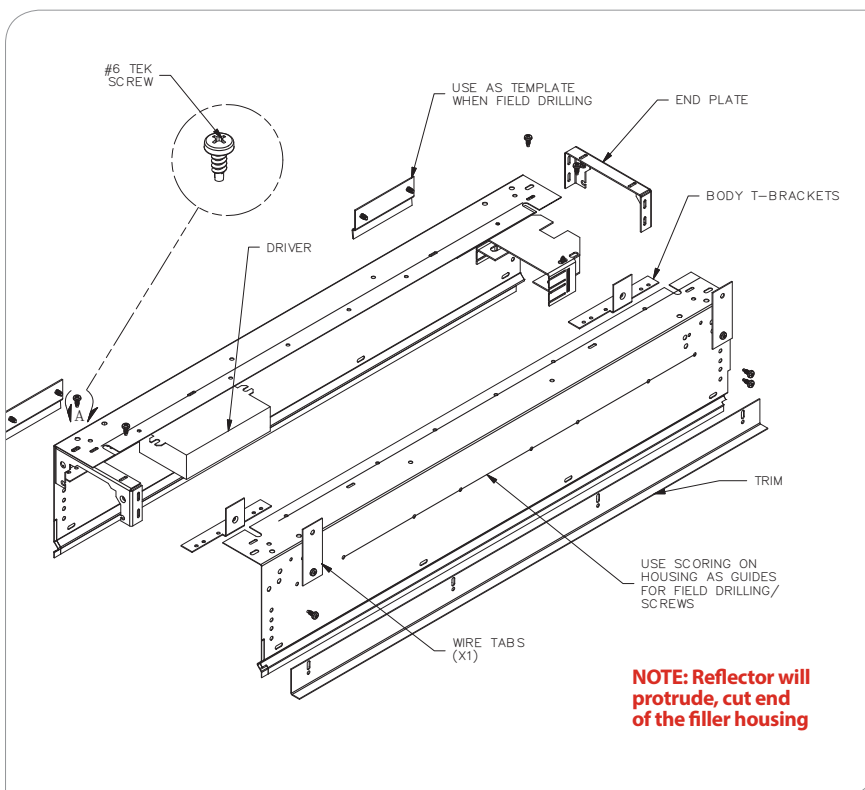


6. Install filler into ceiling & connect wiring






7. Install spacer on reflector in previous housing



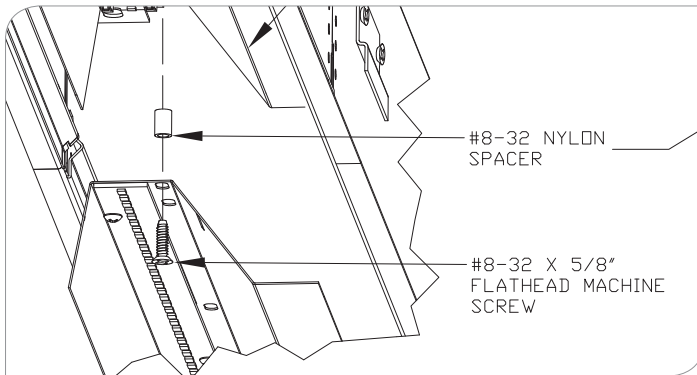


8. Install Filler Reflector 'above' previous Housing Reflector


Note: No trimming of reflector needed

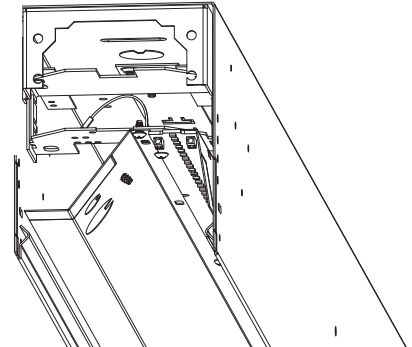

9. Slide Reflector Mounting Plate OUT and UP One Spot to secure Reflector to Previous Housing

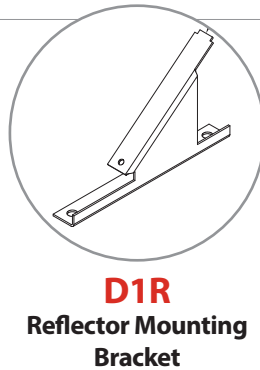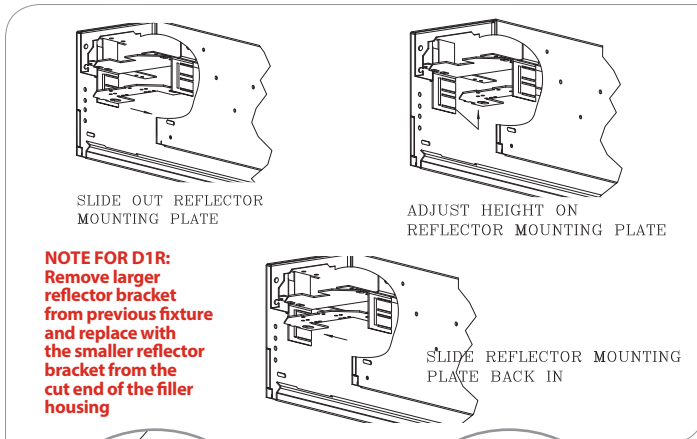

10. Screw Reflector into last Bracket of Previous Housing

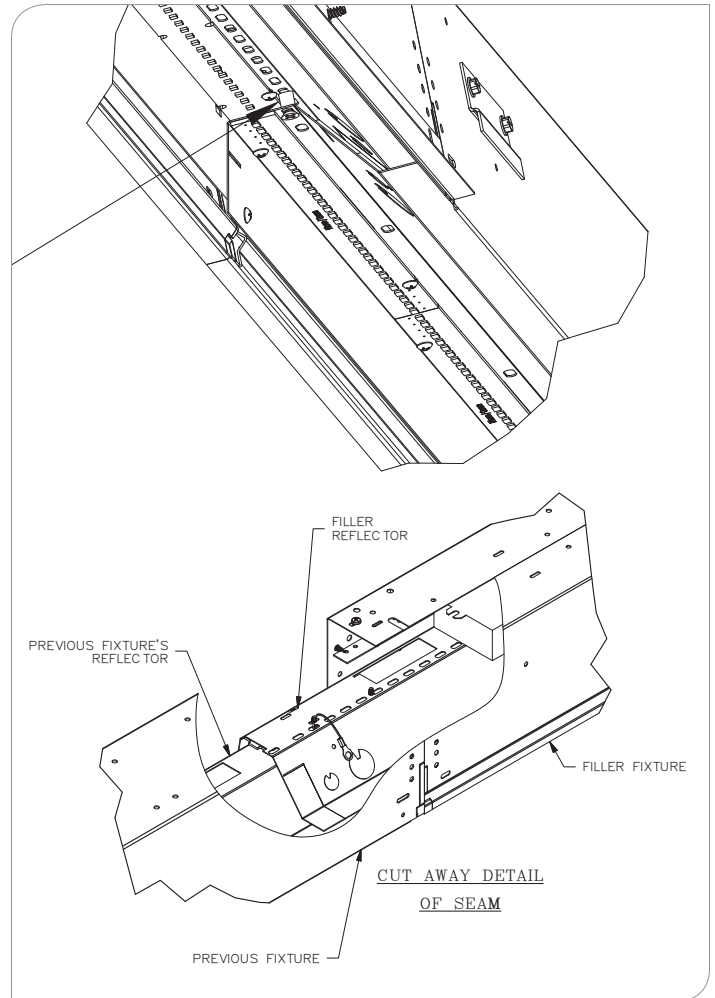

11. Complete wiring, install lens

