


A low-angle, upward-looking photograph of a diverse group of people holding hands in a circle. The individuals are looking up towards the sky, which is filled with bright, dappled sunlight filtering through green foliage. The people are wearing various casual clothing, including plaid shirts and sweaters. Many of their wrists are adorned with different types of bracelets and watches. The overall mood is one of unity, positivity, and connection.

boundless





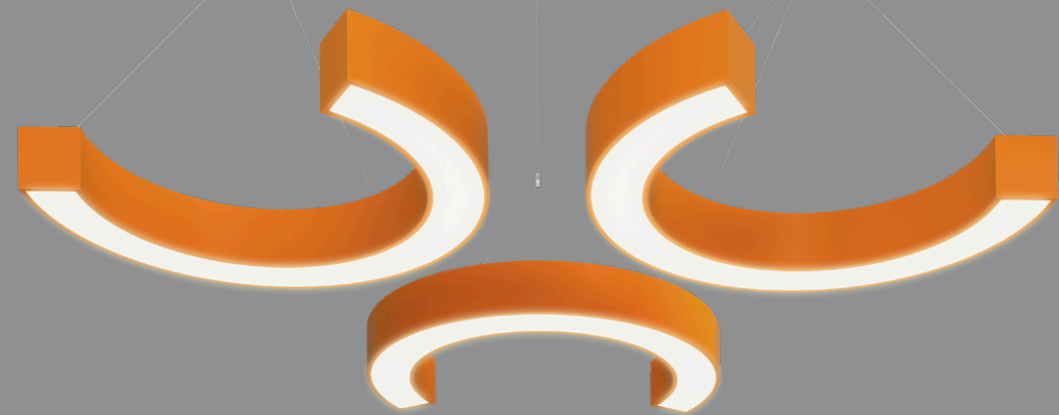

**IMAGINE IT. THEN INSTALL IT. WITH FOUR NEW DESIGNS,  
SIX MORE COLORS AND A MASSIVE 5' ROUND.**


Our original line was a smash hit with designers and architects, so we've doubled our offering – giving you more possibilities than ever. We've applied a sleek, seamless European aesthetic to the entire collection. And now, circles and squares are limited only by the boundaries of your imagination – which leaves a whole lot of room for trying something completely new.





SKY OCULUS SERIES | Let the mixing and matching begin.


- The entire Sky Oculus series utilizes a uniform extruded aluminum housing:
- Sleek and seamless Euro-styled body and lens
  - 5" height and sharp .5" trim detail
  - 4" aperture lens for O, C and Quad Frame
  - All with seamless and evenly lit flat white acrylic lenses and independent uplight

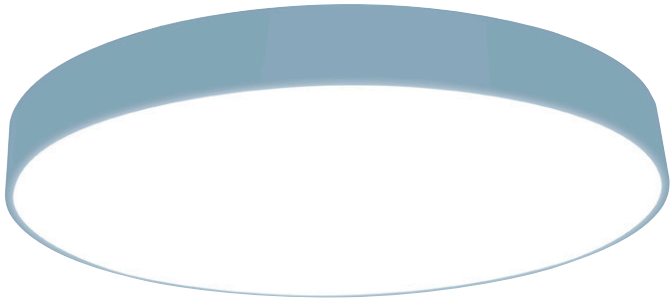

P4000 SKY

"Like you lassoed some daylight and brought it inside"


- 18", 2', 3' and 4' diameters
- Semi-recessed option (Hard ceilings and **NOW T-BAR**)

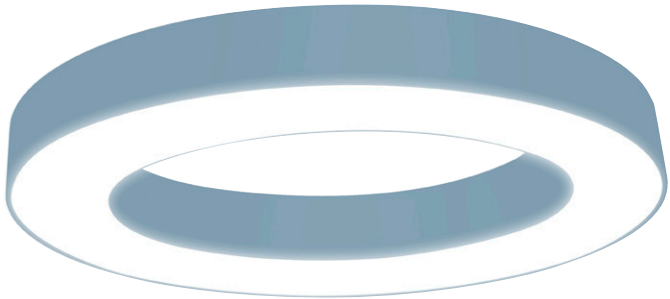

O

"There's a reason WOW has an O in it"


- 2', 3' and 4' diameters
- Decorative but powerful enough to light space

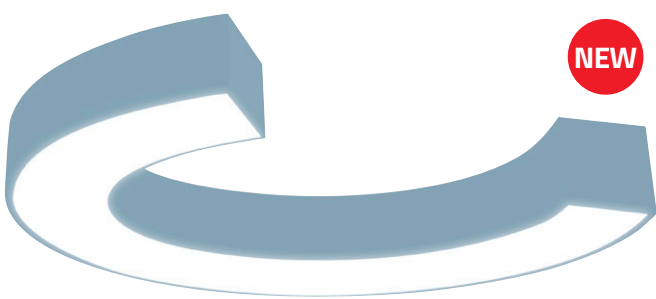

C

"The not-quite-a-circle shape, just for kicks"


- 2', 3' and 4' diameters

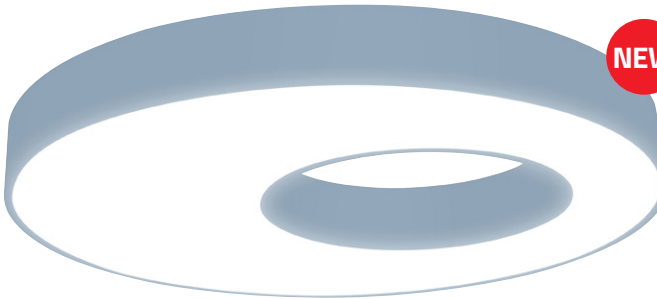

OLIVE

"For fans of the asymmetrical"

- 3' and 4' diameters

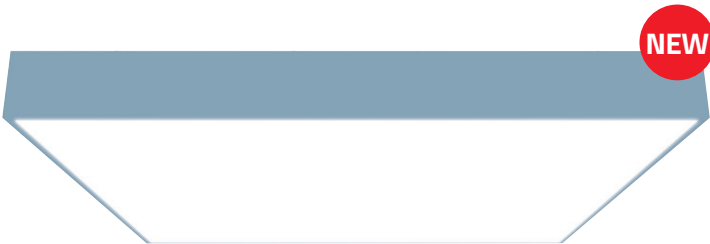

QUAD

"Pretty much the P4000 SKY, but square"

- 2', 3' and 4' squares, 1' x 4', 2' x 4'




QUAD FRAME

"Prefabricated patterns"

- 2', 3' and 4' squares
- Decorative but powerful enough to light space

Our original big rounds, introduced in 1971 — now available as a 5' pendant.

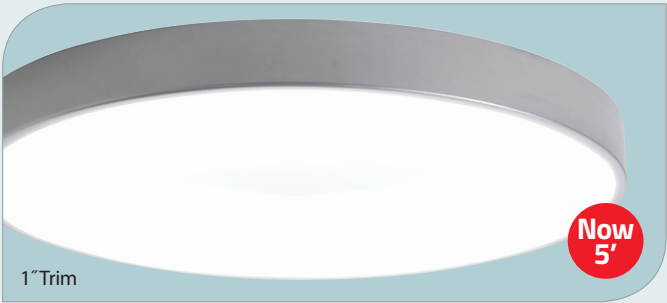

P3900

- 18", 2', 3', 4' and **NOW 5'** diameters
- Hand-spun steel housing
- Independent uplight
- Convex or flat, white acrylic lens



P8900

- 12", 2', 3', 4', 5', 6' diameters
- T-bar or hard ceilings
- Concave, convex or flat, white acrylic lens





## SKY OCULUS SERIES | No detail left unconsidered.

While unique in silhouette, all six extruded aluminum Sky Oculus fixtures have identical height (5") and trim (.5"), making it easy to mix and match at will, while maintaining a cohesive look. Smooth, continuous housings and lenses give you a seamless, streamlined aesthetic.







**OLIVE** | The pendant that's not afraid to be playful.

More than just a series of great-looking fixtures, our decorative pendants are highly efficient luminaries (often exceeding 100 lumens/watt), excellent for general illumination with optional independent uplight.





CLIENT | Bellhops, Knoxville, TN

SEMI-RECESSED | Bring on the drama by breaking the plane.

**Wanting to make a signature statement?**

Our playful P4000 Sky's shine like the stars they are in either hard or T-bar ceilings, and can be tilted up to 15° for a touch of whimsy. Or install them semi-recessed at various heights – they're easily adjustable after installation.

NOW AVAILABLE FOR BOTH  
HARD OR T-BAR CEILINGS








P9000 SKY | Nearly disappears into its environment  
 CLIENT | Guarantee Trust, Glenview, IL — ARCHITECT | TZS Design



P8900 | Up to 6' diameter  
 CLIENT | Pacific Design Center, Beverly Hills, CA

## ALMOST INVISIBLE | Create an overhead glow with P9000 & P8900 'Sky Lights'.

Give your space the subtle warmth of natural light emanating from the architecture. Our P9000 Sky virtually melts into its environment with a minimal trim or invisible trimless flange for hard ceilings — plus our P8900 is available up to 6' diameters.

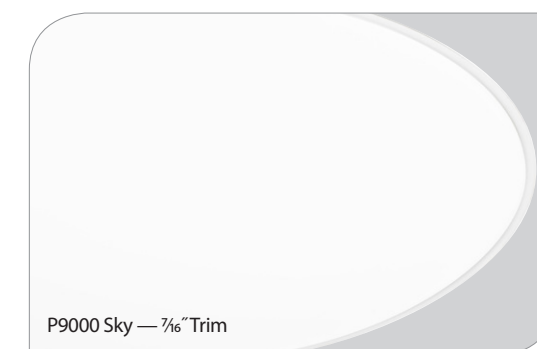

P9000 Sky — 7/8" Trim



P8900 — 2" Trim







0 | Eye-catching, yet oh so elegant.

CLIENT | Paciolan Offices, Irvine CA

ARCHITECT | H. Hendy Associates, Newport Beach CA





CLIENT | BitTitan, Seattle, WI ARCHITECT | JPC Architects



Make a splash with a two-tone O!

## COLOR | Fast lead times and no set-up fees.

Our in-house powder coating allows us to offer a broad array of colors with remarkably speedy lead times. Don't see the color you want? Specify an RAL color instead. Looking to make a splash? Go all out and specify the inner and outer rings of our O, Olive or Quad Frame in different colors for a playful look.

## PREMIUM COLORS | New Matte Finishes...

YSW – Seashell White (Matte)	YCH – Champagne (Metallic)	YSL – Silver (Metallic)
YPE – Pewter (Matte)	YRG – Rain Grey (Gloss)	YSTM – Storm Grey (Matte)
YBK – Interior Black (Matte)	YBB – Black (Semi-Gloss)	YSKM – Sky (Matte)
YMB – Military Blue (Matte)	YIB – Interstate Blue (Matte)	YSAM – Sapphire (Matte)
YFGM – Forest Green (Matte)	YBR – Bronze (Matte)	YBY – Boysenberry (Matte)
YSRM – Sunset Red (Matte)	YOR – Orange (Matte)	YDAM – Daffodil (Matte)

Please note that as of May 1<sup>st</sup>, 2017 the following colors have been changed to matte finishes; YSTM, YSKM, YFGM, YSRM, YDAM. To match a previous order with a glossy finish please remove the 'M', e.g. 'YST' instead of 'YSTM'.

For paint chip samples, please email: [info@prulite.com](mailto:info@prulite.com)

prulite.com / 17 /









P4000 SKY



SE-RIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
P4018 18" Dia. (11 lbs) P4020 2" Dia. (22 lbs) P4030 3" Dia. (35 lbs) P4040 4" Dia. (50 lbs)	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High  PROG Program-mable Light Output (Specify desired lm or w/ fixture)  <b>NOTES:</b> Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output  <i>P4018:</i> NA-LO or MO; Uplight unless Downlight is same output level	FWA Flat White Acrylic Lens (Standard)  VWA Convex White Acrylic Lens (1" Max drop)	TMW Textured Matte White (Standard)  YGW Gloss White  Y___ Premium Color  CC Custom Color  <b>NOTES:</b> Top plate is always Gloss White for optical performance. All canopies are painted the same color as the fixture. Consult factory to specify	D1 Direct  D9 Semi-Direct (20-30% uplight, NA - Surface) To specify more or less Uplight, see Output.  <b>NOTE:</b> NA - 18", 2" D9 DC LO  <b>NOTE:</b> 18" minimum from fixture to ceiling recommended	SC Single Circuit  DC Dual Circuit (Two feeds required, D9 only)	UNV (120-277)  347 (Emergency battery requires a Step Down transformer)	SUR Surface Mount  CA48", 96" or 144" Aircraft Cable (Adjustable)  3/4RPM48", 96" or 144" Round Cast Aluminum Canopy (3RPM: Min from fixture to ceiling 18"; 6", 2"; 6" / 4RPM: 3"; 10", 4"; 15"; 5"; 24")  3/4SPM48", 96" or 144" Square Cast Aluminum Canopy (3SPM: Min from fixture to ceiling 18"; 6", 2"; 6" / 4SPM: 3"; 10", 4"; 15"; 5"; 24")  MPCA48", 96" or 144" Monopoint Mounting (For 18" & 2' - 9" min. from fixt. to ceiling, for 3' & 4' fixt. 18" from fixt. to ceiling. NA P4040)  SSC___ Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches)  <b>NOTE:</b> P4018 SUR or MPCA only	X1 T-Bar <sup>15</sup> / <sub>16</sub> " or <sup>9</sup> / <sub>16</sub> " Exposed (Standard) Consult factory for <sup>9</sup> / <sub>16</sub> " Tegular  X3 Hard Ceiling  X6 Slot Grid or Interlude	ND Non-Dimming, Osram DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram <b>NOTE:</b> Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EML Emergency Battery, Low (P4018: 400, Remote only; P4020: 500; P4030-40: 900 delivered lumens)  EMH Emergency Battery, High (P4018-20: 400, Remote only; P4030-40: 1250 delivered lumens)  IBC Insulated Braided Cord  PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse

SIZES



OLIVE



SE-RIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
OLV-30 3" Dia. OLV-40 4" Dia.	LED3 3000K LED35 3500K LED4 4000K	LO Low MO Medium SO Standard HO High  PROG Program-mable Light Output (Specify desired lm or w/ fixture)  <b>NOTES:</b> Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output  <i>OLV-30:</i> NA LO or MO Uplight unless Downlight is same output level	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard)  YGW Gloss White  Y___ Premium Color  CC Custom Color  <b>NOTE:</b> All canopies are painted the same color as the fixture. Consult factory to specify	D1 Direct Solid Top <b>NOTE:</b> Only 1 row of LEDs D9 Semi-Direct <b>NOTE:</b> Only 1 row of LEDs, 17% Up, 83% Down. To specify more or less Uplight, see Output.	SC Single Circuit  DC Dual Circuit (D9 only)	SC Single Circuit  DC Dual Circuit (Two feeds required, D9 only)	SUR Surface Mount (1" Standoff from ceiling)  3RPM48", 96" or 144" Round Cast Alumi-num Canopy (Min from fixture to ceiling 3': 16", 4"; 20")  3SPM48", 96" or 144" Square Cast Alumi-num Canopy (Min from fixture to ceiling 3': 16", 4"; 20")  MPCA48", 96" or 144" Monopoint Mounting (18" min from fixture to ceiling) <b>NOTE:</b> Fixture may spin with air movement  CA48", 96" or 144" Aircraft Cable (Adjustable)  SSC___ Top-Swivel Stem Mount (Specify length)	X1 T-Bar <sup>15</sup> / <sub>16</sub> " or <sup>9</sup> / <sub>16</sub> " Exposed (Standard) Consult factory for <sup>9</sup> / <sub>16</sub> " Tegular  X3 Hard Ceiling  X6 Slot Grid or Interlude	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram <b>NOTE:</b> Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE Emergency Battery (500 delivered lumens) — CA compliant — Remote only — Remote (RTK) test kit included  IBC Insu-lated Braided Cord  PRUBIN Meticulous Binning and Labeling every LED Board with-in a 2-Step MacAdams Ellipse

SIZES



O




SE-RIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
O-20 2" Dia. O-30 3" Dia. O-40 4" Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High  PROG Program-mable Light Output (Specify desired lm or w/fixture)  <b>NOTES:</b> Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output  <b>O-20:</b> NA LO or MO Uplight unless Downlight is same output level	FWA Flat White Acrylic Lens	TMW Textured Matte White  YGW Gloss White (Standard)  Y___ Premium Color  CC Custom Color  <b>NOTE:</b> All canopies are painted the same color as the fixture. Consult factory to specify	D1 Direct Solid Top <b>NOTE:</b> Only 1 row of LEDs D9 Semi-Direct <b>NOTE:</b> ~17% Uplight, 83% Down. To specify more or less Uplight, see Output  <b>NOTE:</b> Rec-ommended distance to hang from ceiling to top of fixture to avoid hotspots: O-20: 18"; O-30: 24"; O-40: 30"	SC Single Circuit  DC Dual Circuit (D9 only)	UNV (120-277)  347 (Emer-gency battery requires a Step Down trans-former)	SUR Surface Mount (1" Standoff from ceiling)  CA48", 96" or 144" Aircraft Cable (Adjustable)  3RPM48", 96" or 144" Round Cast Aluminum Canopy (Min from fixture to ceiling 2': 10", 3': 16", 4"; 20")  3SPM48", 96" or 144" Square Cast Aluminum Canopy (Min from fixture to ceiling 2': 10", 3': 16", 4"; 20")  MPCA48", 96" or 144" Monopoint Mounting (18" min from fixture to ceiling)  SSC___ Top-Swivel Stem Mount (Specify length)	X1 T-Bar <sup>15</sup> / <sub>16</sub> " or <sup>9</sup> / <sub>16</sub> " Exposed (Standard) Consult factory for <sup>9</sup> / <sub>16</sub> " Tegular  X3 Hard Ceiling  X6 Slot Grid or Interlude	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram <b>NOTE:</b> Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EML Emer-gency Battery, Low (400 delivered lumens, 2' - remote only)  EMH Emer-gency Battery, High (550 delivered lumens, Remote only for all sizes)  IBC Insulated Braided Cord  PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse

SIZES



C

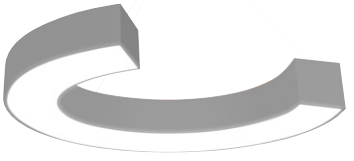

SE-RIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
C-20 2" Dia. C-30 3" Dia. C-40 4" Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High  PROG Program-mable Light Output (Specify desired lm or w/fixture)  <b>NOTES:</b> Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output  C-20: NA LO or MO Uplight unless Downlight is same output level	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard)  YGW Gloss White  Y___ Premi-um Color  CC Custom Color  <b>NOTE:</b> All canopies are painted the same color as the fixture. Consult factory to specify	D1 Direct Solid Top <b>NOTE:</b> Only 1 row of LEDs D9 Semi-Direct <b>NOTE:</b> Only 1 row of LEDs, 17% Up, 83% Down	SC Single Circuit  DC Dual Circuit (Two feeds required, D9 only)	UNV (120-277)  347 (Emergen-cy battery requires a Step Down transform-er)	SUR Surface Mount (1" Standoff from ceiling)  CA48", 96" or 144" Aircraft Cable (Adjustable)  3RPM48", 96" or 144" Round Cast Aluminum Canopy (Min from fixture to ceiling 2': 10", 3': 16", 4"; 20")  3SPM48", 96" or 144" Square Cast Alumi-num Canopy (Min from fixture to ceiling 2': 10", 3': 16", 4"; 20")  MPCA48", 96" or 144" Monopoint Mounting (18" min from fixture to ceiling)  <b>NOTE:</b> Fixture may spin with air movement  SSC___ Top-Swivel Stem Mount (Specify length)	X1 T-Bar X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram <b>NOTE:</b> Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EML* Emer-gency Battery, Low (400 delivered lumens, available in 4' only, unless remote)  EMH* Emer-gency Battery, High (550 delivered lumens)  IBC Insulated Braided Cord  PRUBIN Metic-ulous Binning and Labeling every LED Board within a 2-Step MacAd-ams Ellipse  *SUR -remote mount only, within 30" of fixture

SIZES






QUAD

SERIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
QD-14 1" x 4"	LED27 2700K (90CRI)	LO Low	FWA White Acrylic Lens (Flat)	TMW Tex- tured Matte White (Standard)	D1 Direct Solid Top	SC Single Circuit	UNV (120- 277)	SUR Surface Mount (1" Standoff from ceiling)	X1 T-Bar 1 <sup>5</sup> / <sub>16</sub> " or <sup>9</sup> / <sub>16</sub> " Exposed (Standard) Consult factory for % Tegular	ND Non-Dimming DM10 0-10v,10% Dimming (Standard) DM01 0-10v, 1% Dimming	EML* Emergency Battery, Low (400 delivered lumens)
QD-22 2" x 2"	LED3 3000K	SO Standard		YGW Gloss White	NOTE: Only 1 row of LEDs	DC Dual Circuit (Two feeds required, D9 only)	347 (Emer- gency battery requires a Step Down trans- former)	4SPM48", 96" or 144 Square Cast Aluminum Canopy (Min from fixture to ceiling 14: 24", 22: 14", 24: 24", 33: 22", 44: 30")	X3 Hard Ceiling	STEP Step Dimming, 100-50-Off, Osram	EMH* Emergency Battery, High (550 delivered lumens)
QD-24 2" x 4"	LED35 3500K	HO High		Y____ Premi- um Color	D9 Semi- Direct			4RPM48", 96" or 144 Round Cast Aluminum Canopy (Min from fixture to ceiling 14: 24", 22: 14", 24: 24", 33: 22", 44: 30")	X6 Slot Grid or Interlude	NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory	*SUR - remote mount only, within 30" of fixture
QD-33 3" x 3"	LED4 4000K	PROG Program- mable Light Output (Specify desired lm or w/fixture)		CC Custom Color	NOTE: Only 1 row of LEDs, 17% Up, 83% Down. To specify more or less Up- light, see Output.			CA48", 96" or 144" Aircraft Cable (Adjustable)		LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only)	IBC Insulated Braided Cord
QD-44 4" x 4"	LED3- 90 90CRI LED35- 90 90CRI LED4- 90 90CRI	NOTES: Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output QD-14:: NA LO or MO Uplight unless Down- light is same output level		NOTE: All canopies are painted the same color as the fixture. Consult factory to specify				SSC__ Top-Swivel Stem Mount (Specify length)		ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	PRUBIN Meticulous Binning and La- beling every LED Board within a 2-Step MacAd- ams Ellipse

SIZES



QUAD FRAME

SERIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
QDF-22 2" x 2"	LED27 2700K (90CRI)	LO Low	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard)	D1 Direct Solid Top	SC Single Circuit	UNV (120-277)	SUR Surface Mount (1" Standoff from ceiling)	X1 T-Bar 1 <sup>5</sup> / <sub>16</sub> " or <sup>9</sup> / <sub>16</sub> " Exposed (Standard) Consult factory for <sup>9</sup> / <sub>16</sub> " Tegular	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram	EML* Emergen- cy Battery, Low (400 delivered lumens)
QDF-33 3" x 3"	LED3 3000K	MO Medium		YGW Gloss White	D9 Semi-Direct	DC Dual Circuit (Two feeds required, D9 only)	347 (Emer- gency battery requires a Step Down trans- former)	4SPM48", 96" or 144" Square Cast Alumi- num Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30")	X3 Hard Ceiling	NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory	EMH* Emergency Battery, High (550 delivered lumens)
QDF-44 4" x 4" (60 lbs)	LED35 3500K LED4 4000K	HO High		Y____ Premi- um Color	NOTE: Only 1 row of LEDs, 17% Up, 83% Down	NOTE: To spec- ify more or less Uplight, see Output.		4RPM48", 96" or 144" Round Cast Alumi- num Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30")	X6 Slot Grid or Interlude	LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	*SUR -remote mount only, within 30' of fixture IBC Insulated Braided Cord PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse
	LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	PROG Programma- ble Light Output (Specify desired lm or w/fixture) NOTES: Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output QDF-22:: NA LO or MO Uplight unless Down- light is same output level		CC Custom Color NOTE: All canopies are painted the same color as the fixture. Consult factory to specify				MPCA48", 96" or 144" Monopoint Mounting (Adj- 36" min from fixture to ceiling) NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable) SSC__ Top-Swivel Stem Mount (Specify length)			

SIZES



P9000 SKY & P8900

SERIES	LED COLOR	OUTPUT	SHIELDING	TRIM COLOR	CIRCUITING	VOLT-AGE	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
P9012 12" Dia.	LED27 2700K (90CRI)	LO Low	P9000:	TMW Textured Matte White (Standard)	SC Single Circuit	UNV (120-277)	X1 T-Bar Exposed	ND Non-Dimming	EML Emergency Battery, Low (NA* - 12"; 18"; P9020: 500; P9030 & P9040: 900 delivered lumens)
P9018 18" Dia.	LED3 3000K	MO Medium	FWA Flush-Flat White Acrylic Lens (Standard)	YGW Gloss White		347 (Emer- gency battery requires a Step Down trans- former)	X3 Hard Ceiling (Flange Trim)	DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming	EMH Emergency Battery, High (NA* - 12"; 18" & 2"; P9030 & P9040: 1250 delivered lumens) *Remote Only
P9020 2" Dia.	LED35 3500K	SO Standard	DWA Drop White Acrylic Lens (Flat lens dropped 1" below ceiling plane)	Y____ Premium Color	PROG Program- mable Light Output (Specify desired lumens or watts per fixture)		X7 Hard Ceiling (Trimless Mud-over Flange)	STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	CP Chicago Plenum
P9030 3" Dia.	LED4 4000K	HO High		CC Custom Color					
P9040 4" Dia.	LED3-90 90CRI		P8900:						
P8912 12" Dia.	LED35- 90 90CRI		CWA Concave White Acrylic (NA - 12" & 2")						
P8920 2" Dia.	LED4-90 90CRI		VWA Convex White Acrylic						
P8930 3" Dia.			FWA Flat White Acrylic (NA - 6")						
P8940 4" Dia.									
P8950 5" Dia.									
P8960 6" Dia.									

SIZES



P3900

SE-RIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI-BUTION	CIRCUIT-ING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
P3918 18" Dia.	LED27 2700K (90CRI)	LO Low	FWA Flat White Acrylic Lens	TMW Tex- tured Matte White	D1 Direct	SC Single Circuit	UNV (120- 277)	SUR Surface Mount (P3950 T-bar consult factory)	X1 T-Bar Exposed	ND Non-Dimming	EML Emergency Battery, Low (P3918: 400, Remote only; P3920: 500; P3930-40-50: 900 delivered lumens)
P3920 2" Dia.	LED3 3000K	MO Medium	VWA Convex White Acrylic Lens (1" Max Drop)	YGW Gloss White (Standard)	D9 Semi- Direct (20-30% uplight, NA Surface)	DC Dual Circuit (Two feeds required, D9 only)	347 (Emer- gency battery requires a Step Down trans- former)	3/4RPM48", 96" or 144" Round Cast Aluminum Canopy (3RPM: Min from fixture to ceiling 18"; 6", 2"; 6" / 4RPM: 3"; 10", 4"; 15", 5"; 24")	X3 Hard Ceiling	DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMH Emergency Battery, High (P3918-20: 400, Remote only; P3930-40-50: 1250 delivered lumens)
P3930 3" Dia.	LED35 3500K	SO Standard		Y____ Premi- um Color				3/4SPM48", 96" or 144" Square Cast Aluminum Canopy (3SPM: Min from fixture to ceiling 18"; 6", 2"; 6" / 4SPM: 3"; 10", 4"; 15", 5"; 24")	X6 Slot Grid		EMH Emergency Battery, High (P3918-20: 400, Remote only; P3930-40-50: 1250 delivered lumens)
P3940 4" Dia.	LED4 4000K	HO High		CC Custom Color				MPCA Monopoint Mounting (For 18" & 2" - 9" min. from fixt. to ceiling, for 3' & 4' fixt. 18" from fixt. to ceiling. NA P3940-50)			IBC Insulated Braided Cord
P3950 5" Dia.	LED3- 90 90CRI LED35- 90 90CRI LED4- 90 90CRI	PROG Program- mable Light Output (Specify de- sired lm or w/ fixture) NOTE: Spec- ify separate output Down/Up if desired e.g. HO/LO (D9 only)		NOTES: Top plate is always Gloss White for optical performance All canopies are painted the same color as the fixture unless specified otherwise				CA48", 96" or 144" Aircraft Cable (Adjustable, NA P3950) SSC__ Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches, NA P3950)			PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse

SIZES







**CLIENT** | Avison Young Offices, Dallas Texas

**ARCHITECT** | Perkins + Will, Seattle, WA

Products  
Made in America **US★**



**PRUDENTIAL LTG.**

LA made. Nationally admired. Since 1955.

1774 East 21<sup>st</sup> Street  
Los Angeles, CA 90058

352 7<sup>th</sup> Avenue, 12th Floor  
New York, NY 10001

**TEL** 213.746.0360  
**FAX** 213.741.8590

**URL** prulite.com  
**EMAIL** info@prulite.com