


# Wal14 | Wall Mount



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

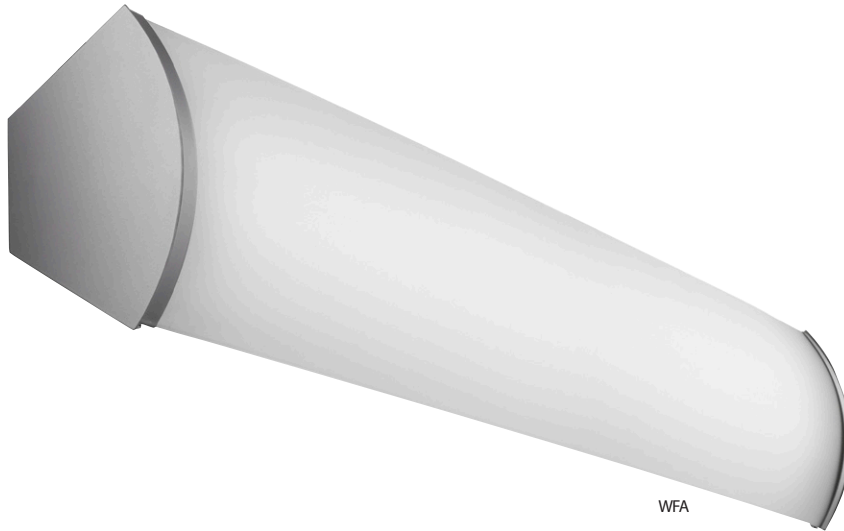


Type:

Job:



Perforated with OCO



## Perfect for hallways and stairwells.

An architectural wall fixture, open to wash light above and below. Frost acrylic fascias offer a warm, modern feel and integrated occupancy sensors help meet stringent energy codes.

**WAL14-WFA-2T8-04-TMW**  
 2950 Lamp Lumens  
 56 Input Watts

**90%**  
 EFFICIENCY


SERIES	BODY STYLE	LAMP ROWS	NOMINAL LENGTH	COLOR / FINISH*	CIRCUITING	VOLTAGE	MOUNTING	OPTIONS
WAL14	WFA White Frost Acrylic P Perforated SD Solid	1T8 2T8 1T5/HO 2T5/HO	2' 3' 4' 6' 8' R____ (Row length)	TMW Textured Matte White YGW Gloss White Y__ Premium Color CC Custom Color  *For WFA and BFA specify paint color for endplate and bezel only	SC Single Circuit DC Double Circuit (2-Lamp only)	120 277 347 UNV (120-277)	WM Direct to Wall (Standard) SUR* Surface Mount VWM* Vertical Wall Mount  *Kicker reflector is not supplied	EML* Emergency Battery, Low (600-700 delivered lumens) EMH* Emergency Battery, High (1100-1400 delivered lumens) DM Dimming (Specify manufacturer, voltage and other requirements) RSE** Rapid-Start Electronic 10THD** Ballast with <10% Total Harmonic Distortion B__ Specific Ballast (Specify manufacturer and catalog number)  FH Fixture Fusing (Slow blow) OCO* S-Occ™ Integrated Occupancy System - All Lamps On/Off OC2C* S-Occ™ - One Lamp Sensored, One Lamp on Constantly (2-Lamp only) OCDM* S-Occ™ - Dim to Standby Mode  *Consult factory for fixture lengths < 4' **T8 only



## PHOTOMETRICS

### WAL14-WFA-2T8-04-TMW

Report #LLI110902A  
 D=40.4% I=59.6%  
 2950 Lamp Lumens  
 56.3 Input Watts



1311

#### Zonal Lumen Summary:

0-90 36.4 40.4  
 90-180 53.7 59.6  
 Efficiency = 90%


#### Candlepower Summary

Vertical Angle	0°	22.5°	45°	67.5°	90°
0	558	558	558	558	558
10	694	672	656	640	534
20	693	680	676	646	511
30	619	602	615	623	455
40	634	549	515	515	388
50	744	606	484	401	309
60	843	670	509	347	216
70	918	723	532	333	132
80	959	751	558	343	72
90	970	760	557	342	12
100	969	761	578	381	149
110	962	777	595	409	455
120	937	769	619	513	435
130	873	762	681	680	394
140	874	847	849	898	387
150	1025	1025	1073	1117	946
160	1223	1212	1227	1215	1060
170	1311	1284	1274	1266	1110
180	1159	1159	1159	1159	1159

## PHOTOMETRICS

### WAL14-P-2T8-04-TMW

Report #LSI15373  
 D=39.0% I=61.0%  
 2950 Lamp Lumens  
 60 Input Watts



1234

#### Zonal Lumen Summary:

0-90 25.59 39.00  
 90-180 40.02 61.00  
 Efficiency = 65.6%

#### Candlepower Summary

Vertical Angle	0°	22.5°	45°	67.5°	90°
0	543	543	543	543	543
5	537	531	506	502	488
15	515	468	400	367	342
25	473	381	275	249	249
35	414	278	215	239	253
45	338	176	193	251	283
55	251	125	186	279	334
65	158	83	200	332	396
75	71	61	223	371	441
85	7	61	234	393	461
90	0	62	232	391	458
95	21	65	232	389	455
105	144	102	227	371	435
115	305	230	243	337	394
125	466	380	319	366	387
135	624	537	444	446	438
145	763	700	584	576	538
155	874	813	731	699	670
165	952	918	859	840	821
175	991	986	965	960	955
180	990	990	990	990	990

**APPLICATIONS** Stairwells, lobbies, hallways, open offices, small offices, retail, bathrooms.

**FEATURES** New frost acrylic fascia for updated look and increased fixture efficiency. Also available with perforated or optional finish solid fascia. Fixture is open on the top and the bottom to give a wash of light above and below, while the kicker reflector pushes light out and away to wash the ceiling. Dimming, emergency, and integrated occupancy sensor options are available.

**CONSTRUCTION**  
 Housing 2-, 3-, 4-, 6- or 8-foot standard lengths.

End Plates 20-gauge steel, >20% PC recycled, 100% recyclable.

**ELECTRICAL** T8 fixtures have instant-start electronic ballasts with less than 20% THD. T5/T5HO fixtures have programmed-start electronic ballasts with less than 10% THD. Fixtures are U.L. Damp labeled and I.B.E.W. manufactured. Maximum ballast size available: 2.4" width x 1.5" height.


**MOUNTING** Fixture is to be mounted directly to a wall or surface mounted on ceilings.




<b>NEW</b> YSW – Seashell White (Matte)	<b>NEW</b> YCH – Champagne (Metallic)
YSL – Silver (Metallic)	YPE – Pewter (Matte)
YRG – Rain Grey (Gloss)	YSTM – Storm Grey (Matte)
<b>NEW</b> YBK – Black (Matte)	<b>NEW</b> YBB – Black (Semi Gloss)
YSKM – Sky (Matte)	<b>NEW</b> YMB – Military Blue (Matte)
<b>NEW</b> YIB – Interstate Blue (Matte)	YSAM – Sapphire (Matte)
<b>NEW</b> YFGM – Forest Green (Matte)	YBR – Bronze (Matte)
YBY – Boysenberry (Matte)	YSRM – Sunset Red (Matte)
<b>NEW</b> YOR – Orange (Matte)	YDAM – Daffodil (Matte)



### ADJOINING DETAIL



### MOUNTING DETAIL

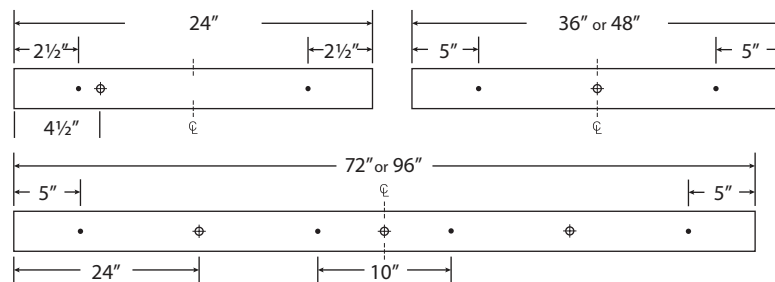

- Mounting hole
- ⊕ 7/8" Wiring K.O.

Choose from one of our Premium Colors with no set-up fee.

For paint chip samples, please e-mail: [info@prulite.com](mailto:info@prulite.com)