



Quad | 4PM Mounting (X3)

INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

GENERAL NOTES

- Contractor to field cut and strip power cord to specified lengths
- Trim excess cable no less than 3" beyond gripper outlet


ROTATIONAL ADJUSTMENT

Loosen j-box screws to rotate
4 point mounting plate




Radial slots for 4" square
to round plaster ring
Radial slots for 4" x 4"
square box
Radial slots for 4" x 4"
octagonal box

FIGURE 2.

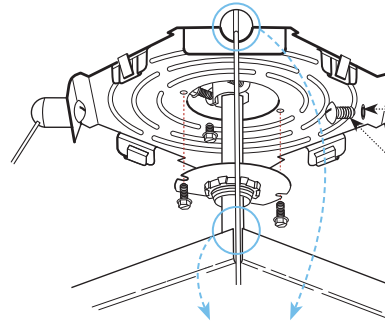

Cable slot on coupler must be
parallel with slot on canopy

INSTALLED ELEVATION:


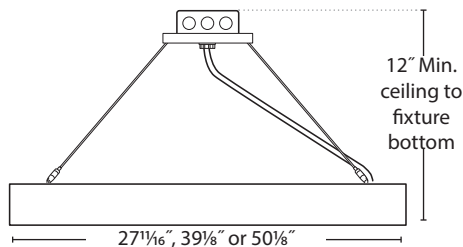


White Snap Bushing
P/N 100-00040-10
Strain Relief Bushing
P/N 100-00063-10

NOTE: 1/2" Diameter K.O. is
standard 3 & 4 wire cord. Use
3/8" diameter with universal
bushing when 5 or 6 wire
cord is required.

18ZG-1420e-315 Gripper
P/N 100-00099-08

**For Dual Feed
Installations – We
Provide A 2-Hole
Canopy And 2-Hole
Cord Retainer Plate**

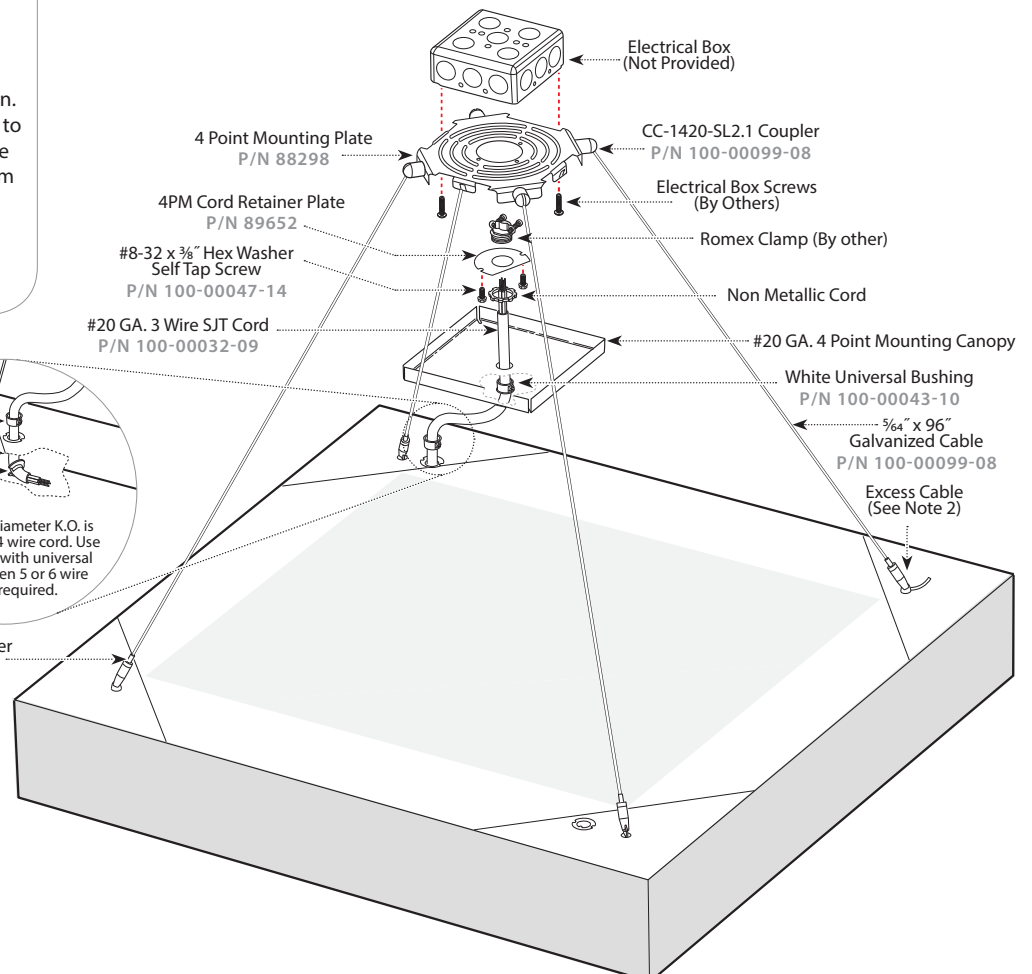

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



Quad | 4PM Mounting (X1)

INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

GENERAL NOTES

- Contractor to field cut and strip power cord to specified lengths
- Trim excess cable no less than 3" beyond gripper outlet

ROTATIONAL ADJUSTMENT


Loosen j-box screws to rotate
4 point mounting plate

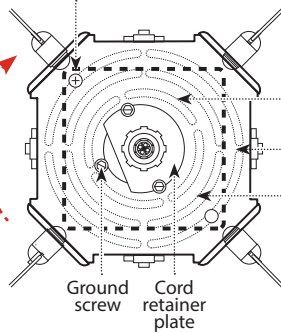

Radial slots for 4" square
to round plaster ring
Radial slots for 4"x4"
square box
Radial slots for 4"x4"
octagonal box

Ground
screw
Cord
retainer
plate


FIGURE 2.

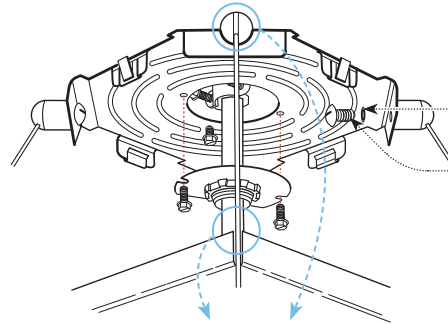

Lock washer,
1/4" internal tooth
P/N 100-00068-14
1/4-20 x 3/8" round HD.
Machine Screw
P/N 100-00099-08

Cable slot on coupler must be
parallel with slot on canopy

INSTALLED ELEVATION:


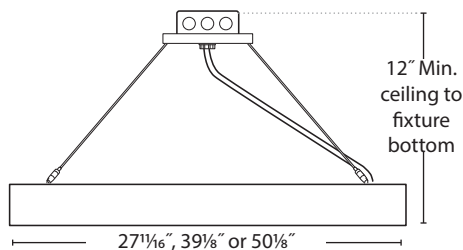


White Snap Bushing
P/N 100-00040-10
Strain Relief Bushing
P/N 100-00063-10

NOTE: 1/2" Diameter K.O. is
standard 3 & 4 wire cord. Use
3/8" diameter with universal
bushing when 5 or 6 wire
cord is required.

18ZG-1420e-315 Gripper
P/N 100-00099-08

**For Dual Feed
Installations – We
Provide A 2-Hole
Canopy And 2-Hole
Cord Retainer Plate**

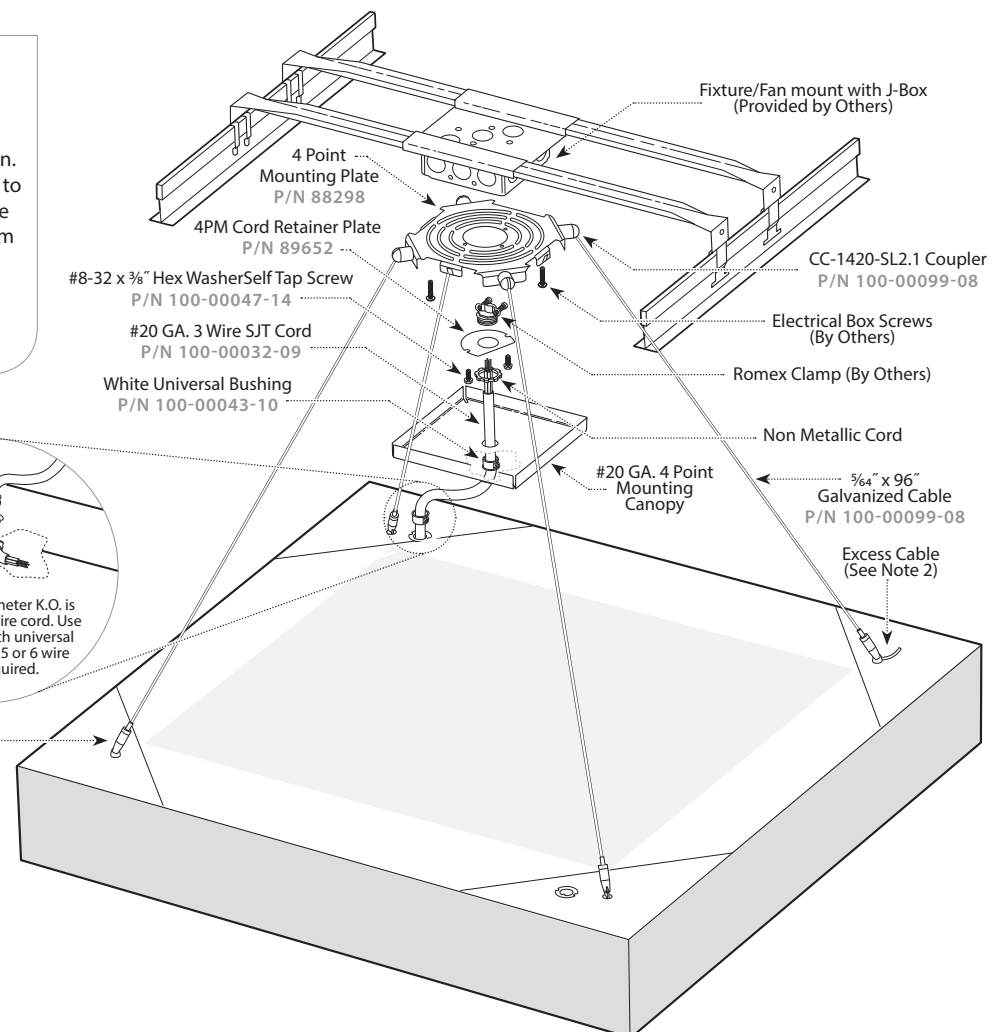

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058