



IES INDOOR REPORT

PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] Bio2-LIN-LED35-LO-MWW-D1W
 [TESTLAB] Intertek
 [ISSUE DATE] September 6, 2016
 [MANUFACT] Prudential Lighting
 [_AGI32] File was generated from AGI32

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1699
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	93
Total Luminaire Watts	18.3
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.12
Spacing Criterion (Diagonal)	1.14
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.21 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7964	9190	7049
55	6928	7476	5592
65	4233	6199	4071
75	2384	5175	2503
85	1047	3221	657

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	826.01	826.01	826.01	826.01	826.01	826.01	826.01	826.01	826.01	826.01
2.5	933.12	924.68	891.29	860.75	834.79	794.61	757.91	738.04	728.86	734.81
5.0	1059.02	1040.30	975.18	899.81	827.65	753.85	691.41	654.35	643.65	655.22
7.5	1158.35	1137.71	1058.88	936.70	820.68	714.34	632.77	591.82	579.47	588.63
10.0	1236.89	1210.39	1125.35	973.68	808.34	674.34	582.83	538.92	523.44	537.17
12.5	1269.12	1270.33	1173.22	1005.57	792.77	633.66	540.23	489.42	470.94	487.08
15.0	1184.49	1230.51	1219.38	1033.59	774.40	598.42	495.98	445.75	424.91	442.29
17.5	1079.61	1129.52	1231.66	1053.50	752.91	562.67	456.78	402.14	382.49	399.00
20.0	982.41	1035.67	1178.94	1068.63	729.41	531.92	419.88	361.79	343.00	358.44
22.5	900.74	946.77	1098.08	1071.83	703.14	496.79	383.43	327.69	310.50	325.26
25.0	831.80	869.41	1025.88	1079.59	673.52	465.53	349.12	296.81	284.01	295.54
27.5	771.36	804.15	946.97	1082.10	641.61	433.72	318.54	274.17	265.48	272.44
30.0	697.81	745.51	872.46	1072.86	611.37	402.31	289.42	255.99	254.91	254.14
32.5	639.24	674.05	802.19	1055.81	573.48	372.79	265.51	242.88	249.55	242.18
35.0	597.37	616.75	738.35	1024.15	535.57	343.83	245.28	234.96	243.30	233.23
37.5	554.40	574.50	687.86	978.61	498.42	316.44	226.01	228.49	234.89	226.38
40.0	503.73	530.04	626.57	917.03	458.42	289.17	209.71	219.35	223.54	217.91
42.5	468.50	478.01	558.23	855.15	422.83	263.29	195.19	206.35	217.46	205.79
45.0	435.70	442.60	502.77	796.75	385.63	239.16	181.52	197.05	217.64	195.35
47.5	405.06	409.96	456.72	730.51	348.51	217.37	169.12	193.34	219.54	190.73
50.0	368.71	375.48	411.70	665.62	313.75	196.28	157.99	193.64	217.38	192.32
52.5	340.41	343.96	369.02	599.83	279.01	175.56	146.09	190.41	203.74	189.84
55.0	307.42	311.52	331.75	538.17	248.15	158.62	135.47	181.36	179.49	180.45
57.5	269.41	285.84	293.89	477.07	215.55	141.57	127.18	169.54	150.35	170.00
60.0	225.84	255.59	263.84	413.60	187.29	125.47	116.81	151.93	123.01	151.84
62.5	177.30	220.04	233.38	354.70	160.19	109.62	104.54	131.79	101.69	130.94
65.0	138.40	182.78	202.69	301.21	133.10	95.29	93.42	111.63	83.14	108.28
67.5	106.69	144.56	175.19	251.39	110.32	80.39	82.48	90.57	68.39	89.09
70.0	82.38	111.98	150.47	206.39	86.57	66.36	71.70	74.35	56.11	72.36
72.5	64.11	83.77	127.11	165.18	67.56	54.59	60.61	59.20	44.97	59.09
75.0	47.74	63.28	103.62	127.12	50.12	43.02	48.59	46.41	35.33	44.86
77.5	36.08	44.70	81.25	94.07	35.12	30.61	37.76	34.47	27.31	33.10
80.0	24.98	30.95	58.97	63.96	24.22	21.43	27.67	24.62	17.76	23.10
82.5	15.10	18.52	40.04	39.73	12.15	12.64	16.53	14.41	11.65	14.56
85.0	7.06	9.45	21.72	18.40	4.43	5.05	8.53	6.56	6.11	7.15
87.5	1.66	3.40	8.55	4.81	0.00	0.00	2.33	1.47	1.44	2.26
90.0	0.00	0.00	0.27	0.00	0.00	0.00	0.06	0.00	0.00	0.00
92.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
97.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
102.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
107.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
112.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
117.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
122.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
127.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
132.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

CANDELA TABULATION - (Cont.)

135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
137.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
142.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
147.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
152.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
157.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160.0	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.24	0.00
162.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
167.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
172.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.00
175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
177.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	826.01	826.01	826.01	826.01	826.01	826.01	826.01
2.5	746.16	782.33	831.31	872.78	903.84	925.45	933.12
5.0	679.94	742.29	827.22	909.38	985.68	1041.18	1059.02
7.5	624.31	700.64	819.11	945.78	1066.79	1135.37	1158.35
10.0	574.85	662.60	807.79	979.41	1128.67	1206.55	1236.89
12.5	532.41	621.96	789.26	1007.70	1172.71	1262.88	1269.12
15.0	491.30	587.31	772.70	1027.46	1218.91	1216.78	1184.49
17.5	449.91	552.26	750.62	1043.96	1214.81	1118.29	1079.61
20.0	412.75	520.04	728.52	1051.23	1157.91	1027.81	982.41
22.5	376.71	490.47	698.37	1061.67	1080.98	940.86	900.74
25.0	343.21	452.91	668.99	1060.27	1003.82	864.73	831.80
27.5	315.03	422.46	636.79	1055.99	933.00	799.89	771.36
30.0	286.17	391.80	599.45	1039.58	854.26	736.77	697.81
32.5	261.05	364.03	562.15	1012.83	784.13	667.80	639.24
35.0	242.15	334.12	525.98	978.53	722.42	608.31	597.37
37.5	221.96	306.18	490.12	930.82	668.80	566.59	554.40
40.0	205.92	279.03	452.66	878.27	609.28	521.93	503.73
42.5	191.48	253.09	418.47	819.20	543.89	473.28	468.50
45.0	177.69	230.71	380.61	764.66	490.55	435.39	435.70
47.5	166.04	209.06	341.10	699.65	442.72	402.63	405.06
50.0	155.59	187.69	305.59	641.07	396.65	370.71	368.71
52.5	144.03	168.52	274.93	572.95	355.93	337.68	340.41
55.0	132.35	152.27	240.30	514.65	318.93	306.56	307.42
57.5	123.18	134.38	211.96	450.86	284.75	278.67	269.41
60.0	113.81	119.37	183.07	391.05	252.96	248.68	225.84
62.5	103.35	103.54	155.58	336.71	223.65	215.53	177.30
65.0	91.16	91.14	131.09	284.78	194.58	177.58	138.40
67.5	79.43	77.13	107.31	235.73	168.15	141.35	106.69
70.0	69.48	64.34	86.71	191.98	143.16	111.66	82.38
72.5	57.82	52.16	66.51	153.16	120.16	84.01	64.11
75.0	48.92	39.13	50.07	117.73	97.36	61.80	47.74
77.5	37.68	30.44	36.08	85.71	74.55	44.96	36.08
80.0	27.55	20.88	23.67	57.73	54.04	30.80	24.98

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

CANDELA TABULATION - (Cont.)

82.5	16.94	12.06	13.59	34.78	34.28	18.67	15.10
85.0	8.52	4.94	4.50	15.41	18.32	9.17	7.06
87.5	1.61	0.00	0.09	2.45	6.38	2.04	1.66
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
92.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
97.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
102.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
107.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
112.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
117.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
122.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
127.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
132.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
137.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
142.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
147.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
152.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
157.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
162.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
167.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
172.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
177.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	309.01	N.A.	18.20
0-30	613.45	N.A.	36.10
0-40	935.28	N.A.	55.00
0-60	1465.79	N.A.	86.30
0-80	1685.87	N.A.	99.20
0-90	1699.22	N.A.	100.00
10-90	1618.96	N.A.	95.30
20-40	626.27	N.A.	36.90
20-50	920.13	N.A.	54.20
40-70	681.46	N.A.	40.10
60-80	220.08	N.A.	13.00
70-80	69.13	N.A.	4.10
80-90	13.35	N.A.	0.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1699.22	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	80.26
10-20	228.76
20-30	304.43
30-40	321.84
40-50	293.86
50-60	236.64
60-70	150.96
70-80	69.13
80-90	13.35
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : BIO2-LIN-LED35-LO-MWW-D1W.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	108	104	101	97	100	97	94	96	94	92	92	91	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65
4	86	75	67	61	84	74	67	61	72	65	60	69	64	59	67	62	58	56
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44
7	69	57	48	43	67	56	48	42	54	47	42	53	47	42	52	46	42	40
8	65	52	44	39	63	51	44	38	50	43	38	49	43	38	48	42	38	36
9	61	48	40	35	59	47	40	35	46	40	35	45	39	35	44	39	34	33
10	57	45	37	32	56	44	37	32	43	36	32	42	36	32	41	36	32	30

POLAR GRAPH

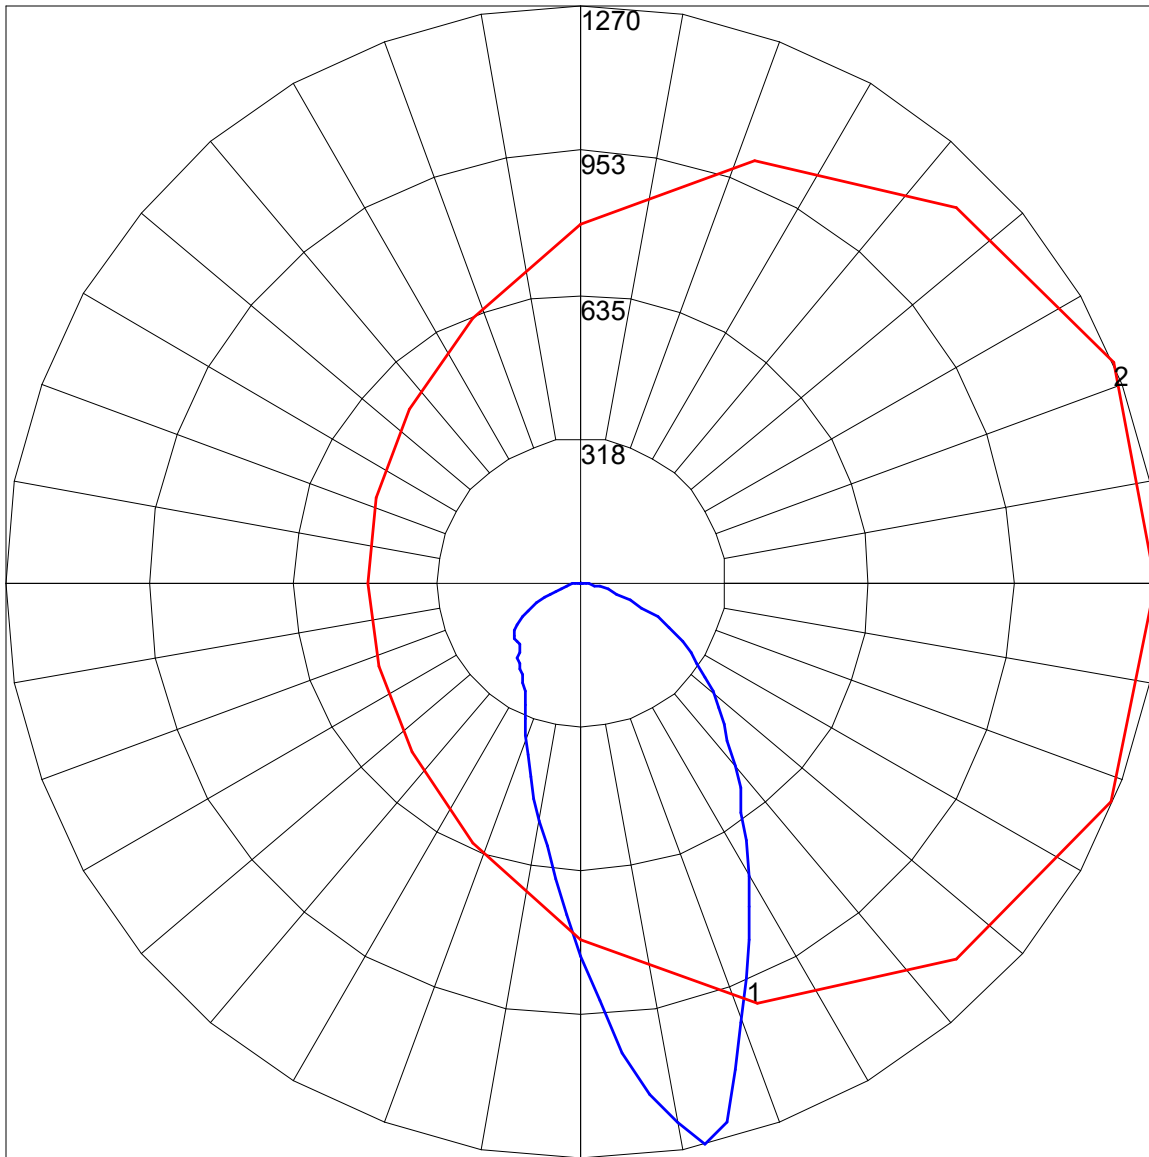

Maximum Candela = 1270.33 Located At Horizontal Angle = 22.5, Vertical Angle = 12.5
1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (12.5) (Through Max. Cd.)