

# Snap + Bolt Series

Erector set functionality, architectural aesthetics

versatile







Photo rendering modification of existing Prudential Ltg. project



### ROUNDING A NEW CORNER. LITERALLY.

New streamlined Bolt is Snap's sleeker sibling. Extruded aluminum housing and seamless 3-sided lens give it a sophisticated vibe. Linear, yes, but Bolt is so much more. Triangles, squares, pentagons and hexagons – or create your own fully illuminated graphic patterns. (Go crazy – we can't wait to see how you put the pieces together.)

# Snap + Bolt Series

Erector set functionality, architectural aesthetics





SNAP SERIES

Bolt

Our Snap Series set the bar high – Bolt kicks it up yet another notch.

No longer constrained to 1’ increments, Bolt is offered in nearly infinite configurations, any row length with fully illuminated corners allowing a wide range of shapes while providing new tools for creating an endless array of fully illuminated graphic patterns.




Photo rendering



“Snap has been a ‘go-to’ for years, Bolt takes it to the next level with fully lit patterns.”


— HEATHER LIBONATI, LUMINESCE DESIGN



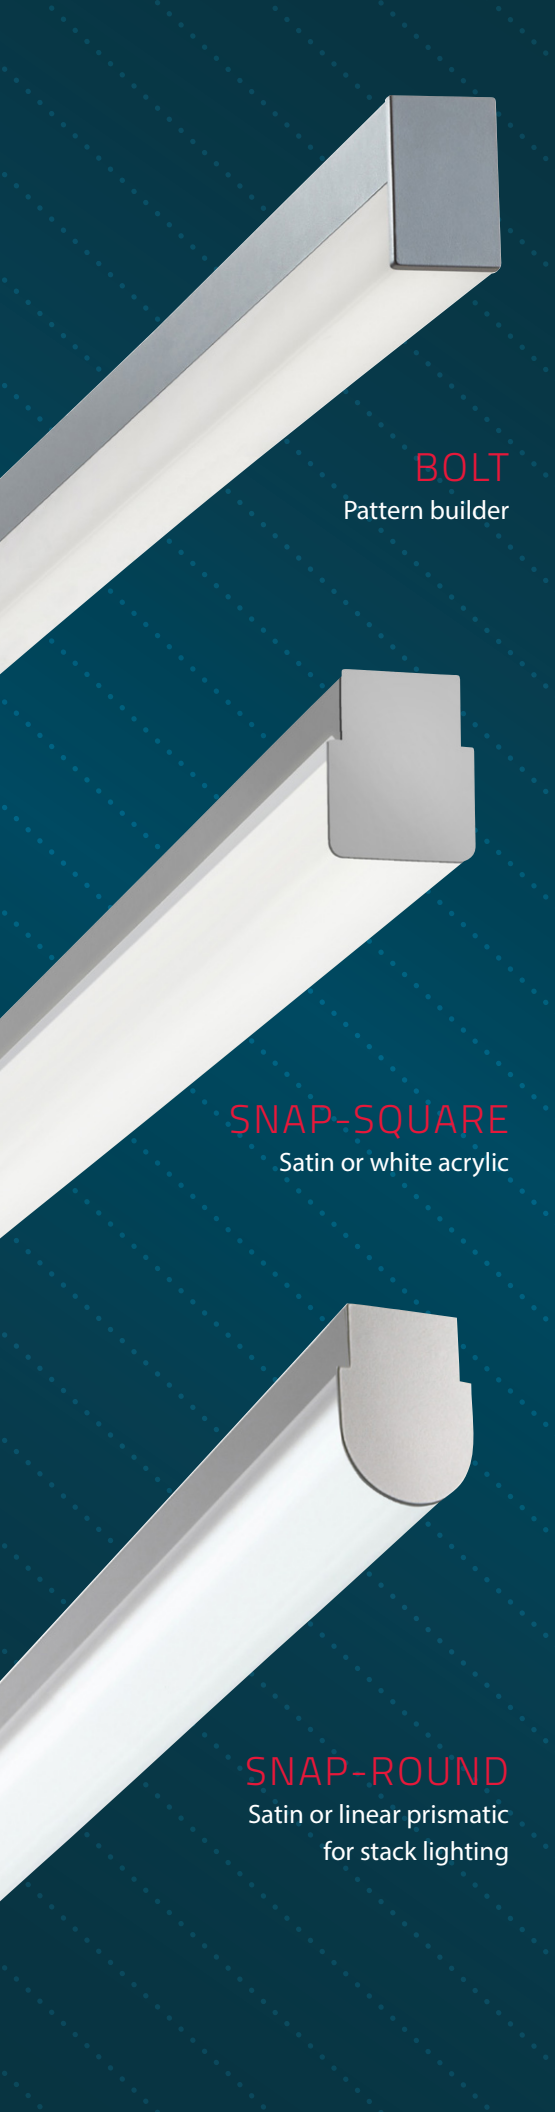

## COMPARISON


ENDCAPS HOUSING SENSORS LENGTH CORNERS	SNAP	VS.	BOLT
	Unlit 90° & 135° 2-3-4 Way		Lit 45° - 180° 2-3-4 Way
	1' Increments		1/16" Increments
	Adds 3" section to end of individual or row		Integrated No extra length required
	Steel		Extruded aluminum
	Stamped		Cast

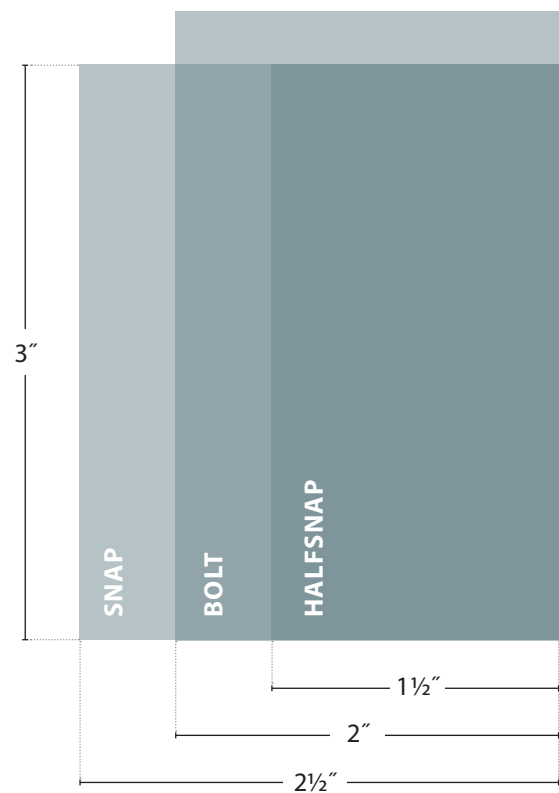


— Actual Sizes

## BOLT



Lit Corners in 1° Increments

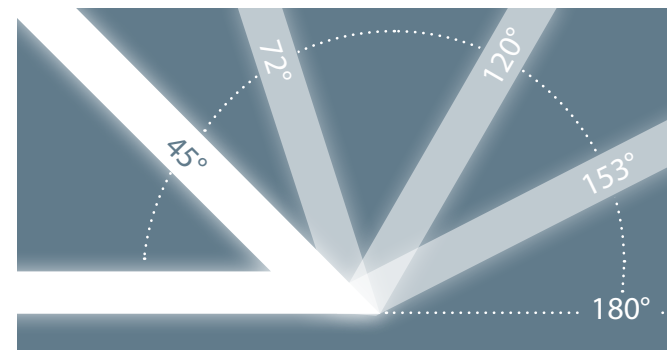

Integrated Sensors in all Shapes

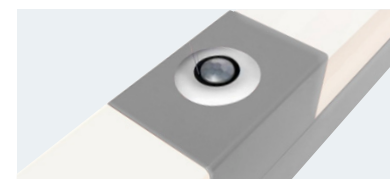

Sensors install  
anywhere in a row  
while maintaining  
8' mounting points

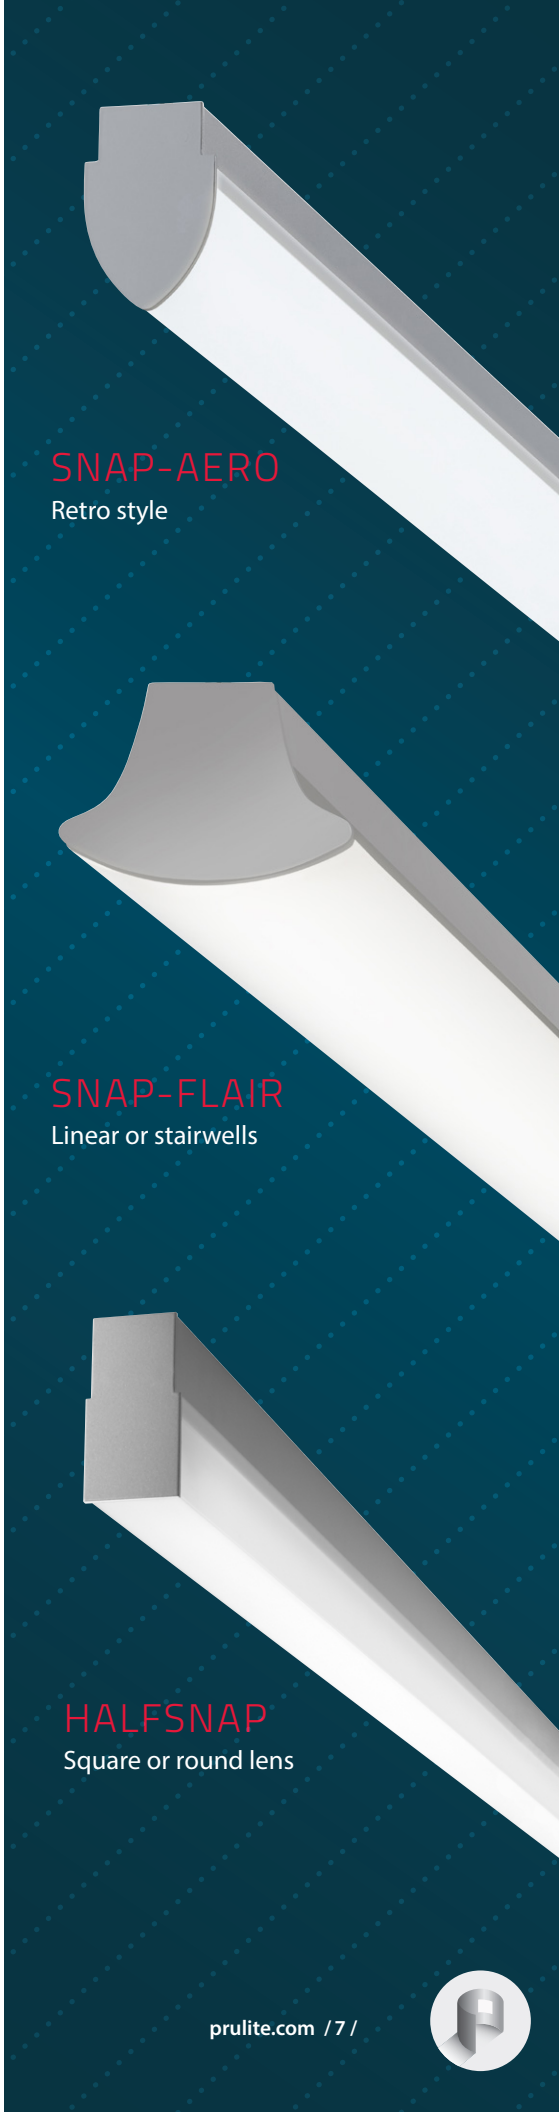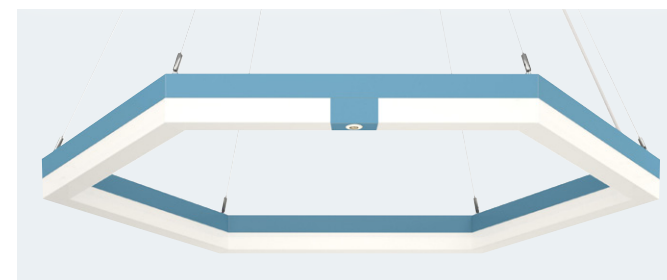




# Bolt Shapes


**Working all the angles.** Forgettable these shapes are not. Angular and distinctive, they command attention wherever they go, and they can go pretty much anywhere. In entries and social spaces, open and private offices, corridors and stairwells, Bolt in any form is a highly adaptable luminaire.

PENTAGON  
41" Diameter

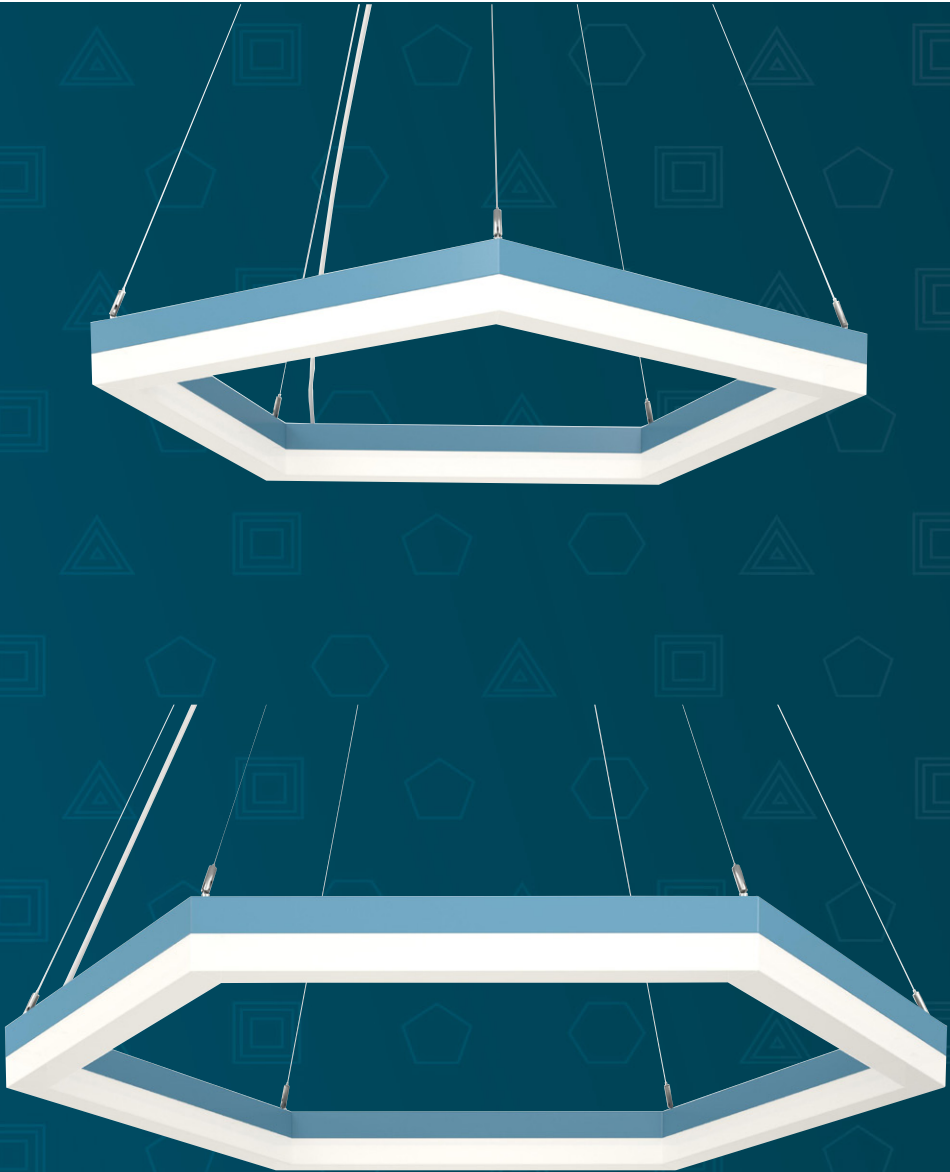

HEXAGON  
50" Diameter

TRIANGLE  
2', 3' & 4'

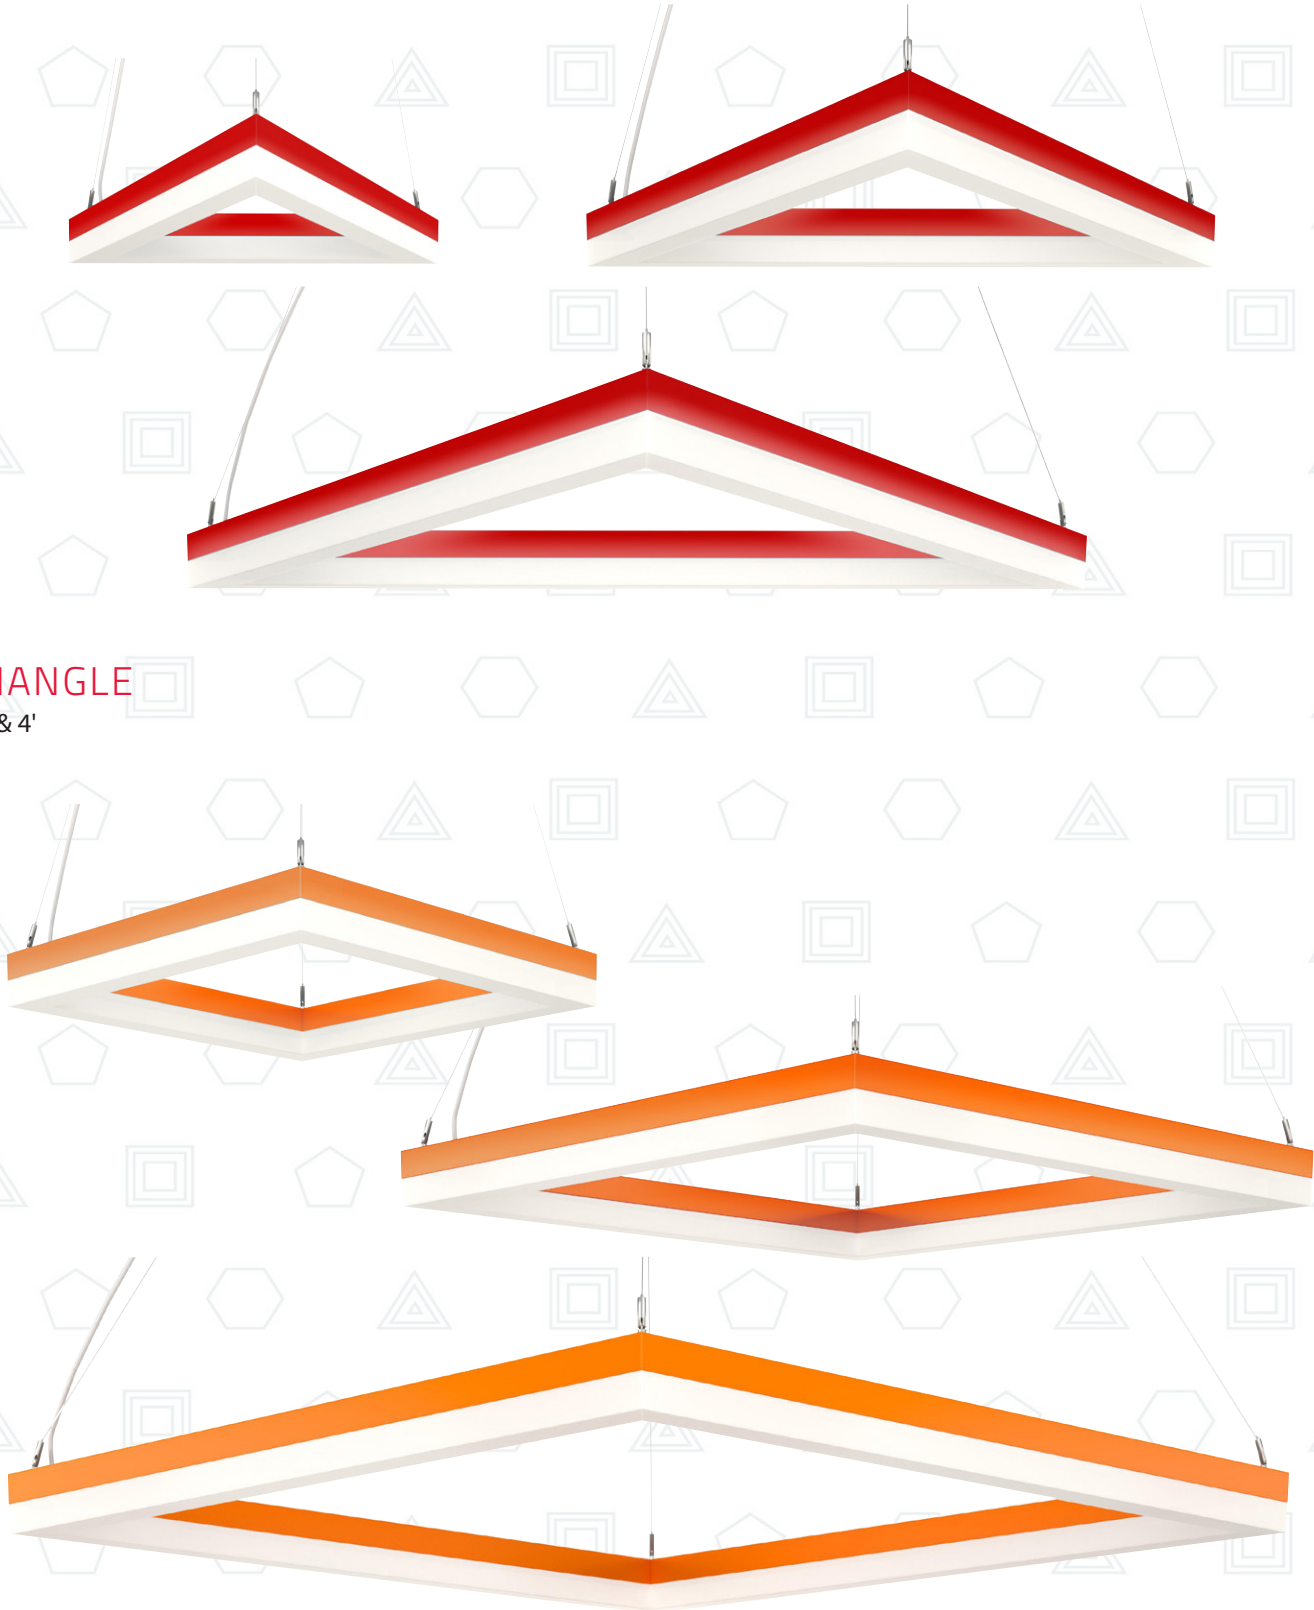

SQUARE  
2', 3' & 4'









Photo rendering

## SNAP SERIES

# Bolt

**Snap’s sleeker, more sophisticated sibling.** Linear, yes. But Bolt is so much more. Basic but not boring, it’s an infinitely flexible, sleek architectural wrap – available in any row length (1/16” increments) and a multitude of lit corners – offering a linear option that’s more adaptable than ever.



**BOLT-LED35-MO**  
2565 Delivered Lumens  
23 Watts  
114 lm/w

UP TO **114** LM/W


	LO	MO	SO	HO
lm/ft	470	640	760	890
w/ft	4.2	5.6	7	8.75

SERIES	LED COLOR	OUTPUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS
BOLT	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	2' 3' 4' 5' 6' 7' 8' R (Row length to 1/16") SRL Symmetric Row Length (See page 5.) Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd <b>NOTE:</b> Individual fixtures are NOT intended for row mounting For Patterns, Specifiers may write in 'Pattern' and include a drawing with corners and dimensions	SAL Satin Acrylic Lens	TMW Textured Matte White YGW Gloss White (Standard) Y Premium Color CC Custom Color <b>NOTE:</b> All canopies are painted the same color as the fixture. Consult factory to specify	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	SUR Surface or Wall Mount CA48", 96" & 144" Aircraft Cable (Adjustable)	X1 T-Bar 15/16" or 3/16" (Standard) Consult factory for % Regular X3 Hard Ceiling X6 Slot Grid or Interlude	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) DM10 0-10v, 10% Dimming LDE5* 5-Series EcoSystem LED LDE1* Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) LTE* Hi-lume 1% 2-Wire LED Driver (120V forward phase only) *NA with HO ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EML* Emergency Battery, Low (850 delivered lumens) EMH* Emergency Battery, High (1175 delivered lumens) *4' or longer (remote for < 4') EBCP1G/2G Single Gang / Dual Gang (Electrical Box Cover Plate/Mud Ring) PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams EllipseV <b>SENSORS:</b> 205 WattStopper PIR Occupancy 205-ND: On/off 205-DM: Dim to 10% / 1% 205-STEP: Dim to 50% ENL Enlighted2-Wire DLH & Environmental <b>CORNERS:</b> C2 Lit 2-Way C3T Lit 3-Way 90°: T C3Y 120° Lit 3-Way: Y C4 Lit 4-Way 90° Cross C2X Lit 2-Way, (Any angle 45° to 179°, 1" increments) C3T-X Lit 3-Way: T (45° to 135°) C3Y-X Lit 3-Way: Y (45° to 135°) C4X Lit 4-Way (45° to 135°)

VISIT [PRULITE.COM](http://PRULITE.COM) FOR ALL SNAP SERIES SPECIFICATIONS





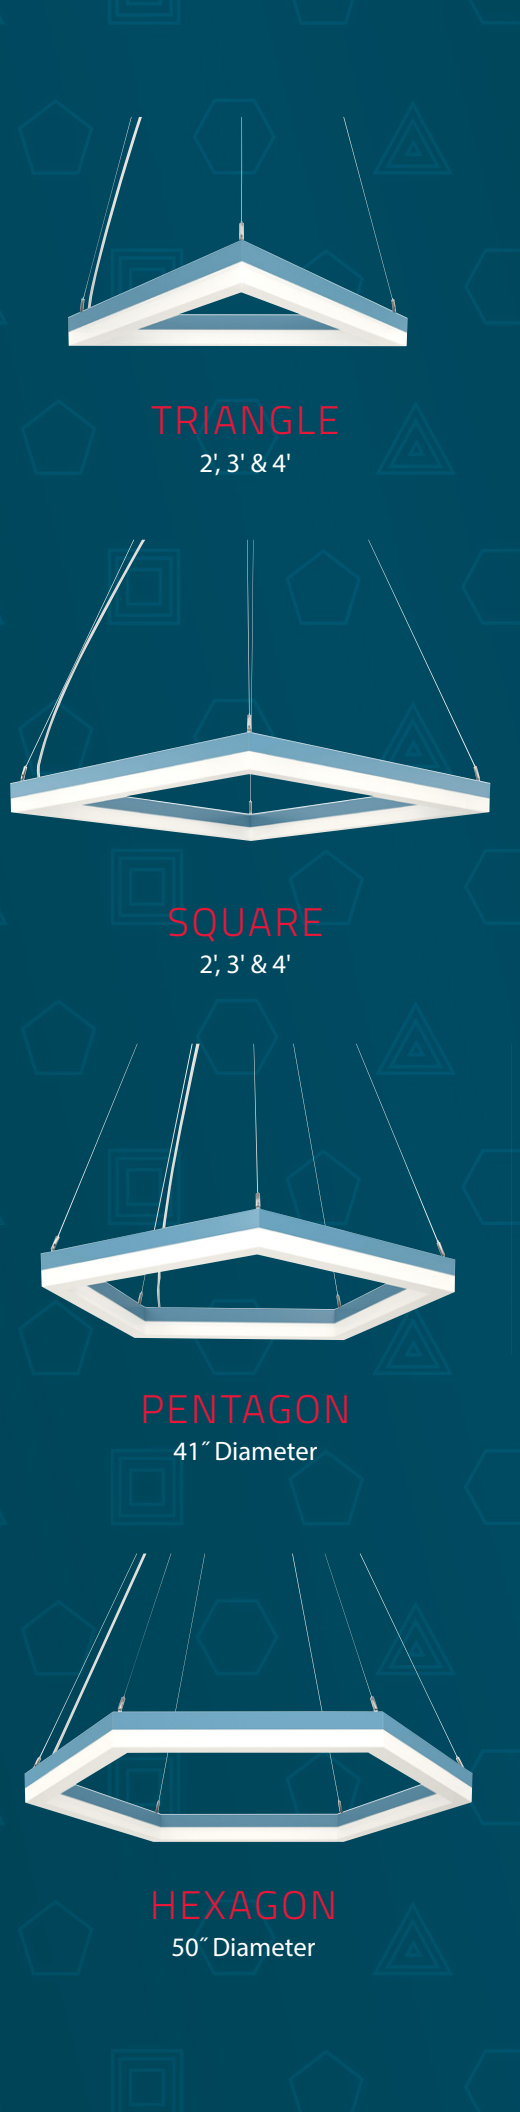

TRIANGLE  
2', 3' & 4'

SQUARE  
2', 3' & 4'

PENTAGON  
41" Diameter

HEXAGON  
50" Diameter



Photo rendering modification of existing Prudential Ltg. project

SNAP SERIES

Bolt Shapes

**Working all the angles.** Combinable sizes, shapes and colors for complex patterns, these geometric angles inspire, giving architects and lighting designers new fodder for thought. See Bolt linear to build larger triangles, rectangles or a myriad of other shapes.

SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS
BTRI Triangle	22 2' x 2' x 2'	LED27 2700K (90CRI)	LO Low	SAL Satin Acrylic Lens	TMW Textured Matte White	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	3PTM (BTRI) Round / Square Cast Aluminum Canopy (Min from fixture to ceiling 2': 14", 3': 22", 4': 30")	X1 T-Bar 1 1/4" or 3/4" Exposed (Standard)	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard)	EML* Emergency Battery, Low (850 delivered lumens)
	33 3' x 3' x 3'	LED3 3000K	MO Medium							
	44 4' x 4' x 4'	LED35 3500K	SO Standard							
BSQ Square	22 2' x 2'	LED4 4000K	HO High		Y Premium Color		4RPM / SPM 48", 96" or 144" (BSQ) Round / Square Cast Aluminum Canopy (Min from fixture to ceiling 2': 14", 3': 22", 4': 30")	X3 Hard Ceiling	DM10 0-10v, 10% Dimming	EMH* Emergency Battery, High (1175 delivered lumens) *3' or longer (remote for < 3')
	33 3' x 3'	LED3-90 90CRI	PROG Pro-gramma-ble Light Output (Specify desired lm/ft or w/ft)							
	44 4' x 4'	LED35-90 90CRI								
BPEN Pentagon	22 2' x 2' x 2' x 2' x 2' (41" Diameter)	LED4-90 90CRI			CC Custom Color	NOTE: All canopies are painted the same color as the fixture unless specified otherwise	5RPM / SPM 48", 96" or 144" (BPEN) Round / Square Cast Aluminum Canopy (24" min from fixture to ceiling)	X6 Slot Grid or Interlude	LDE5 5%, Lutron (Ecosystem)	PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAd-ams Ellipse
BHEX Hexagon	22 2' x 2' x 2' x 2' x 2' x 2' (50" Diameter)						6RPM / SPM 48", 96" or 144" (BHEX) Round / Square Cast Aluminum Canopy (24" min from fixture to ceiling)		LDE1 1%, Lutron (Soft Fade to Black, Ecosystem)	
							CA48", 96" or 144" Aircraft Cable (Adjustable)		ECO 1% 0-10v, EldoLED	
							SUR Surface or Wall Mount (Hard ceiling only)		ECDA 1% DALI, EldoLED	
									SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	
									SODA 0.1% DALI, EldoLED (Dim to Dark)	

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS








Snap Square, 4-way Corner  
CLIENT | AEP ARCHITECT | Design Collaborative





CLIENT | CSUN ARCHITECT | LPA Inc. LIGHTING DESIGNER | STUDIOK1

SNAP SERIES

Snap

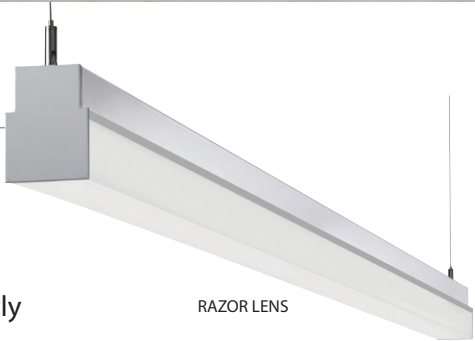

Our basic lighting building block. This perfectly scaled wrap simply snaps quickly, neatly and securely into a wide range of spaces. Excellent optical performance and integrated controls help make Snap both a linear and back-of-house dynamo. Our Linear Prismatic (LLP) lens turns Snap into an outstanding Stack fixture ideal for warehouses, manufacturing, libraries and more.



R1-LED35-MO-04-SAL  
2480 Delivered Lumens  
21.7 Watts  
114 lm/w

UP TO 114 LM/W

	LO	MO	SO
lm/ft	480	620	900
w/ft	4.2	5.5	9

SE-RIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS
R1 Round	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic Lens	TMW Textured Matte White	UNV (120-277)	SUR Surface or Wall Mount	X1 T-Bar 1 9/16" or 3/4" Exposed (Standard) Consult factory for 3/8" Tegular	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) DM10 0-10v, 10% Dimming	EML* Emergency Battery, Low (850 delivered lumens) EMH* Emergency Battery, High (1175 delivered lumens) *4' or longer (remote for < 4') TR5 Tamper-Resistant Screws
S1 Square	LED3 3000K	MO Medium	4'	LLP Linear Prismatic Acrylic Lens (Stack optics, R1 Only)	Y Premium Color	347 (Emergency battery requires a Step Down transformer)	CA48", 96" or 144" Aircraft Cable (Adjustable)	X3 Hard Ceiling X6 Slot Grid or Interlude	STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5-Series EcoSystem LED	EBCP1G / 2G Electrical Box Cover Plate/ Mud Ring (Single / dual gang) PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse
RZ Razor Sharp Edged Lens	LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	SO Standard PROG Programmable Light Output (Specify desired lm/ft or w/ft)	6' 8' R (Row length in 1" increments) SRL Symmetric Row Length Row lengths are typically made up of 8" and 4" fixtures, e.g. 12' row is (1) 8" and (1) 4", unless SRL Symmetric Row Lengths are spec'd	WA White Acrylic Lens (N/A - RZ)	CC Custom Color NOTE: All canopies are painted the same color as the fixture, specify canopy color after fixture (i.e. YPE-TMW for white canopies)				LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	SENSORS: 205† WattStopper PIR Occupancy 205-ND: On/off 205-DM: Dim to 10% / 1% 205-STEP: Dim to 50% 211-FSP L2 / L3 WattStopper DLH & Infrared Occupancy (Adds 6" to fixture length) LUX† Phillips DLH
										505 WattStopper Ultrasonic Occupancy (SUR on wall mount only) 505-STEP: Dim to 50% 505-DM: Dim to 1% NOTE: NA < 4' Sensor off center for 6' or 8' fixtures ENL† Enlighted 2-Wire DLH & Environmental † Adds 3" to fixture length
										CORNERS: C2 Unlit 90° 2-Way C2-120 Unlit 120° 2-Way
										C3 Unlit 90° 3-Way C3-120 Unlit 120° 3-Way C4 Unlit 90° 4-Way

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS







Photo rendering modifications of existing Prudential Ltg. project





Photo rendering modifications of existing Prudential Ltg. project

SNAP SERIES

Flair

**Stairwell and corridor workhorse.** The hard-working Flair blends the best of our Snap Series and Wal14, with a gentle, sweeping bell curve shape. Understated and utilitarian with a touch of style, it works well as a linear pendant or behind the scenes in stairwells and corridors, complete with integrated motion sensors for maximum energy efficiency.



**FLAIR-LED35-LO-SAL**  
233 Delivered Lumens  
18 Watts  
128 lm/w

**UPTO 128 LM/W**

	LO	MO	SO	HO
lm/ft	575	875	1250	1400
w/ft	4.5	7	10	12

SE-RIES	LED COLOR	OUTPUT	NOMINAL LENGTH	SHIELD-ING	COLOR/ FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS
FLAIR Snap-Flair	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic Lens (WA Lens N/A)	TMW Textured Matte White	UNV (120-277)	SUR Surface or Wall Mount	X1 T-Bar Exposed X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming	EML* Emergency Battery, Low (850 delivered lumens) EMH* Emergency Battery, High (1175 delivered lumens) *4' or longer (remote for < 4') EBCP1G / 2G Electrical Box Cover Plate/Mud Ring (Single / dual gang) SENSORS: 205† WattStopper PIR Occupancy 205-ND: On/off 205-DM: Dim to 10% / 1% 205-STEP: Dim to 50% 505 WattStopper Ultrasonic Occupancy (SUR on wall mount only, N/A galvanized) 505-STEP: Dim to 50% 505-DM: Dim to 10%
	LED3 3000K	MO Medium	3'		YGW Gloss White (Standard)	347 (Emergency battery requires a Step Down transformer)			DM10 0-10v, 10% Dimming (Standard)	
	LED35 3500K	SO Standard	4'		Y Premium Color				DM01 0-10v, 1% Dimming	
	LED4 4000K	HO High	6'		CC Custom Color				STEP Step Dimming, 100-50-Off, Osram	
	LED3-90 90CRI	PROG Programmable Light Output (Specify desired lm/ft or w/ft)	8'		NOTE: All canopies are painted the same color as the fixture. Consult factory to specify				NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory	
	LED35-90 90CRI		R (Row length in 1' increments)						LDE5 5-Series EcoSystem LED	LUX† Phillips DLH 3NL† Enlited 2-Wire DLH & Environmental † Adds 3" to fixture length
	LED4-90 90CRI		SML Sym-metric Row Length						LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)	
			Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd						LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only)	
			NOTES: Individual fixtures are NOT intended for row mounting						ECO 1% 0-10v, EldoLED (Logarithmic dimming std)	
									ECDA 1% DALI, EldoLED (Logarithmic dimming std)	
									SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	
									SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS










Photo rendering modification of existing Prudential Ltg. project

SNAP SERIES

Aero

**Sleek and streamlined with a touch of retro style.** Minimalist and Machine age-inspired, this aerodynamic spin on our ever-popular Snap offers a subtle retro nod without being ‘themey.’

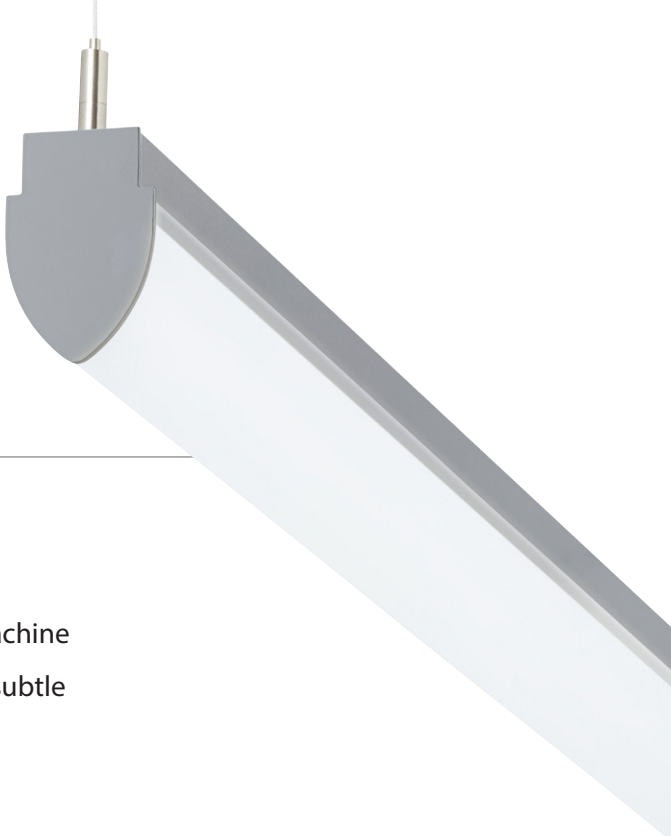

UPTO 120 LM/W			
	LO	MO	SO
lm/ft	530	650	1000
w/ft	4.2	5.5	9

SERIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS
AERO Snap-Aero	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic Lens (WA Lens N/A)	TMW Textured Matte White	UNV (120-277)	SUR Surface or Wall Mount	X1 T-Bar Exposed X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming	EML* Emergency Battery, Low (850 delivered lumens)  EMH* Emergency Battery, High (1175 delivered lumens) <i>* 4' or longer (remote for &lt; 4')</i>  EBCP1G / 2G Electrical Box Cover Plate/ Mud Ring (Single / dual gang)  <b>SENSORS:</b> 205' WattStopper PIR Occupancy 205-ND: On/off 205-DM: Dim to 10% / 1% 205-STEP: Dim to 50%  505 WattStopper Ultrasonic Occupancy (SUR on wall mount only, N/A galvanized) 505-STEP: Dim to 50% 505-DM: Dim to 10%
	LED3 3000K	MO Medium	4'		YGW Gloss White (Standard)	347 (Emergency battery requires a Step Down transformer)			DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram <b>NOTE:</b> Lumens and watts per foot may differ for STEP drivers, consult factory	
	LED35 3500K	SO Standard	8'		Y Premium Color	LDE5 5-Series EcoSystem LED LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)				
	LED4 4000K	PROG Programmable Light Output (Specify desired lm/ft or w/ft)	R (Row length in 1' increments)		CC Custom Color	LTE Hi-lume 1% 2-Wire LED Driver (120V forward phase only) * NA with HO				
	LED3-90 90CRI	Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd  <b>NOTE:</b> Individual fixtures are NOT intended for row mounting	SML Sym-metric Row Length		<b>NOTE:</b> All canopies are painted the same color as the fixture, specify canopy color after fixture (i.e. YPE-TMW for white canopies)	ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)				
	LED35-90 90CRI									
	LED4-90 90CRI									
										TRS Tamper-Resistant Screws  PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse  

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS







FIXTURES | Zenith Out CLIENT & ARCHITECT | LPA Architects, San Jose, CA



CLIENT | Wendy's 90° Lab, Columbus, OH DESIGNER | WSA Studio



FIXTURE | Snap CLIENT | Alterra, Provo, UT DESIGNER | Rapt Studio





CLIENT | TRIS3CT ARCHITECT | Gary Lee Partners






CLIENT | Monster Energy ARCHITECT | H. Hendy Associates PHOTOGRAPHER | Sherman Takata

SNAP SERIES

HalfSnap

A designer minimalist go-anywhere, do-anything wrap. A more slender variation on Snap often utilized in graphic patterns, and coveted for its small stature and clean lines.

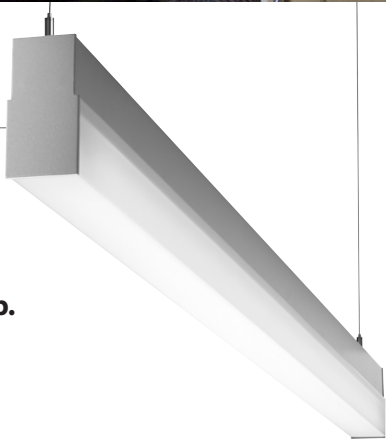

HSS-LED4-LO-SAL  
1925 Delivered Lumens  
16.7 Watts  
115 lm/w

UP TO 115 LM/W

	LO	MO	SO
lm/ft	480	625	880
w/ft	4.2	5.5	9

SE-RIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	CIRCU-ITING	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS						
HSS Square HSR Round	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic Lens	TMW Textured Matte White	SC Single Circuit	UNV (120- 277)	SUR Surface or Wall Mount (Standard)	X1 T-Bar 1 <sup>5</sup> / <sub>16</sub> " or <sup>5</sup> / <sub>8</sub> " Exposed (Standard) Consult factory for <sup>5</sup> / <sub>8</sub> " Tegular	ND Non-Dimming  DM01 0-10v, 1% Dimming (Standard)  DM10 0-10v, 10% Dimming  STEP Step Dimming, 100-50-Off, Osram  NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory	EML Emergency Battery, Low (850 delivered lumens, 4' or longer, remote for <4'; DALI 6' or longer, remote for <6')	EBCP1G / 2G Electrical Box Cover Plate/Mud Ring (Single / dual gang)					
	LED3 3000K	MO Medium	3'		YGW Gloss White (Standard)		347 (Emer- gency battery requires a Step Down trans- former)						CA48", 96" or 144"	X3 Hard Ceiling	LDE5* 5-Series EcoSystem LED	PRUBIN Meticulous Bin- ning and Labeling every LED Board within a 2-Step MacAdams Ellipse	
	LED35 3500K	SO Stan- dard	4'		Y Premium Color								X6 Slot Grid or Interlude	LDE1* Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)	SENSORS:  205 <sup>5</sup> WattStopper PIR Occupancy  205-STEP: Dim to 50% 205-DM: Dim to 1%		
	LED4 4000K	PROG Pro- gram- ma- ble	6'		CC Custom Color									LTE* Hi-lume 1% 2-Wire LED Driver (120V forward phase only)			CORNERS:  C2 Unlit 90° 2-Way  C2-120 Unlit 120° 2-Way
	LED3-90 90CRI	Light Out- put (Specify desired lm/ft or w/ft)	8'		NOTE: All canopies are painted the same color as the fixture. Con- sult factory to specify after fixture (i.e. YPE-TMW for white canopies)									ECO 1% 0-10v, EldoLED (Logarithmic dimming std)			
LED35-90 90CRI		Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd				* NA with HO											
LED4-90 90CRI			NOTES: Individual fixtures are <u>NOT</u> intended for row mounting														
			</														

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS






SNAP SERIES

Zenith

**Simple, yet far from ‘standard’.** Start with 90° angles, and let your imagination take it from there. Zenith elevates the HalfSnap into an architectural luminaire with clean lines and dramatic, just-unique-enough configurations.



ZENITH OUT

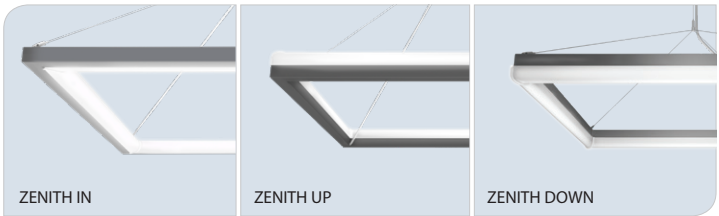

UP TO 115 LM/W				
		LO	MO	SO
22:	lm/ft	3800	5000	7000
	w/ft	34	44	72
33:	lm/ft	5750	7500	10500
	w/ft	50	66	108
44:	lm/ft	7650	9950	14100
	w/ft	67	88	140

SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELD-ING	COLOR/ FINISH	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
IN: ZIS Square Lens ZIR Round Lens	22 2' x 2' 33 3' x 3' 44 4' x 4'	LED27 2700K (90CRI) LED3 3000K	LO Low MO Medium SO Standard	SAL Satin Acrylic Lens	TMW Textured Matte aWhite YGW Gloss White (Standard) Y Premium Color CC Custom Color	SC Single Circuit	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	4SPM48", 96" or 144 Square Cast Aluminum Canopy (4SPM: 2; 3; 4') 4RPM48", 96" or 144 Round Cast Aluminum Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30") MPCA48", 96" or 144" Monopoint Mounting (Min from fixture to ceiling 22: 14", 33: 22", 44: 30") NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable) SUR Surface or Wall Mount (Hard ceiling only)	X1 T-Bar Exposed X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) DM10 0-10v, 10% Dimming STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5%, Lutron (Ecosystem) LDE1 1%, Lutron (Soft Fade to Black, Ecosystem) L3DA 1%, Lutron, 3 Wire ECO 1% 0-10v, EldoLED ECDA 1% DALI, EldoLED (Dim to Dark) SOLO 0.1% 0-10v, EldoLED (Dim to Dark) SODA 0.1% DALI, EldoLED (Dim to Dark)	EML* Emergency Batwtery, Low (850 delivered lumens) EMH* Emer- gency Battery, High (1175 delivered lumens) * NA - 2', integral for 3' and 4' EBCP1G / 2G Electrical Box Cover Plate/Mud Ring (Single / dual gang) IBC Insulated Braided Cord PRUBIN Meticu- lous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse
OUT: ZES Square Lens ZER Round Lens	IN & OUT: 48 4' x 8' IN : 14 1' x 4' 24 2' x 4'	LED35 3500K LED4 4000K LED3- 90 90CRI LED35- 90 90CRI LED4- 90 90CRI	PROG Program- mable Light Output (Specify desired lm/ft or w/ft)								
UP: ZUS Square Lens ZUR Round Lens											
DOWN: ZDS Square Lens ZDR Round Lens											

VISIT PRULITE.COM FOR ALL SNAP SERIES SPECIFICATIONS






Bolt

SENSOR BOX



ADJOINING DETAIL



Snap

SENSOR BOX



NOTE: Adds 3" to length, ENL: enlightened control module required



NOTE: Adds 3" to length, ENL: enlightened control module required




NOTE: Adds 6" to fixture length in center of fixture, FSP - L2 or L3 lens only






NOTE: Small cut-out of lens around sensor, Surface mount on walls only




ADJOINING DETAIL



CORNERS



NOTE: All corners available S1 square only



Premium Colors



NO SET-UP FEES — QUICK LEAD TIMES



**YSW** – Seashell White (Matte)




**YCH** – Champagne (Metallic)



**YSL** – Silver (Metallic)



**YPE** – Pewter (Matte)



**YRG** – Rain Grey (Gloss)



**YSTM** – Storm Grey (Matte)



**YBK** – Interior Black (Matte)



**YBB** – Black (Semi-Gloss)



**YSKM** – Sky (Matte)



**YMB** – Military Blue (Matte)



**YIB** – Interstate Blue (Matte)



**YSAM** – Sapphire (Matte)




**YIG** – Ivy Green (Matte)



**YBR** – Bronze (Matte)



**YBY** – Boysenberry (Matte)



**YSRM** – Sunset Red (Matte)



**YOR** – Orange (Matte)



**YDAM** – Daffodil (Matte)

Please note that as of May 1<sup>st</sup>, 2017 the following colors have been changed to matte finishes; YSTM, YSKM, YFGM, YSRM, YDAM. To match a previous order with a glossy finish please remove the 'M', e.g. 'YST' instead of 'YSTM.'

For paint chip samples, please email: [info@prulite.com](mailto:info@prulite.com)







**FIXTURE** | Zenith Up

**CLIENT** | Georgia United Credit Union

**ARCHITECT** | Warner Summers Architecture

**PHOTOGRAPHER** | Jim Roof

Products  
Made in America **USA**



**PRUDENTIAL LTG.**

LA made. Nationally admired. Since 1955.

1774 East 21<sup>st</sup> Street  
Los Angeles, CA 90058

352 7<sup>th</sup> Avenue, 12th Floor  
New York, NY 10001

**TEL** 213.746.0360  
**FAX** 213.741.8590

**TEL** 908.658.4231

**URL** prulite.com  
**EMAIL** info@prulite.com