

even more...
delightful

Part
TWO





STREAM DOTS FOR OPEN CEILINGS AND SO MUCH MORE.

Initially launched as a breakthrough in linear illumination, Stream's intriguing 'Veiled Ambient' genre has expanded to include Stream Dot architectural accent 'downlights' and now introducing Stream Dot Pendants.

Stream's 'Veiled Ambient' illumination is designed to be experienced – photography doesn't do it justice – its 'barely there' presence radiates wondrously uniform light from every angle. Nuanced, and understated, our Stream Series is ideal for commercial and residential projects where the ultimate goal is to enable the beauty of the architecture to shine.






SQUARE

Up to 104 lm/w,
Ceiling Wash optic,
linear superstar.



SQUARE REMOTE

Sleeker remote driver
design with same optics.

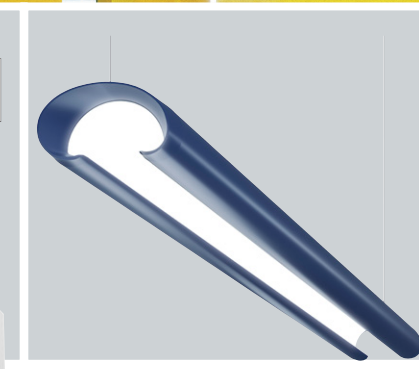

OVAL

Absolutely stunning
linear pendant.




STREAM2

2" aperture addition
to our original
recessed Stream.




STREAM4

Industry-first
recessed linear veiled
source ambient.

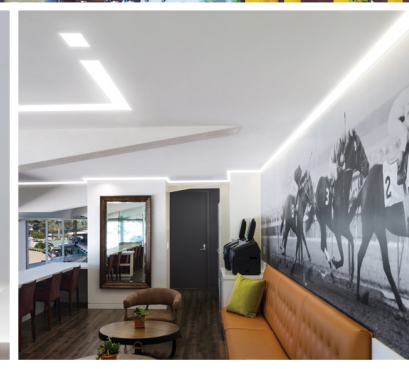


PERIMETER 4"

Asymmetric distribution,
veiled source,
seamless appearance.

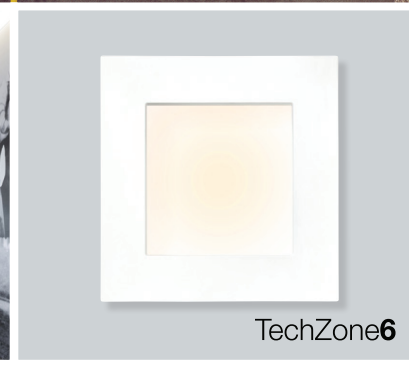

DOT SQUARE

Veiled ambient 4" accent
stands alone or works in the
context of a graphic pattern.

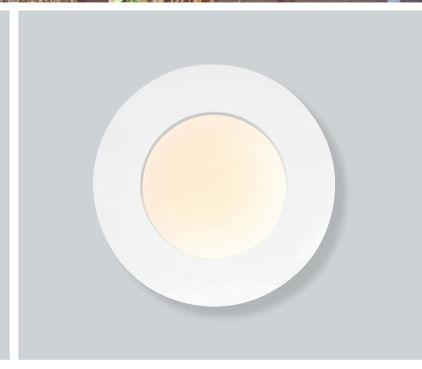

DOT ROUND

Signature Stream glow in
a 4" round for commercial
or residential applications.





STREAM DOT PENDANT

Square

Soft glow with a modern edge.

In keeping with Stream’s signature subtlety, the Square Dot Pendant adds a simple, geometric element of design. Projecting a soft, pumpkin shaped distribution of light, it’s an accent piece that ties in with the entire Stream Series or stands on its own. Thick (frosted or clear) or thin Top Glows offer a range of uplight enhancements including seven brightly colored acrylics.



UP TO 85 LM/W				
	LO	MO	SO	HO
DOWN	304	412	761	990
W	5	6.3	11.8	16.5
DOWN / UP				
lm	775	1008	1800	2150
W	9.7	11.9	26	34
UP-DDC				
lm	428	546	1013	1160
W	5.6	6.8	14	18

SDP-LED35-MO/MO-DDC

1008 Delivered Lumens

12 Watts

81 lm/w

3500 CCT

SE-RIES	SIZE	LED COLOR	OUTPUT UP/DOWN	UPLIGHT	TG1: TOP GLOW COLOR	FIXTURE COLOR	CIRCU-ITING	VOLT-AGE	MOUNTING	ELECTRI-CAL COVER	CANOPY COLOR	CEILING SYSTEMS	DRIVERS	OP-TIONS
SDP Square Dot Pen- dant	4 4 3/4"	LED27 2700K, 90 CRI	LO Low (Matches 4" recessed SO)	NU No Uplight	SKIP COLUMN IF TG1 IS NOT SPECIFIED	TMW Textured Matte White (Standard)	SC Single Circuit	UNV (120-277) 347	SSC Top-Swivel Stem Mount (Specify length, consult factory for stems longer than 8', minimum 6')	EBCP1G Single Gang (Electrical Box Cover Plate/ Mud Ring)	TMW Textured Matte White (Standard)	X1 T-Bar' On Tee' Pendant	ND Non-Dimming DM01 0-10v, 1% Dimming (Osram Standard for 0-10V)	EML Emergency Battery (EML not available in certain configurations, Remote only) NOTE: RTK kit required
	6 6 1/2"	LED3 3000K, 90 CRI	MO Medium (Matches 4" recessed HO)	DDC* Diffused	CLER Clear (Standard)	YGW Gloss White							XTP T-Bar' Off Tee' Pendant	
	9 9"	LED35 3500K, 90 CRI	SO Standard	TG1* Thin 1/8" Top Glow Frosted (SPECIFY TG1 COLOR IN NEXT COLUMN =>)	SNSH Sunshine	YSW Seashell White (Premium color)				EBCP2G Dual Gang (Electrical Box Cover Plate/ Mud Ring)	YGW Gloss White	X3 Hard Ceiling Pendant	LDE5* 5-Series EcoSystem LED	NOTE: RTK kit required
		LED4 4000K, 90 CRI	HO High (HO not recommended for wall mount, NA 4" direct/ indirect)	TG2F* Thick 3/8" Top Glow Frosted	MAND Mandarin	Y Premium Color							1% EcoSystem LED (Soft fade on, fade-to-black dimming) * SO and HO only	
			PROG Program-mable Light Output (Specify desired lumen or watts) NOTE: 4" Same Down/Up NA HO DM01, NA SO/HO LDE, Eldo	TG2P* Thick 7/8" Top Glow Polished	STRW Strawberry	CC Custom Color			(SPECIFY EBCP1G / 2G =>)		Y Premium Color	EXCP Exposed Conduit Ceiling	ECO 1% 0-10v, EldoLED (Loga-rithmic dimming std)	ADC Acrylic Dust Cover (Uplight optional, ships installed)
				SUP Surface Mount Uplight (LO only) *NA SUR	LBLU Light Blue				SUR Surface Mount (Uplight, LO only, 1/2" standoff mandatory)		CC Custom Color		ECDA 1% DALI, EldoLED (Loga-rithmic dimming std)	PRUBIN Meticu-lous Bin-ning and Labeling every LED Board within a 2-Step Mac-Adams Ellipse
				NOTE: All up-light options include dust cover	LGNA Laguna				SWM† Sconce Wall Mount				SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Loga-rithmic dimming std)	
					GRAS Grass				SWME† Sconce Exposed Conduit Wall Mount				SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	
					KIWI Kiwi				NOTE: To wall mount hori-zontally, specify SUR and X3, 4" only † Wall sconce is only available at 6" and 9"					



STREAM DOT PENDANT

Round

Radiant light in cylinder pendant.

The sleek, minimalist Round Stream Dot Pendant offers a slightly softer look, complementing other design elements within the space. Thick (frosted or clear) or thin Top Glows offer a range of uplight enhancements including seven brightly colored acrylics.



UP TO 84 LM/W				
DOWN	LO	MO	SO	HO
lm	335	429	797	927
w	5.6	6.8	14	18
DOWN / UP				
lm	800	1047	1850	2100
w	10	12.5	27	35
UP-DDC				
lm	428	546	1013	1160
w	5.6	6.8	14	18



RDP-LED35-MO/MO-DDC	
1047	Delivered Lumens
13	Watts
84	lm/w
3500	CCT

SE-RIES	SIZE	LED COLOR	OUTPUT UP/DOWN	UPLIGHT	TG1: TOP GLOW COLOR	FIXTURE COLOR	CIRCU-ITING	VOLT-AGE	MOUNTING	ELECTRI-CAL COVER	CANOPY COLOR	CEILING SYSTEMS	DRIVERS	OPTIONS
RDP Round Dot Pen-dant	4 4¾"	LED27 2700K, 90 CRI	LO Low (Matches 4" recessed SO)	NU No Uplight	SKIP COLUMN IF TG1 IS NOT SPEC-IFIED	TMW Textured Matte White (Standard)	SC Single Circuit	UNV (120-277)	SSC Top-Swivel Stem Mount (Specify length, consult factory for stems longer than 8'; minimum 6")	EBCP1G Single Gang (Electri-cal Box Cover Plate/Mud Ring)	TMW Textured Matte White (Standard)	X1 T-Bar' On Tee' Pendant	ND Non-Dimming	EML Emergen-cy Battery (EML not available in certain configura-tions, Remote only)
	6 6⅞"	LED3 3000K, 90 CRI	MO Medium (Matches 4" recessed HO)	TG1* Thin ⅛" Top Glow Frosted (SPECIFY TG1 COLOR IN NEXT COLUMN ⇒)	CLER Clear (Standard)	YGW Gloss White		347	STC48, 96, 144 Stem/Cord	EBCP2G Dual Gang (Electrical Box Cover Plate/ Mud Ring)	YGW Gloss White	XTP T-Bar' Off Tee' Pendant	DM01 0-10v, 1% Dimming (Osram Standard for 0-10V)	NOTE: RTK kit required
	9 9"	LED35 3500K, 90 CRI	SO Standard		SNSH Sunshine	YSW Seashell White (Premium color)			(SPECIFY EB-CP1G / 2G ⇒)		YSW Seashell White (Premium color)	X3 Hard Ceiling Pendant	LDE5* 5-Series EcoSystem LED	ADC Acrylic Dust Cover (Uplight standard. Downlight optional, ships installed)
		LED4 4000K, 90 CRI	HO High (HO not rec-ommended for wall mount, NA 4" direct/ indirect)	TG2F* Thick ⅞" Top Glow Frosted	MAND Mandarin	Y Premium Color			SUR Surface Mount (Uplight, LO only, ½" stand-off mandatory)		Y Premium Color	EXCP Exposed Conduit Ceiling	LDE1* Hi-Lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)	PRUBIN Meticu-lous Bin-ning and Labeling every LED Board within a 2-Step Mac-Adams Ellipse
			PROG Program-mable Light Output (Specify desired lumen or watts)	TG2P* Thick ⅞" Top Glow Polished	STRW Straw-ber-ry	CC Custom Color			SWM† Sconce Wall Mount		CC Custom Color		ECO 1% 0-10v, EldoLED (Logarithmic dimming std)	
			NOTE: 4" Same Down/Up	SUP Surface Mount Uplight (LO only)	LBLU Light Blue				SWME† Sconce Exposed Conduit Wall Mount				ECDA 1% DALI, EldoLED (Logarithmic dimming std)	
			NA HO DM01, NA SO/HO LDE, Eldo	NOTE: All uplight op-tions include dust cover	LGNA Laguna				NOTE: To wall mount horizontally, specify SUR and X3, 4" only				SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	
					GRAS Grass				† Wall sconce is only available at 6" and 9"				SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	
					KIWI Kiwi									

Premium Colors

NO SET-UP FEES — QUICK LEAD TIMES

YSW – Seashell White (Matte)

YCH – Champagne (Metallic)

YSL – Silver (Metallic)

YPE – Pewter (Matte)

YRG – Rain Grey (Gloss)

YSTM – Storm Grey (Matte)

YBK – Interior Black (Matte)

YBB – Black (Semi-Gloss)

YSKM – Sky (Matte)

YMB – Military Blue (Matte)

YIB – Interstate Blue (Matte)

YSAM – Sapphire (Matte)

YFGM – Forest Green (Matte)

YBR – Bronze (Matte)

YBY – Boysenberry (Matte)

YSRM – Sunset Red (Matte)

YOR – Orange (Matte)

YDAM – Daffodil (Matte)

For paint chip samples, please email: info@prulite.com

TG1 — THIN 1/8" FROSTED TOP GLOW

CLEAR
(CLER, STANDARD COLOR)

SUNSHINE
(SNSH)

MANDARIN
(MAND)

STRAWBERRY
(STRW)

LIGHT BLUE
(LBLU)

LAGUNA
(LGNA)

GRASS
(GRAS)

KIWI
(KIWI)


TG2 — THICK 7/8" TOP GLOW

TG2P: POLISHED TOP GLOW


TG2F: FROSTED TOP GLOW

TG1: THIN FROSTED TOP GLOW


EXPLODED VIEW

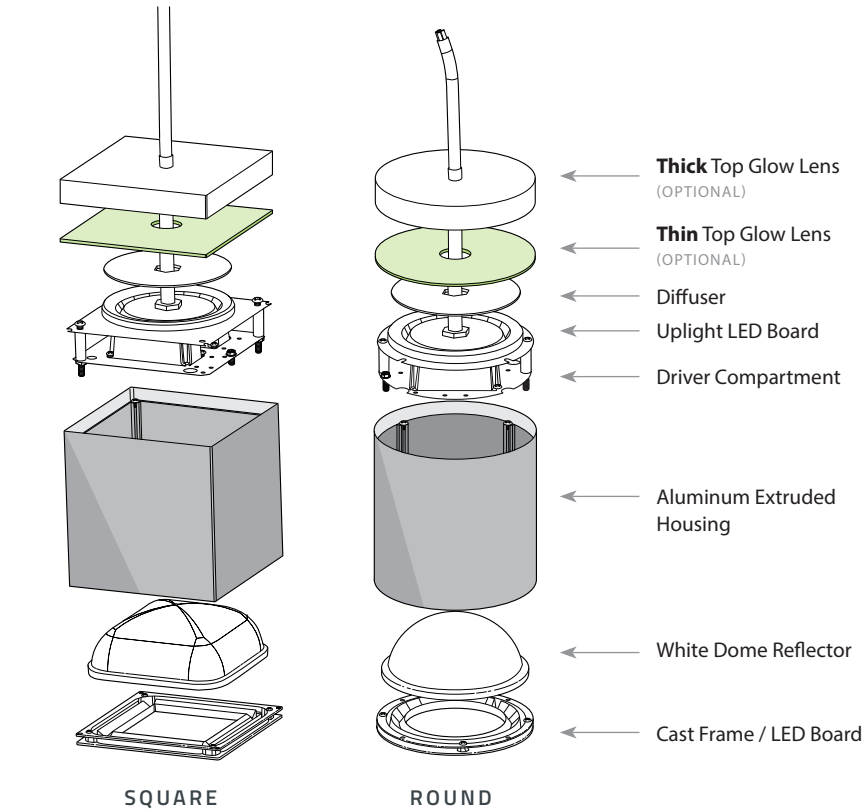


CROSS SECTIONS

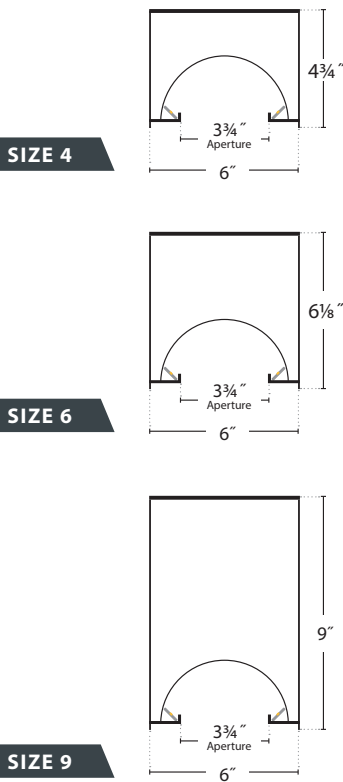


STEM / CABLE

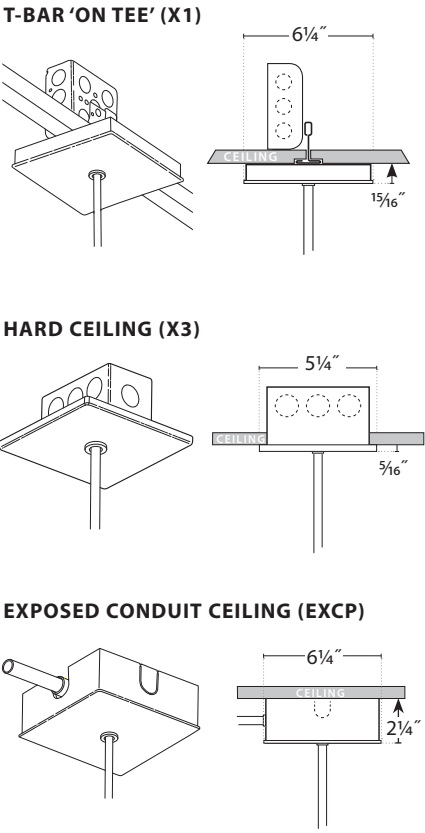

SURFACE

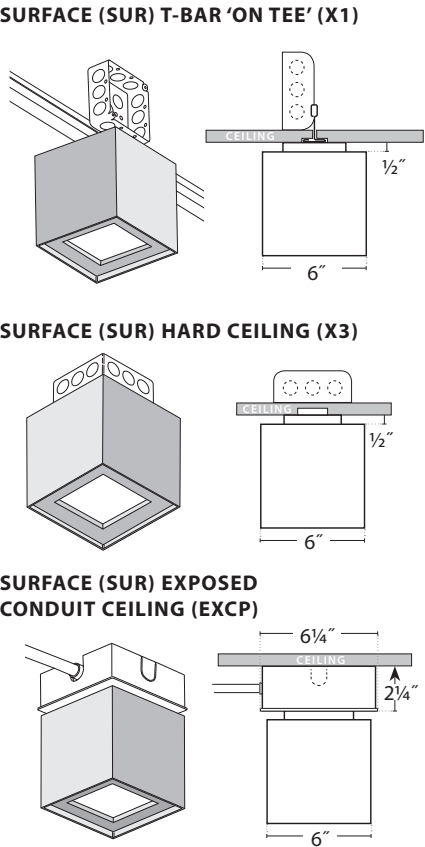

WALL

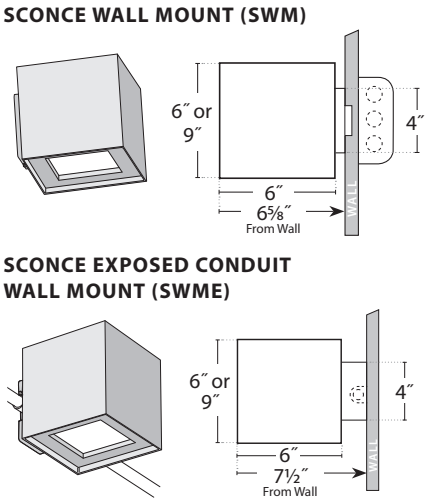



Products
Made in America **USA**



PRUDENTIAL LTG.

LA made. Nationally admired. Since 1955.

1774 East 21st Street
Los Angeles, CA 90058

352 7th Avenue, 12th Floor
New York, NY 10001

TEL 213.746.0360
FAX 213.741.8590

TEL 908.658.4231

URL prulite.com
EMAIL info@prulite.com