

# Snappro + BoltPro Series

Erector set functionality, architectural aesthetics

flexible

NOW UP TO  
**1600**  
LUMENS/FT





Photo rendering modification of existing Prudential Ltg. project



### SNAP AND BOLT GET AN UPGRADE.

The versatile Snap Series now “SnapPro, BoltPro, etc.” has vastly improved lumen output and efficacies (up to 144 lm/w), JA8 certification and an abundance of sensor options. Upgrade to Bolt for a sleek aesthetic and fully lit triangles, pentagons, hexagons or make your own patterns and don't forget Snap Flair as a great utility fixture for classrooms, corridors and stairwells.

# Snappro + BoltPro Series

Erector set functionality, architectural aesthetics



## SNAPPRO SERIES

# BoltPro

**Our Snap Series set the bar high – Bolt kicks it up yet another notch.**


No longer constrained to 1' increments, Bolt is offered in nearly infinite configurations, any row length with fully illuminated corners allowing a wide range of shapes while providing new tools for creating an endless array of fully illuminated graphic patterns. Now available Side Mounted for huge Bolt. In triangles, rectangles or whatever you can dream up (within reason).

NOW OVER  
**1400**  
LUMENS/FT




“Snap has been a ‘go-to’ for years, Bolt takes it to the next level with fully lit patterns.”

— HEATHER LIBONATI, LUMINESCE DESIGN

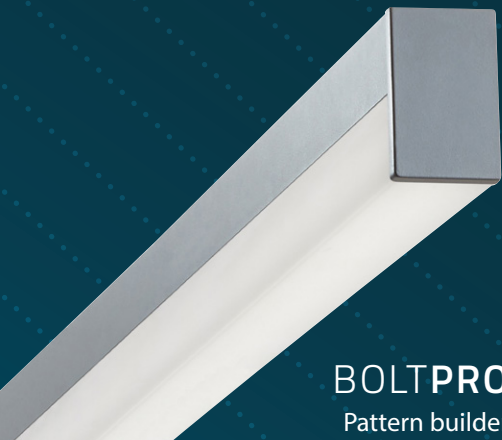

**BOLTPRO**  
Pattern builder

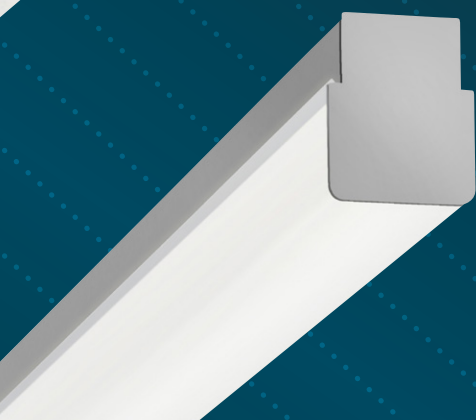


**SNAPPRO SQUARE**  
Satin or white acrylic



**SNAPPRO ROUND**  
Satin or linear prismatic  
for stack lighting

COMPARISON


	SNAPPRO	VS.	BOLTPRO
<b>CORNERS</b>	Unlit 90° & 135° 2-3-4 Way		Lit 45° - 180° 2-3-4 Way
<b>LENGTH</b>	1' Increments		1/16" Increments
<b>SENSORS</b>	Adds 3" section to end of individual or row		Integrated No extra length required
<b>HOUSING</b>	Steel		Extruded aluminum
<b>ENDCAPS</b>	Stamped		Cast

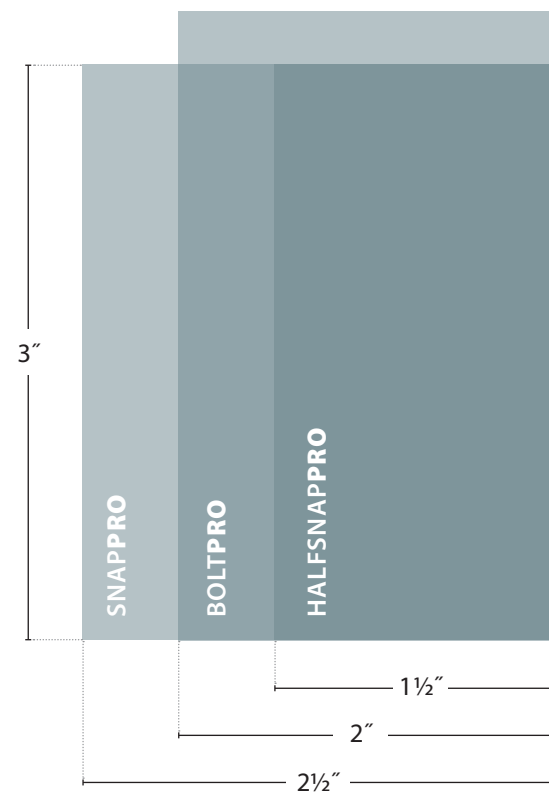


— Actual Sizes

BOLTPRO


Lit Corners in 1° Increments

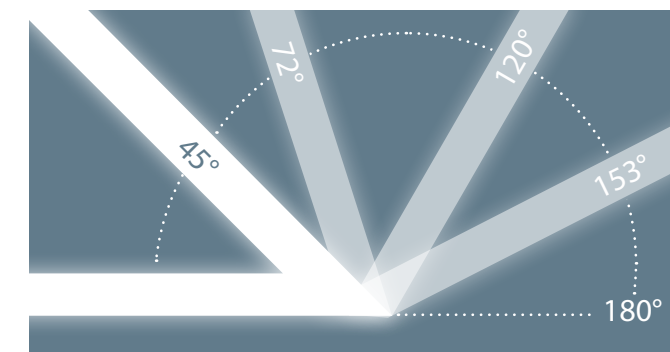

Integrated Sensors in all Shapes

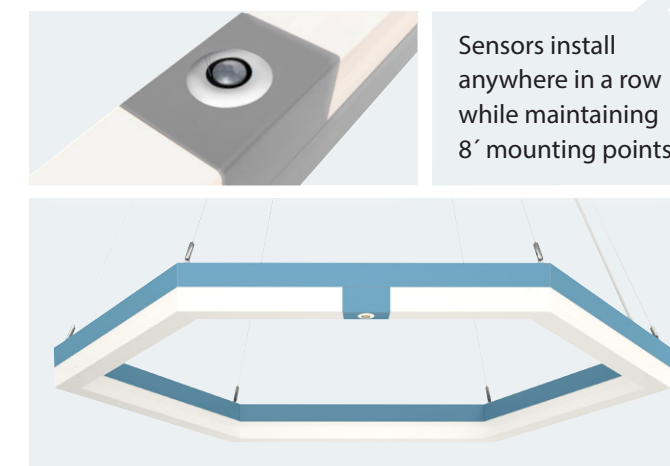


Sensors install  
anywhere in a row  
while maintaining  
8' mounting points

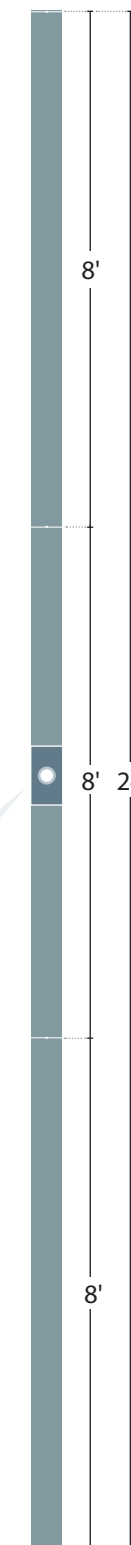

**SNAPPRO AERO**  
Retro style



**SNAPPRO FLAIR**  
Linear or stairwells

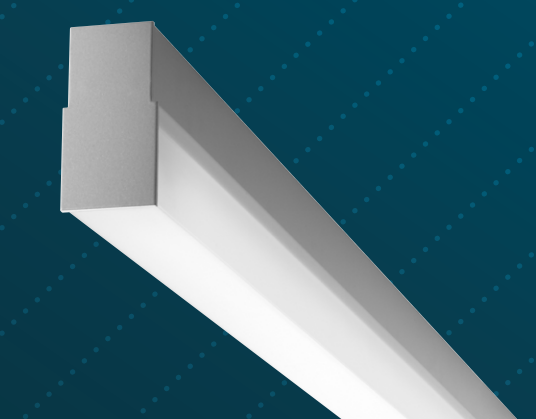


**HALFSNAPPRO**  
Square or round lens




# Bolt Shapes

**Working all the angles.** Forgettable these shapes are not. Angular and distinctive, they command attention wherever they go, and they can go pretty much anywhere. In entries and social spaces, open and private offices, corridors and stairwells, Bolt in any form is a highly adaptable luminaire.

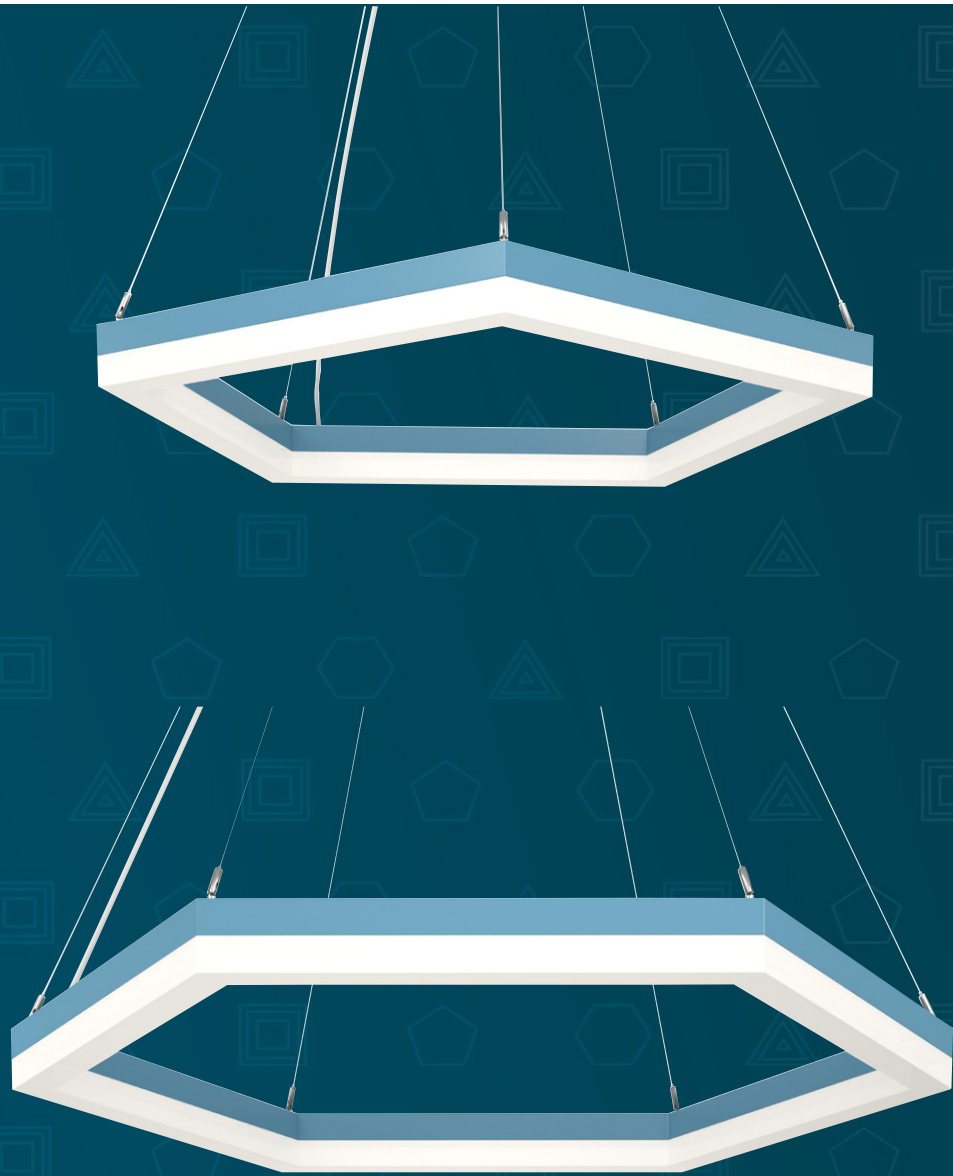


PENTAGON  
41" Diameter

HEXAGON  
50" Diameter

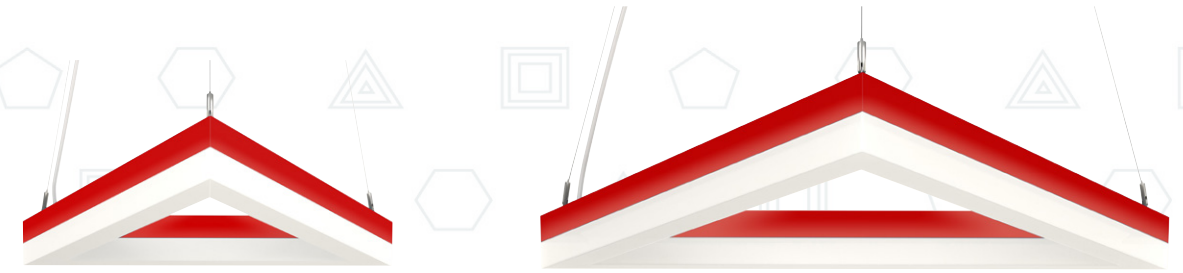

TRIANGLE  
2', 3' & 4'

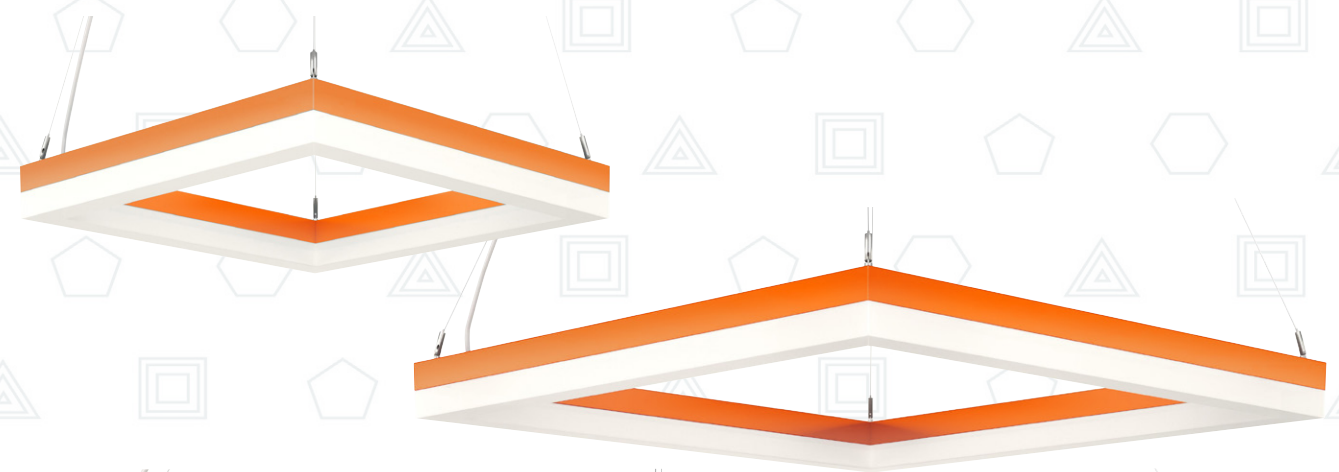

SQUARE  
2', 3' & 4'





Photo rendering


## SNAPPRO SERIES

# BoltPro


### Snap's sleeker, more sophisticated sibling.

Linear, yes. But Bolt is so much more. Basic but not boring, it's an infinitely flexible, sleek architectural wrap – available in any row length ( $\frac{1}{16}$ " increments) and a multitude of lit corners, including unique side-mounting patterns.

**Bolt is now available in a horizontal configuration for oversized rectangles over conference tables (with light aimed In or Out like Zenith) or giant triangles or pentagons.**

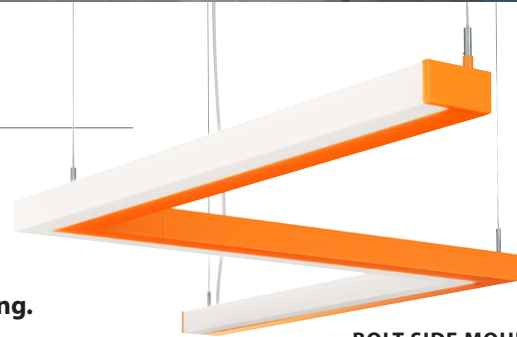

**BOLT SIDE MOUNT**  
See BoltPro Side Mount spec sheet for details



**JA8**  
TITLE 24

### NEW HIGHER LUMEN LEVELS

UPTO **131** LM/W


	LO	MO	SO	HO
lm/ft	490	825	1140	1425
w/ft	3.75	6.5	9.4	12.5

BOLT-PRO-LED35-LO-SAL	
1962	Delivered Lumens
15	Watts
131	lm/w

SE-RIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/ FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS				
BOLT-PRO	LED27 2700K (90CRI)	LO Low	2' 3'	SAL Satin Acrylic Lens	TMW Textured Matte White	UNV (120- 277)	SUR Surface or Wall Mount	X1 T-Bar $\frac{1}{16}$ " or $\frac{1}{16}$ " (Standard) Consult factory for $\frac{1}{16}$ " Tegular	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard)	EMHE CA T20 Emergency Battery (1350 Delivered lumens; CA Title 20 compliant; 4' or longer)				
	LED3 3000K	MO Medi- um	4' 5'								CA48", 96" & 144"	LDE5 Lutron 5-Series EcoSystem LED	ETS-DR Iota ETS-DR Emergency Transfer Switch EBCP1G/2G Single/ Dual Gang (Electrical Box Cover Plate/Mud Ring)	
	LED35 3500K	SO Stan- dard	6' 7'								(Emergency battery requires a Step Down trans- former)	LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to- black dimming)	JA8 90 CRI, ECO 30W Driver Only (Consult factory for pricing)	
	LED4 4000K	HO High	8' R (Row length to $\frac{1}{16}$ "								X3 Hard Ceiling	ECO 1% 0-10v, EldoLED (Logarithmic dimming std)		
	LED3- 90 90CRI	PROG Pro- gram- ma- ble	SRL Symmetric Row Length (See page 5.)								X6 Slot Grid or Interlude	ECDA 1% DALI, EldoLED (Logarithmic dimming std)	SENSORS: 205-ON/OFF WattStopper PIR Occupancy (No power to fixture)	
	LED35- 90 90CRI	Light Out- put (Specify desired lm/ft or w/ft)	Row lengths are typically made up of 8" and 4" fixtures, (eg. 12" row is (1) 8" and (1) 4"), unless SRL Symmetric Row Lengths are spec'd									SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	205-DM WattStopper PIR Occupancy (Sets to min. dimming level)	
	LED4- 90 90CRI		<b>NOTE:</b> Individual fixtures are NOT intended for row mounting									SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	LUX Phillips DL LVOC Lutron Vive (Occ & RF)	
	LED5- 90 90CRI		<b>NOTE:</b> For Patterns, Specifiers may write in 'Pattern' and include a drawing with corners and dimensions										LVRF Lutron Vive (RF Only)	
													ENL Enlighted SU-5E-IOT	NXSMP Hubbell (Occ)
														CORNERS: C2 Lit 2-Way C3T Lit 3-Way 90°: T C3Y 120° Lit 3-Way: Y C4 Lit 4-Way 90° Cross

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS



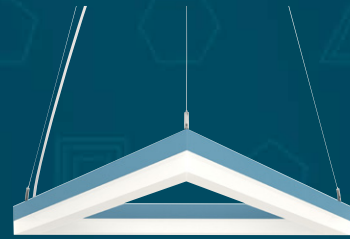


TRIANGLE  
2', 3' & 4'



SQUARE  
2', 3' & 4'



PENTAGON  
41" Diameter

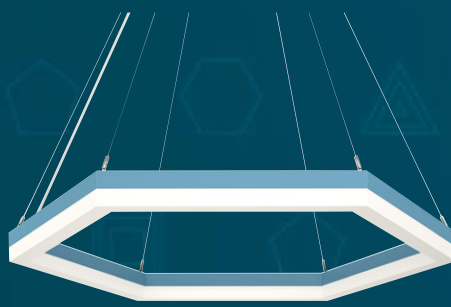

HEXAGON  
50" Diameter



Photo rendering modification of existing Prudential Ltg. project

## SNAPPRO SERIES

# BoltPro Shapes

**Working all the angles.** Combinable sizes, shapes and colors for complex patterns, these geometric angles inspire, giving architects and lighting designers new fodder for thought. See Bolt linear to build larger triangles, rectangles or a myriad of other shapes.



SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELDING	COLOR/ FINISH	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS
BTRI- PRO Bolt Pro Triangle	22 2' x 2' x 2'	LED27 2700K (90CRI)	LO Low	SAL Satin Acrylic Lens	TMW Textured Matte White	UNV (120-277)	3PTM (BTRI) Round / Square Cast Alumi- num Canopy (Min from fixture to ceiling 2':14", 3': 22", 4': 30")	X1 T-Bar 1 5/16" or 3/16" Exposed (Standard)	ND Non-Dimming	EMHE CAT20 Emergency Battery (1350 Delivered lumen; CA Title 20 compliant)
	33 3' x 3' x 3'	LED3 3000K	MO Medium	Y Gloss White (Standard)	Y Premium Color	347 (Emergen- cy battery requires a Step Down transform- er)	4RPM / SPM 48", 96" or 144" (BSQ) Round / Square Cast Aluminum Canopy (Min from fixture to ceiling 2':14", 3':22", 4': 30")	X3 Hard Ceiling	DM01 0-10v, 1% Dimming (Standard)	ETS-DR Iota ETS-DR Emergency Transfer Switch
	44 4' x 4' x 4'		SO Standard						DM10 0-10v, 10% Dimming	
BSQ- PRO Bolt Pro Squar	22 2' x 2'	LED35 3500K	HO High						PROG Pro- gramma- ble Light Output (Specify desired lm/ft or w/ft)	
BPEN- PRO Bolt Pro Pentagon	33 3' x 3'	LED4 4000K				6RPM / SPM 48", 96" or 144" (BHEX) Round / Square Cast Aluminum Canopy (24" min from fixture to ceiling)		ECO 1% 0-10v, EldoLED	ECO 1% 0-10v, EldoLED	205-DM WattStopper PIR Occupancy (Sets to min. dimming level)
BHEX- PRO Bolt Pro Hexagon	44 4' x 4'	LED35- 90 90CRI				CA48", 96" or 144" Aircraft Cable (Adjustable)		SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	ENL Enlighted SU-5E-IOT
	22 2' x 2' x 2' 2' x 2' x 2' 2' x 2' x 2' (50" Diameter)	LED4- 90 90CRI				SUR Surface or Wall Mount (Hard ceiling only)		SODA 0.1% DALI, EldoLED (Dim to Dark)	SODA 0.1% DALI, EldoLED (Dim to Dark)	LUX Phillips DL LVOC Lutron Vive (Occ & RF) LVRF Lutron Vive (RF Only) NXSMP Hubbell (Occ)

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS





SnapPro Square, 4-way Corner  
 CLIENT | AEP ARCHITECT | Design Collaborative




CLIENT | CSUN ARCHITECT | LPA Inc. LIGHTING DESIGNER | STUDIOK1


## SNAPPRO SERIES

# SnapPro

**Our basic lighting building block.** This perfectly scaled wrap simply snaps quickly, neatly and securely into a wide range of spaces. Excellent optical performance and integrated controls help make Snap both a linear and back-of-house dynamo. Our Linear Prismatic (LLP) lens turns Snap into an outstanding Stack fixture ideal for warehouses, manufacturing, libraries and more.

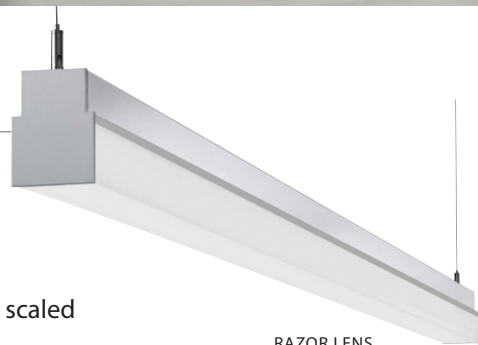

RAZOR LENS



JAB  
 TITLE 24

### NEW HIGHER LUMEN LEVELS

	LO	MO	SO	HO
<b>SAL:</b> lm/ft	540	920	1275	1625
<b>WA:</b> lm/ft	430	740	1030	1285
<b>LLP:</b> lm/ft	540	920	1275	1625
<b>w/ft</b>	3.75	6.5	9.4	12.5

<b>S1-LED35-LO-SAL</b>	2163	Delivered Lumens
	15	Watts
	144	lm/w

SE-RIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS	
R1-Pro Round	LED27 2700K (90CRI)	LO Low	2' 3'	SAL Satin Acrylic Lens (JAB Title 24 compliant)	TMW Textured Matte White	UNV (120-277)	SUR Surface or Wall Mount	X1 T-Bar 1 1/2" or 3/4" Exposed (Standard) Consult factory for 3/4" T-Bar	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard)	EMHE Emergency Battery (1350 Delivered lumens, CA Title 20 compliant, 4' or longer)	TRS Tamper-Resistant Screws EBCP1G/2G Single/ Dual Gang (Electrical Box Cover Plate/Mud Ring) JAB 90 CRI, ECO 30W Driver Only (Consult factory for pricing)
S1-Pro Square	LED3 3000K	MO Medium	4' 5'	WA White Acrylic Lens (NA RZ-Pro)	Y Premium Color	347 (Emergency battery requires a Step Down transformer)	CA48", 96" or 144" Aircraft Cable (Adjustable)	X3 Hard Ceiling X6 Slot Grid or Interlude	LDE5 Lutron 5-Series EcoSystem LED LDE1 Lutron Hi-lume 1% Eco-System LED (Soft fade on, fade-to-black)	ETS-DR Iota ETS-DR Emergency Transfer Switch EMC Emergency Circuiting	505* WattStopper Ultrasonic Occupancy (SUR on wall mount only) 505-STEP: Dim to 50% 505-DM: Dim to 1% LUX Phillips DL ENL Enlighted SU-5E-IOT LVOC Lutron Vive (Occ & RF) LVRF Lutron Vive (RF Only) NXSMF Hubbell (Occ) * NA < 4'. Sensor off center for 6' or 8' fixtures
RZ-Pro Razor Sharp Edged Lens	LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI LED5-90 90CRI	SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	6' 7' 8' R (Row length in 1" increments) SRL Sym-metric Row Length (Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are specified NOTE: Individual fixtures are NOT intended for row mounting	LLP Linear Prismatic Acrylic Lens for LED (Stack optics, R1 Only) NOTE: All canopies are painted the same color as the fixture. Consult factory to specify	CC Custom Color			ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	205-ON/OFF WattStopper PIR Occupancy (No power to fixture) 205-DM WattStopper PIR Occupancy (Sets to min. dimming level) 211-FSP* WattStopper DLH & Infrared Occupancy 211-FSP-L2: 8' Mtg. Height, 48" Dia. Coverage 211-FSP-L3: 20' Mtg. Height, 40" Dia. Coverage (Adds 6" to fixture length)	CORNERS: C2 Unlit 90° 2-Way C2-120 Unlit 120° 2-Way C3 Unlit 90° 3-Way	C3-120 Unlit 120° 3-Way C4 Unlit 90° 4-Way All corners available S1 and RZ only

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS







Snap Flair Pro  
 CLIENT | Warroad High School & Early Learners Center, MN ARCHITECT | Architectural Resources, Inc

**CLASSROOM**


25	30	26	19	19	26	30	25
37	47	38	24	24	38	47	37
44	55	45	29	29	45	55	44
46	59	48	31	31	48	59	46
47	59	48	31	31	48	59	47
44	56	45	29	29	45	56	44
38	48	39	25	25	39	48	38
26	32	27	19	19	27	32	26

30' x 30' x 9' (2) 24' rows hung 1' below ceiling  
 FC at working plane Max/Min: 2.5 .37 w/sq. ft.

SNAPPRO SERIES

FlairPro

**Classroom and stairwell or corridor workhorse.**  
 The hard-working Flair blends the best of our Snap Series and Wal14, with a gentle, sweeping bell curve shape. Understated and utilitarian with a touch of style. It works well as a linear pendant for classrooms, cafeterias, auditoriums, stairwells or just about any utility interior. Complete with integrated motion sensors for maximum energy efficiency.



**NEW HIGHER LUMEN LEVELS**

UP TO **126** LM/W

	LO	MO	SO	HO
lm/ft	500	850	1180	1475
w/ft	4.5	7	10	12

**FLAIR-PRO-LED35-SO-SAL**

4728	Delivered Lumens
37	Watts
126	lm/w

SE-RIES	LED COLOR	OUT-PUT	NOMINAL LENGTH	SHIELD-ING	COLOR/FINISH	VOLT-AGE	MOUNT-ING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS
FLAIR-PRO Snap-Pro-Flair	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic (WA Lens N/A)	TMW Textured Matte White	UNV (120-277)	SUR Surface or Wall Mount	X1 T-Bar 1 1/16" or 9/16"	ND Non-Dimming	EMHE CA T20 Emergency Battery (1350 Delivered lumens; CA Title 20 compliant; 4' or longer)
	LED3 3000K	MO Medium	3'							
	LED35 3500K	SO Standard	4'							
	LED4 4000K	HO High	5'							
	LED3-90 90CRI	PROG Programmable Light Output (Specify desired lm/ft or w/ft)	6'							
LED4-90 90CRI		7'	R (Row length in 1' increments)	Y Premium Color	347 (Emergency battery requires a Step Down transformer)	CA48", 96" or 144" Aircraft Cable (Adjustable)	X3 Hard Ceiling	DM01 0-10v, 1% Dimming (Standard)	ETS-DR Iota ETS-DR Emergency Transfer Switch	
LED5-90 90CRI		8'	SML Sym-metric Row Length	CC Custom Color			X6 Slot Grid	LDE5 Lutron 5-Series EcoSystem LED	EBCP1G / 2G Single / Dual Gang (Electrical Box Cover Plate/ Mud Ring)	
			Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd	NOTE: All canopies are painted the same color as the fixture. Consult factory to specify				LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)	TRs Tamper-Resistant Screws	
			NOTE: Individual fixtures are NOT intended for row mounting					ECO 1% 0-10v, EldoLED (Logarithmic dimming std)	SENSORS: 205-ON/OFF WattStopper PIR Occupancy (No power to fixture)	
								ECDA 1% DALI, EldoLED (Logarithmic dimming std)	205-DM WattStopper PIR Occupancy (Sets to min. dimming level)	
								SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	LUX Phillips DL	
								SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	ENL Enlighted SU-5E-IOT	
									LVOC Lutron Vive (Occ & RF)	
									LVRf Lutron Vive (RF Only)	
									NXSMP Hubbell (Occ)	
									505 WattStopper Ultrasonic Occupancy (SUR on wall mount only)	
									505-STEP: Dim to 50%	
									505-DM: Dim to 1%	
									NOTE: NA <4' Sensor off center for 6' or 8' fixtures	

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS





## SNAPPRO SERIES


# AeroPro

**Sleek and streamlined with a touch of retro style.** Minimalist and Machine age-inspired, this aerodynamic spin on our ever-popular Snap offers a subtle retro nod without being 'themey.'



### NEW HIGHER LUMEN LEVELS

UP TO <b>134</b> LM/W				
	LO	MO	SO	HO
lm/ft	540	920	1275	1625
w/ft	3.75	6.5	9.4	12.5



**AERO-PRO-LED35-SO-SAL**

5024 Delivered Lumens

38 Watts

134 lm/w

SERIES	LED COLOR	OUTPUT	NOMINAL LENGTH	SHIELDING	COLOR/FINISH	VOLTAGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & SENSORS		
AE-RO-PRO Snap-Pro-Aero	LED27 2700K (90CRI)	LO Low	2'	SAL Satin Acrylic (WA Lens N/A)	TMW Textured Matte White	UNV (120- 277)	SUR Surface or Wall Mount	X1 T-Bar 1 1/16" or 9/16" X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE5 Lutron 5-Series EcoSystem LED LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE CA T20 Emergency Battery (1350 Delivered lumens; CA Title 20 compliant; 4' or longer) ETS-DR Iota ETS-DR Emergency Transfer Switch EMC Emergency Circuiting TRS Tamper-Resistant Screws EBCP1G/2G Single/ Dual Gang (Electrical Box Cover Plate/Mud Ring)  <b>SENSORS:</b> 205-ON/OFF WattStopper PIR Occupancy (No power to fixture) 205-DM Watt- Stopper PIR Occupancy (Sets to min. dimming level) LUX Phillips DL ENL Enlighted SU-5E-IOT LVOC Lutron Vive (Occ & RF)		
	LED3 3000K	MO Medium	4'								347 (Emer- gency battery requires a Step Down trans- former)	CA48", 96" or 144" Aircraft Cable (Adjustable)
	LED35 3500K	SO Standard	5'								Y Gloss White (Standard)	
	LED4 4000K	HO High	6'								Y Premium Color	
	LED3- 90 90CRI	PROG Pro- gram- mable Light Output (Specify desired lm/ft or w/ft)	7'								CC Custom Color	
	LED35- 90 90CRI		8'								<b>NOTE:</b> All canopies are painted the same color as the fixture, specify canopy color after fixture (i.e. YPE- TMW for white canopies)	
	LED4- 90 90CRI		R (Row length in 1' increments)									
	LED5-90 90CRI		SML Symmetric Row Length									
			Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4', unless SRL Symmetric Row Lengths are spec'd									
			<b>NOTES:</b> Individual fixtures are NOT intended for row mounting									

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS





FIXTURES | Zenith Out CLIENT & ARCHITECT | LPA Architects, San Jose, CA



CLIENT | Masko



FIXTURE | Snap CLIENT | Alterra, Provo, UT DESIGNER | Rapt Studio



CLIENT | TRIS3CT ARCHITECT | Gary Lee Partners




CLIENT | Monster Energy ARCHITECT | H. Hendy Associates PHOTOGRAPHER | Sherman Takata

## SNAPPRO SERIES

# HalfSnapPro

A designer minimalist go-anywhere, do-anything wrap.

A more slender variation on Snap often utilized in graphic patterns, and coveted for its small stature and clean lines.



### NEW HIGHER LUMEN LEVELS

UP TO **138** LM/W

	LO	MO	SO	HO
lm/ft	515	880	1200	1550
w/ft	3.75	6.5	9.4	12.5

**Low Output:**  
HSS-PRO-LED35-LO-SAL  
2067 Delivered Lumens  
15 Watts  
138 lm/w

NOW UP TO  
**1600**  
LUMENS/FT

SERIES	LED COLOR	OUTPUT	NOMINAL LENGTH	SHIELDING	COLOR/ FINISH	CIRCUITING	VOLTAGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS, SENSORS & CORNERS
HSS-PRO Square	LED27 2700K (90CRI)	LO Low	2' 3'	SAL Satin Acrylic Lens	TMW Textured Matte White	SC Single Circuit	UNV (120-277)	SUR Surface or Wall Mount (Standard)	X1 T-Bar 1 5/16" or 3/4" Exposed (Standard) Consult factory for 3/4" Tegular	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE5 Lutron 5-Series EcoSystem LED	EMHE CA T20 Emergency Battery (1350 Delivered lumens; CA Title 20 compliant; 4' or longer) ETS-DR Iota ETS-DR Emergency Transfer Switch EBCP1G/2G Single/ Dual Gang (Electrical Box Cover Plate/Mud Ring) JAB 90 CRI, ECO 30W Driver Only (consult factory for pricing)
HSR-PRO Round	LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI LED5-90 90CRI	MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	4' 5' 6' 7' 8' R (Row length in 1' increments) SML Symmetric Row Length Row lengths are typically made up of 8' and 4' fixtures, (eg. 12' row is (1) 8' and (1) 4'), unless SRL Symmetric Row Lengths are spec'd	Y GW Gloss White (Standard) Y Premium Color CC Custom Color	CA48", 96" or 144" Aircraft Cable (Adjustable)	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	X3 Hard Ceiling X6 Slot Grid or Interlude	LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	ENL Enlighted SU-5E-IOT LUX Phillips DL LVOC Lutron Vive (Occ & RF) LVRF Lutron Vive (RF Only) NXSMP Hubbell (Occ)		
											<b>CORNERS:</b> C2 Unlit 90° 2-Way C2-120 Unlit 120° 2-Way C3 Unlit 90° 3-Way C3-120 Unlit 120° 3-Way C4 Unlit 90° 4-Way All corners available HSS square only

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS





## SNAPPRO SERIES

# ZenithPro

**Simple, yet far from 'standard'.** Start with 90° angles, and let your imagination take it from there. Zenith elevates the HalfSnap into an architectural luminaire with clean lines and dramatic, just-unique-enough configurations.




ZENITHPRO OUT

### NEW HIGHER LUMEN LEVELS

UP TO **136** LM/W

		LO	MO	SO	HO
<b>22:</b>	lm	4300	7000	9900	12400
	w	31	52	76	100
<b>33:</b>	lm	6500	10000	14000	18250
	w	47	78	114	150
<b>44:</b>	lm	8500	13800	19000	24800
	w	61	104	152	200

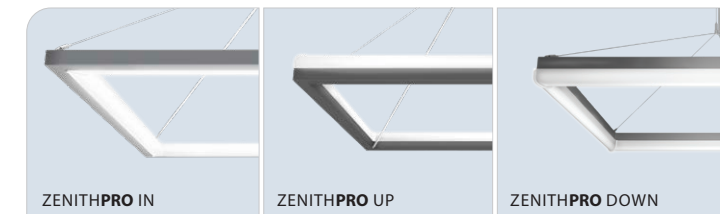

ZENITHPRO IN

ZENITHPRO UP

ZENITHPRO DOWN

SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELDING	COLOR/ FINISH	CIRCUITING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
<b>IN:</b> ZIS-PRO Square Lens	22 2' x 2'	LED27 2700K (90CRI)	LO Low	SAL Satin Acrylic Lens	TMW Textured Matte aWhite	SC Single Circuit	UNV (120-277)	4SPM48", 96" or 144" Square Cast Aluminum Canopy (4SPM: 2', 3', 4')	X1 T-Bar Exposed	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard)	EMHE Emergen- cy Battery (1350 Delivered lumens, CA Title 20 compliant)
	33 3' x 3'		MO Medium								
ZIR-PRO Round Lens	44 4' x 4'	LED3 3000K	SO Standard		YGW Gloss White (Standard)			4RPM48", 96" or 144" Round Cast Aluminum Canopy (Min from fixture to ceil- ing 22: 14', 33: 22', 44: 30')	X3 Hard Ceiling	LDE5 Lutron 5-Series EcoSystem LED	IBC Insulated Braided Cord
<b>OUT:</b> ZES-PRO Square Lens	IN & OUT: 48 4' x 8'	LED35 3500K	HO High					MPCA48", 96" or 144" Monopoint Mounting (Min from fixture to ceiling 22: 14', 33: 22', 44: 30')	X6 Slot Grid	LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black)	EBCP1G/2G Sing- gle/ Dual Gang (Electrical Box Cover Plate/Mud Ring)
	ZER-PRO Round Lens	IN : 14 1' x 4'	LED4 4000K	PROG Program- mable Light Output (Specify desired lm/ft or w/ft)	CC Custom Color			NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable)		ECO 1% 0-10v, EldoLED (Logarithmic dimming std)	
<b>UP:</b> ZUS-PRO Square Lens	24 2' x 4'	LED3- 90	90CRI					NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable)		ECDA 1% DALI, EldoLED (Logarithmic dimming std)	
		ZUR-PRO Round Lens	LED35- 90	90CRI					SUR Surface or Wall Mount (Hard ceiling only)		SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)
<b>DOWN:</b> ZDS-PRO Square Lens		LED4- 90	90CRI							SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	
		ZDR-PRO Round Lens	LED5- 90	90CRI							

VISIT PRULITE.COM FOR ALL SNAPPRO SERIES SPECIFICATIONS



## SENSOR BOX

### SNAPPRO



NOTE: Adds 3" to length, ENL: enlightened control module required



NOTE: Adds 3" to length, ENL: enlightened control module required



NOTE: Adds 6" to fixture length in center of fixture, FSP - L2 or L3 lens only




NOTE: Small cut-out of lens around sensor, Surface mount on walls only

### BOLTPRO




## ADJOINING DETAIL

### SNAPPRO





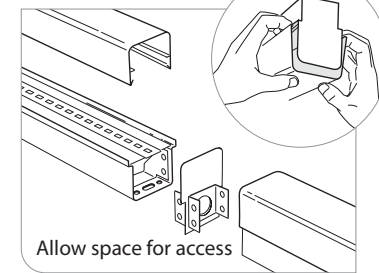


### BOLTPRO

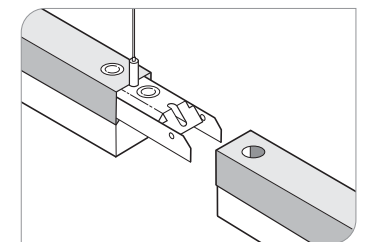






## CORNERS

### SNAPPRO

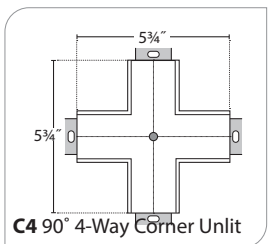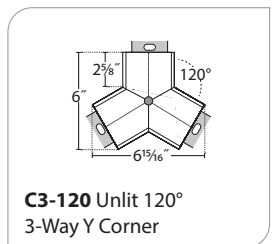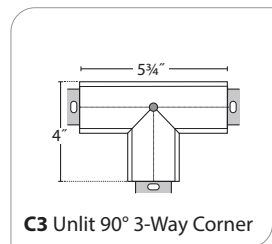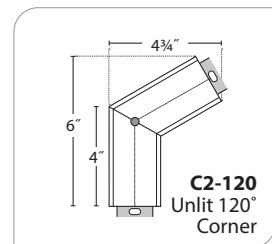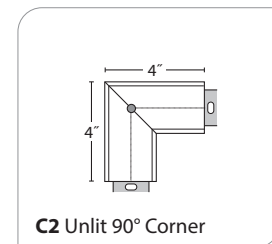









NOTE: All corners available S1 square only

### HALFSNAPPRO

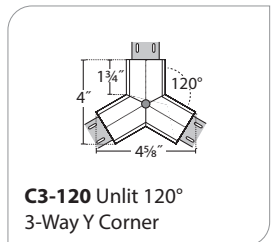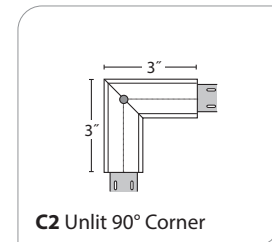



NOTE: All corners available HSS square only

### BOLTPRO

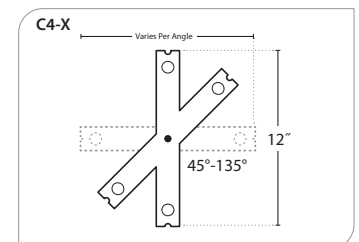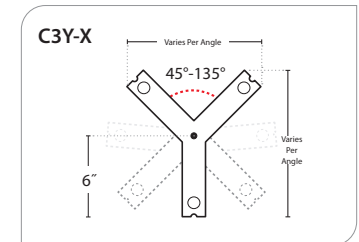

## PREMIUM COLORS

NO SET UP FEES — QUICK LEAD TIMES

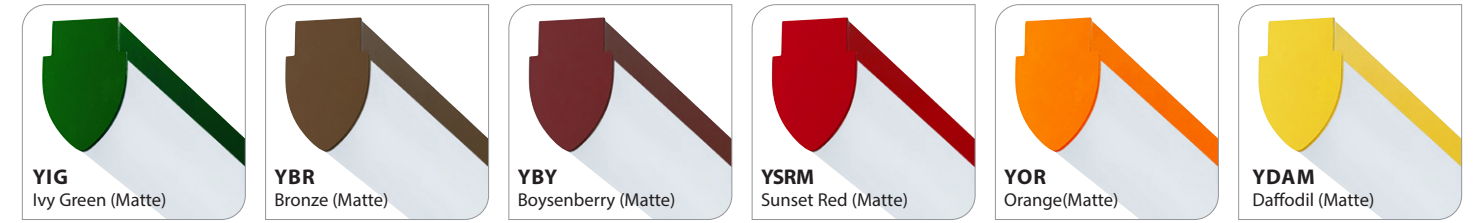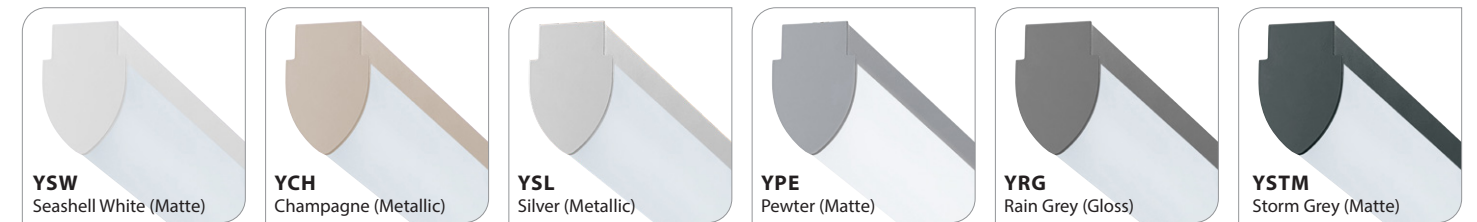

Please note that as of May 1<sup>st</sup>, 2017 the following colors have been changed to matte finishes; YSTM, YSKM, YFGM, YSRM, YDAM. To match a previous order with a glossy finish please remove the 'M', e.g. 'YST' instead of 'YSTM.'

For paint chip samples, please email: [info@prulite.com](mailto:info@prulite.com)

## LM79 & TM30 DATA:

	MEASURED CCT	MEASURED LUMENS	CRI	R9	DuV	SPD	COLOR VECTOR	TM30 COLOR DISTORTION
<b>LED27</b>	2680	80%	93	58	0.001			
<b>LED3</b>	3042	95%	82	6	0.001			
<b>LED3-90</b>	3016	85%	93	61	0.000			
<b>LED35</b>	3482	100%	82	3	0.002			
<b>LED35-90</b>	3417	85%	93	67	0.000			
<b>0.5811 in</b>	3952	102%	82	4	0.003			
<b>LED4-90</b>	3882	85%	92	67	0.003			
<b>LED5-90</b>	4889	85%	94	84	0.002			



Zenith In

CLIENT | Special Olympics Colorado (SOCO)

ARCHITECT | Waring Architects

Products  
Made in America **USA**



**PRUDENTIAL LTG.**

LA made. Nationally admired. Since 1955.

1774 East 21<sup>st</sup> Street  
Los Angeles, CA 90058

352 7<sup>th</sup> Avenue, 12th Floor  
New York, NY 10001

TEL 213.746.0360  
FAX 213.741.8590

TEL 908.658.4231

URL [prulite.com](http://prulite.com)  
EMAIL [info@prulite.com](mailto:info@prulite.com)