

Gaze | Round & Square

Surface Flush / Surface Standoff

INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

👤👤 MAY REQUIRE TWO PEOPLE TO INSTALL

MOUNTING OPTIONS

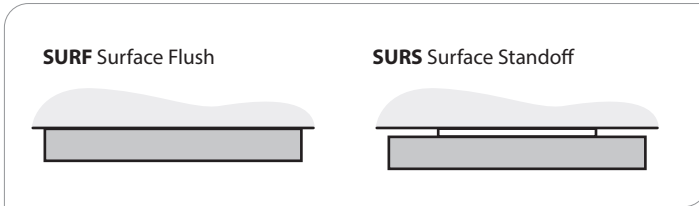


FIXTURE WEIGHTS:

	12"	18"	24"	36"	48"
ROUND LED	8lbs	17lbs	23lbs	44lbs	75lbs
SQUARE LED	9lbs	21lbs	28lbs	54lbs	100lbs

PARTS NOT INCLUDED:

PART	PART NO.	DESCRIPTION	QTY	
			12"	18", 24"
FOR 12", 18" + 24" ON-GRID MOUNTING ONLY:				
	Caddy IDS	1 ⁵ / ₁₆ " T-Grid	1	2
	Caddy IDS95	3 ¹ / ₁₆ " T-Grid	1	2

PART	PART NO.	DESCRIPTION	QTY
T-BAR MOUNTING RAIL ASSEMBLY:			
		12", 18" + 24":	1
101962		36" + 48":	2

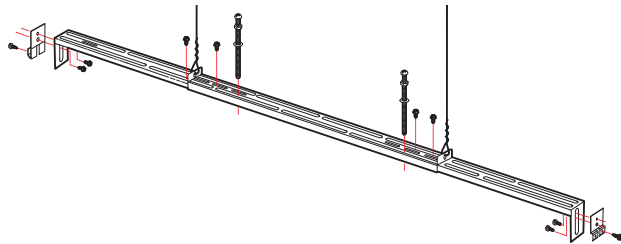

	100-00283-14	1/4-20 x 5" Round Hd. MS SL Type F	2*
	100-00165-14	1/4-20 Hex Nut	2*
	100-00008-14	1/4" x 1/2" Washer	2*
	100-00086-14	#6 x 3/8" Tek Screw	2*

* PER MOUNTING RAIL ASSEMBLY

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.

Gaze | Round & Square

Surface Flush / Surface Standoff

INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


👤👤 MAY REQUIRE TWO PEOPLE TO INSTALL

2x2 OFF- GRID MOUNTING

SQUARE

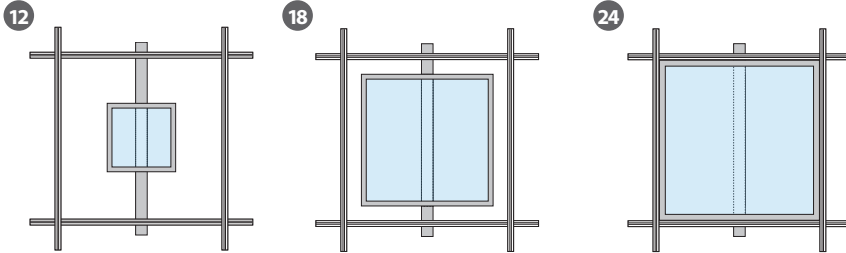

ROUND

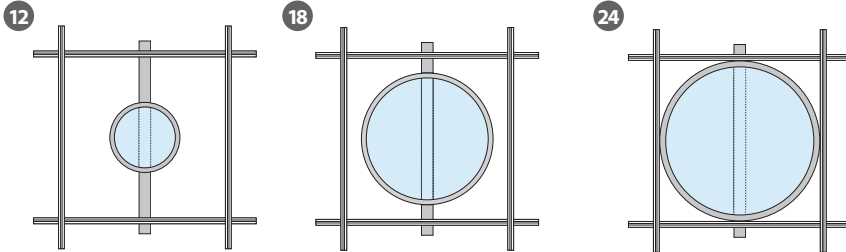

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.





INSTALLATION INSTRUCTIONS



X1 — T-BAR — ON/OFF-GRID

2x2 ON- GRID MOUNTING (SEE PAGES 7-8 FOR 18"-24" ON-GRID MOUNTING)

SQUARE

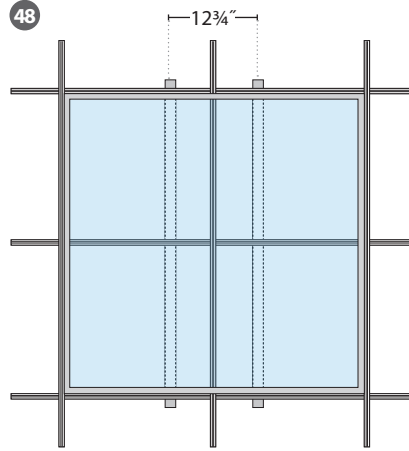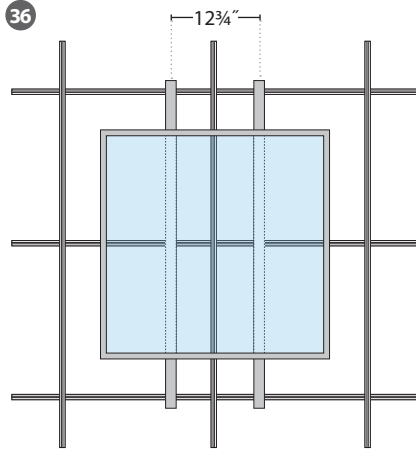

ROUND

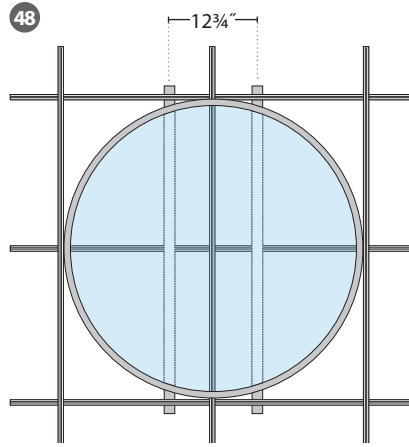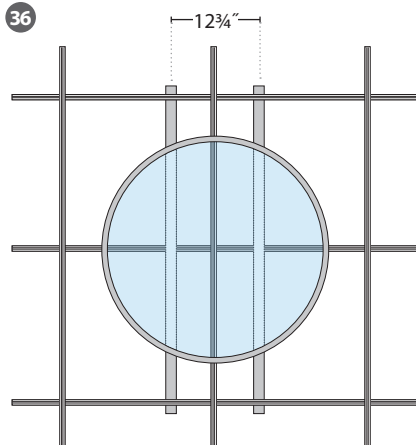


WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.



INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID

MOUNTING PLAN

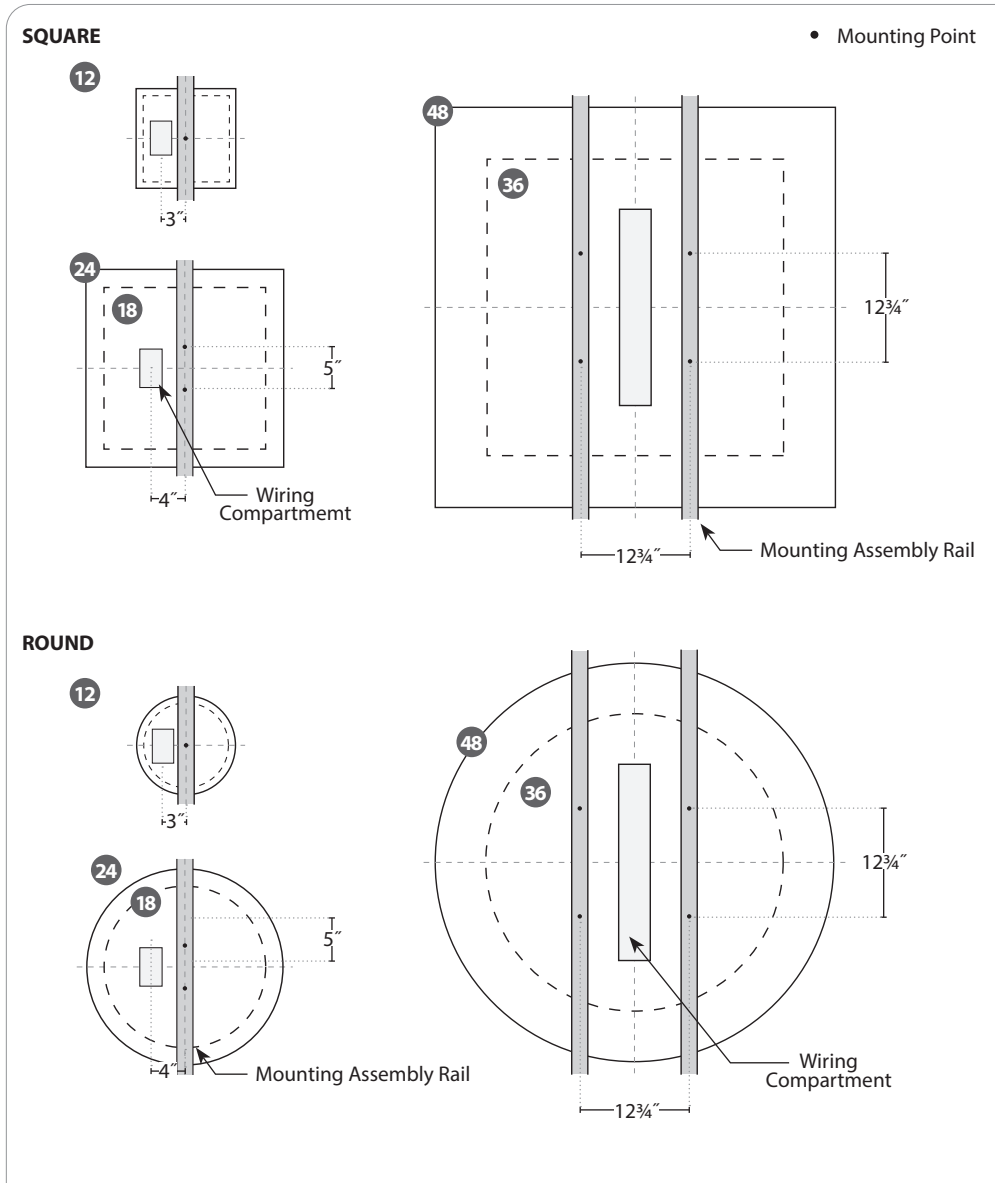





WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.



👤👤 MAY REQUIRE TWO PEOPLE TO INSTALL

INSTALLATION

NOTE: These instructions use t-bar mounting rail assembly, for 18" & 24" on-grid mounting using caddy clip, skip page 6. These instructions apply to round and square fixtures. Images may vary slightly base on fixture size.

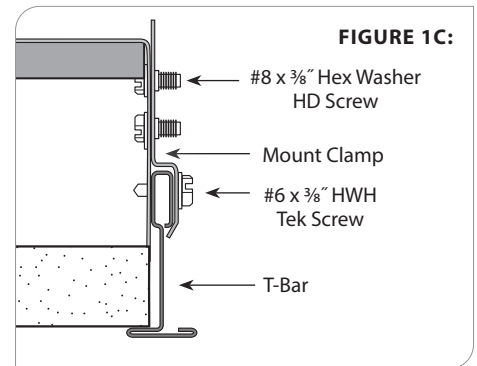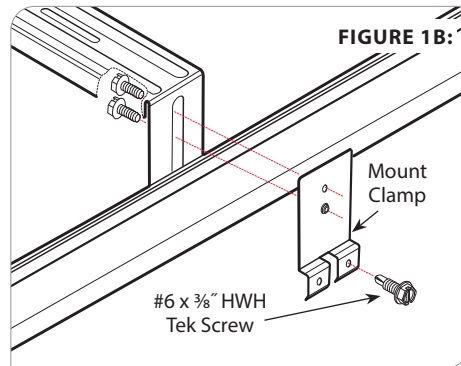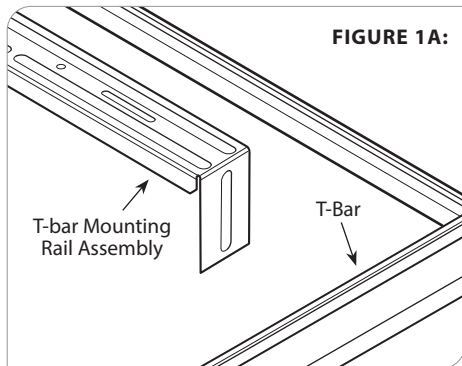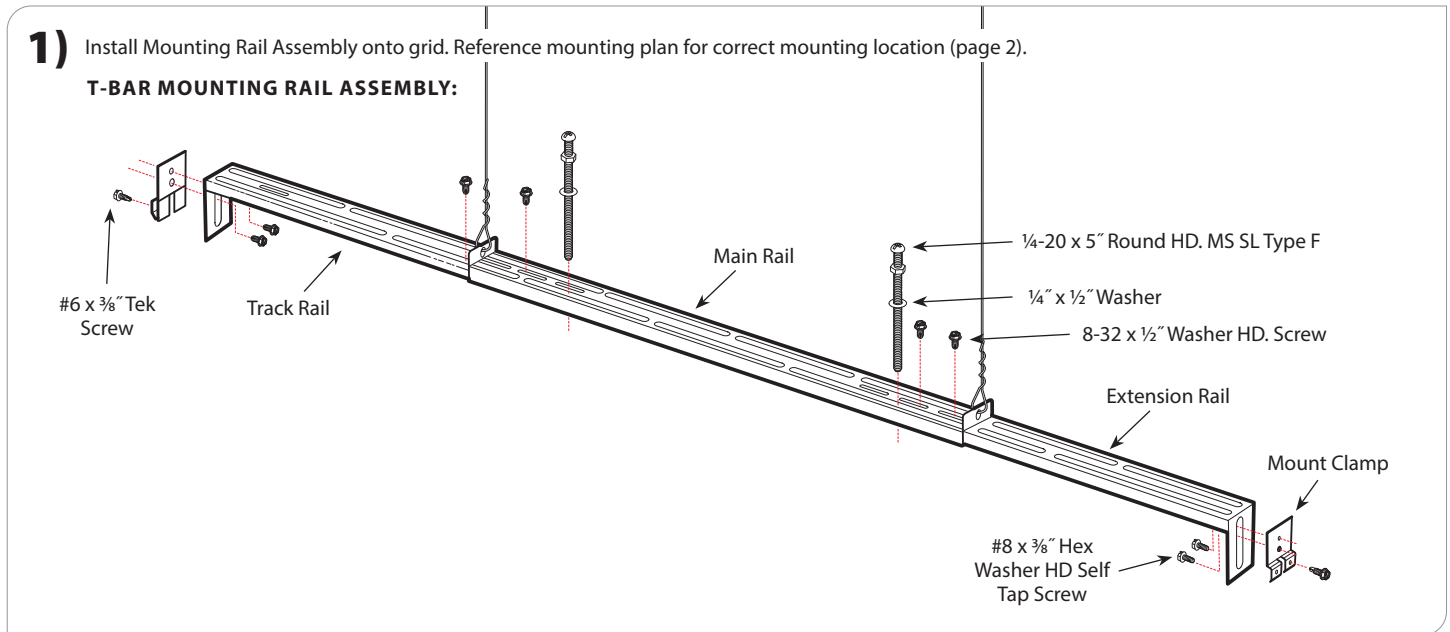

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.



INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID

MAY REQUIRE TWO PEOPLE TO INSTALL

FIGURE 2A

Clearance hole for flex conduit

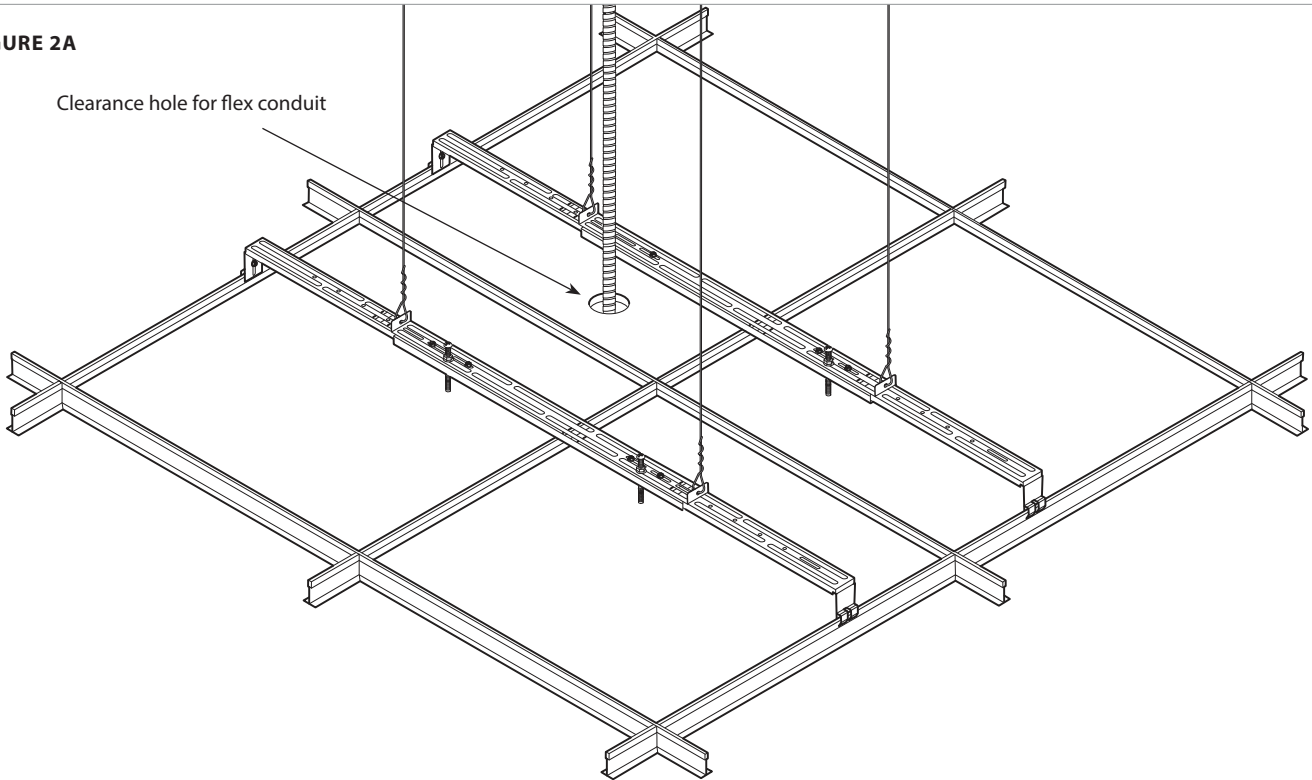


FIGURE 2B

Support Wire
(by others)

1/4" x 20
Hex Nut

1/4 x 1/2" Washer

1/4-20 x 5" Bolts

Ceiling
Tile Hole

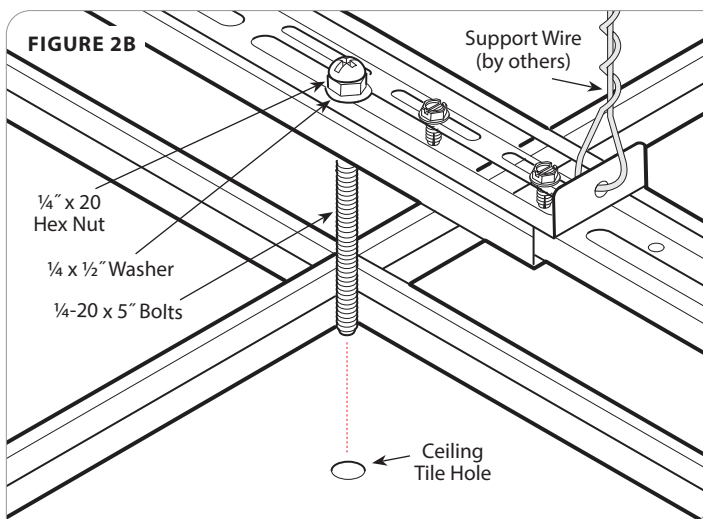


FIGURE 2C


Support Wire
(by others)

1/4" x 20 Hex Nut

1/4" x 1/2" Washer

T-Bar

Ceiling Tile

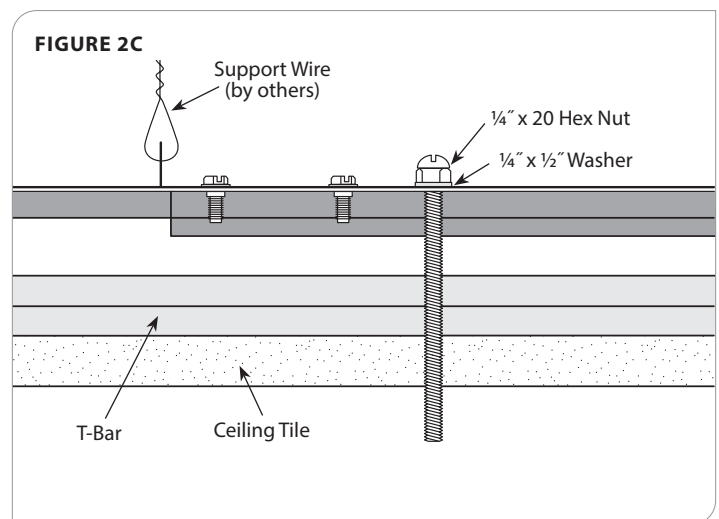

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.




INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID


2) Bring flex conduit to fixture and make wiring connections.

WIRING:

- HOT : BLACK
- NEUTRAL : WHITE
- GROUND : GREEN
- CONSTANT OR SECOND CIRCUIT HOT (EM) : RED
- LOW VOLTAGE (+) : PURPLE
- LOW VOLTAGE (-) : PINK

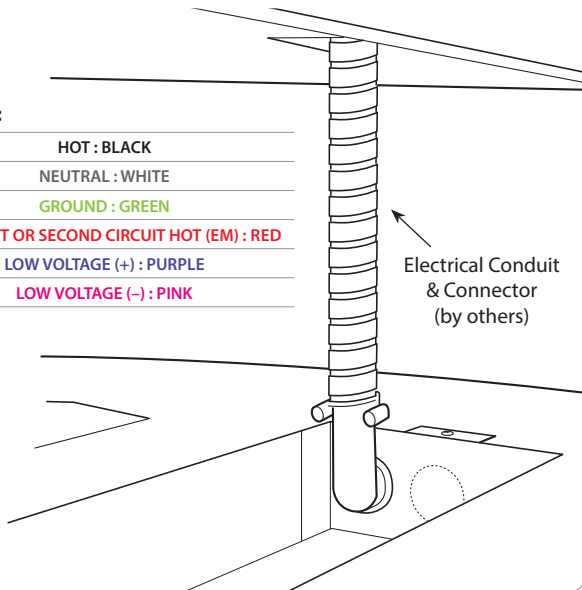


3) Mount fixture to mounting rail assembly by using ¼-20 x 5" bolt and threaded holes on fixture. Tighten bolts until fixture is snug against ceiling.

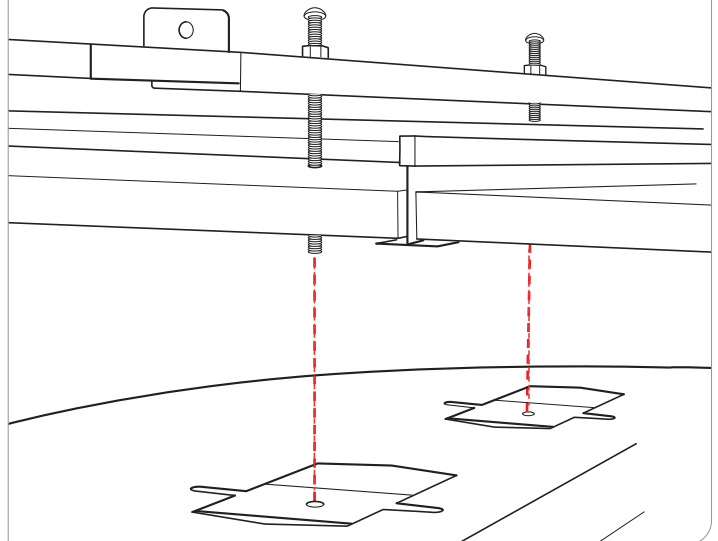


18" & 24" ON GRID MOUNTING:

1) Attach **CLOSED END** and ¼-20 bolt into threaded hole on top of light fixture. Leave enough space to slide open end under.

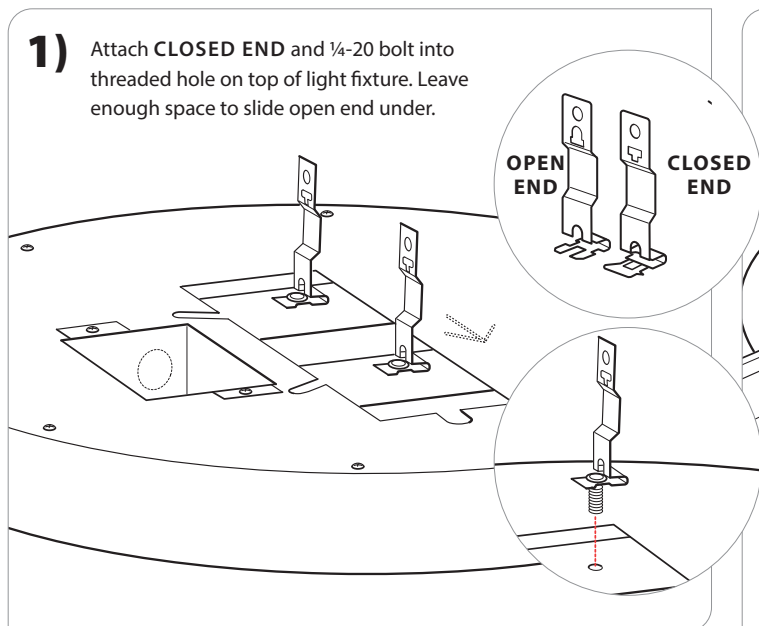

2) Place fixture on grid and snap into place the **OPEN END** of caddy clip.

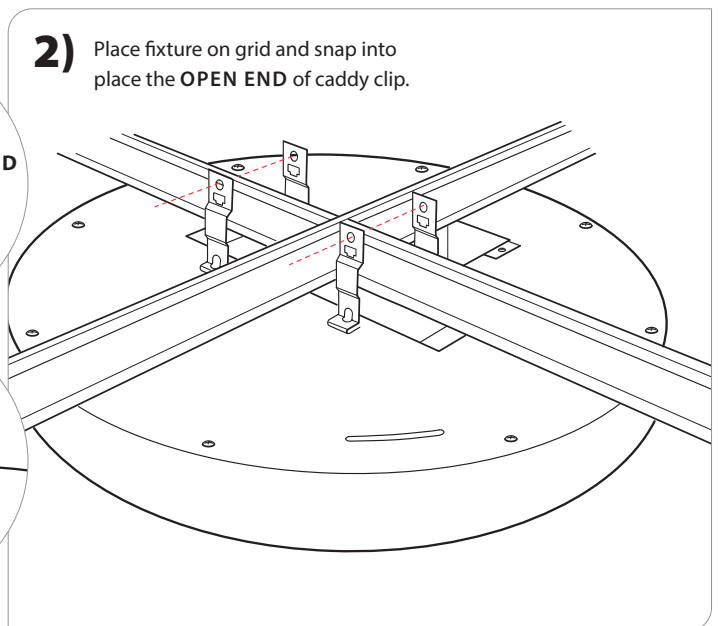

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should **ONLY** be done by a qualified licensed electrical professional.

Gaze | Round & Square

Surface Flush / Surface Standoff

INSTALLATION INSTRUCTIONS


X1 — T-BAR — ON/OFF-GRID



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

- 3)** Support Caddy Clips with wire ties connected to overhead structure.

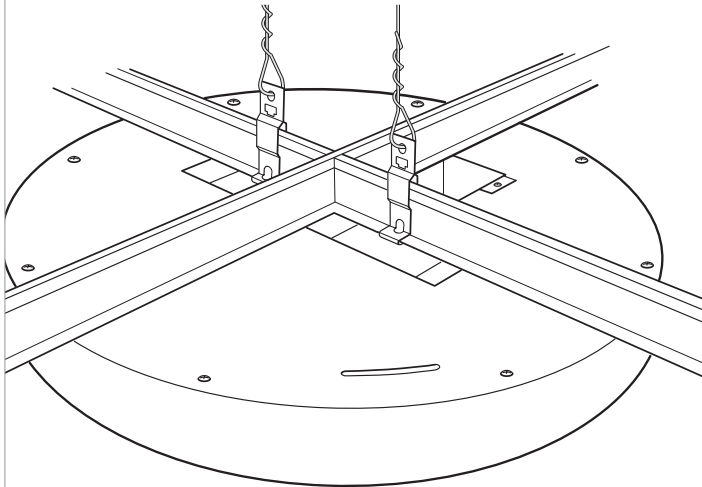

WIRING:

HOT : BLACK

NEUTRAL : WHITE


GROUND : GREEN

CONSTANT OR SECOND CONDUIT HOT (EM) : RED

LOW VOLTAGE (+) : PURPLE

LOW VOLTAGE (-) : PINK

- 4)** Notch ceiling tile to allow access to wiring compartment. Bring flex conduit to fixture and make wiring connections.

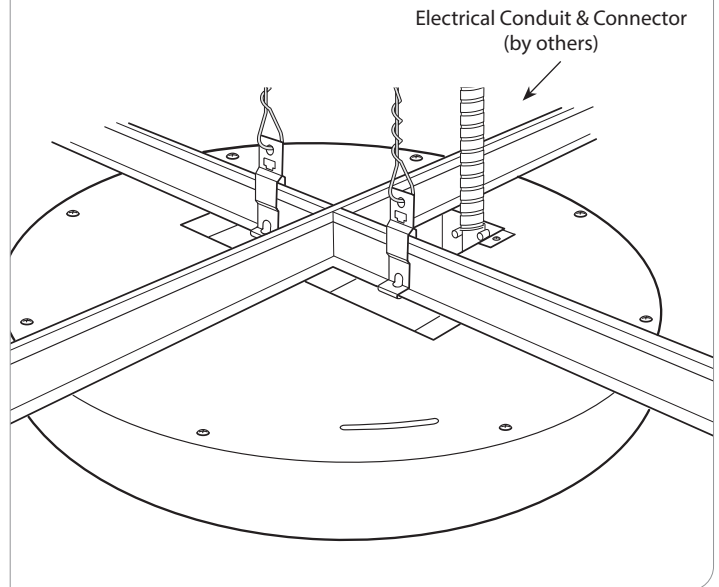

- 5)** Install remaining ceiling tiles.

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury. Fixture Installations should ONLY be done by a qualified licensed electrical professional.