


INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID



MOUNTING OPTIONS



12″	18″	24″	36″	48″

ROUND LED	8 _{lbs}	17 _{lbs}	23 _{lbs}	44 _{lbs}	75 _{lbs}
SQUARE LED	9 _{lbs}	21 _{lbs}	28 _{lbs}	54 _{lbs}	100 _{lbs}

PART	PART NO.	DESCRIPTION	Q	ТҮ
	NTING RAIL ASS	SEMBLY: 12	,18″ + 24″:	
101962			36" + 48":	2
	100-00283-14	¼-20 x 5″ Round Hd. MS SL 1	Гуре F	2*
9	100-00165-14	1/4-20 Hex Nut		2*
٢	100-00008-14	1⁄4″ x 1⁄2 Washer		2*
e	100-00086-14	#6 x ¾″Tek Screw		2*
		* PER MOUNTING R	AIL ASSEM	BLY

PARTS NOT INCLUDED:

FIXTURE WEIGHTS:

PART	PART NO.	DESCRIPTION		QTY
FOR 12 [°] , 18 [°] + 24 [°] ON-GRID MOUNTING ONLY:			12″	18", 24″
0 R	Caddy IDS15	¹‰″T-Grid	1	2
T APP	Caddy IDS915	%″T-Grid	1	2






Gaze | Round & Square Surface Flush / Surface Standoff

INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID

MAY REQUIRE TWO PEOPLE TO INSTALL

2x2 OFF- GRID MOUNTING

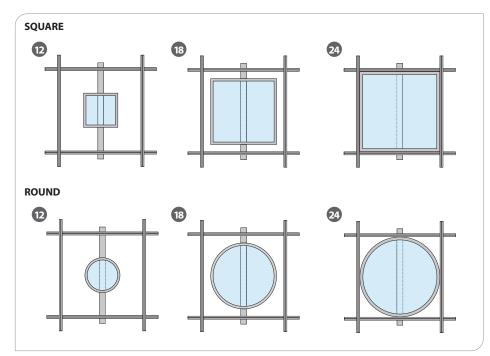








X1 — T-BAR — ON/OFF-GRID



2x2 ON- GRID MOUNTING (SEE PAGES 7-8 FOR 18"-24" ON-GRID MOUNTING)

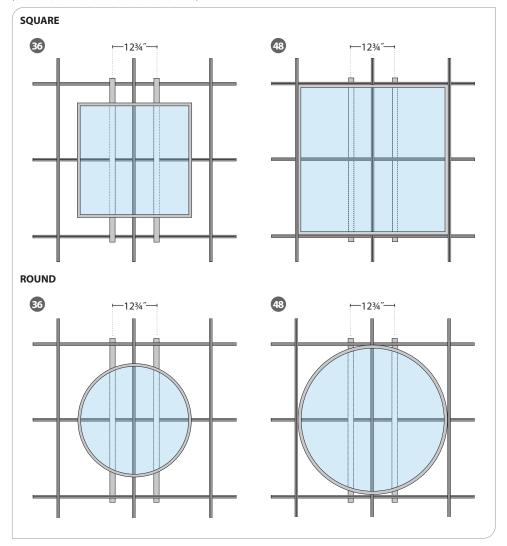






X1 — T-BAR — ON/OFF-GRID



MOUNTING PLAN

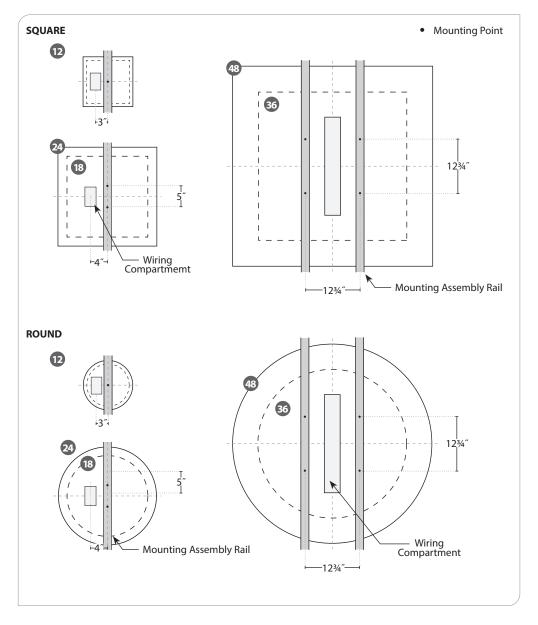






INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID

MAY REQUIRE TWO PEOPLE TO INSTALL

INSTALLATION

NOTE: These instructions use t-bar mounting rail assembly, for 18" & 24" on-grid mounting using caddy clip, skip page 6. These instructions apply to round and square fixtures. Images may vary slightly base on fixture size.

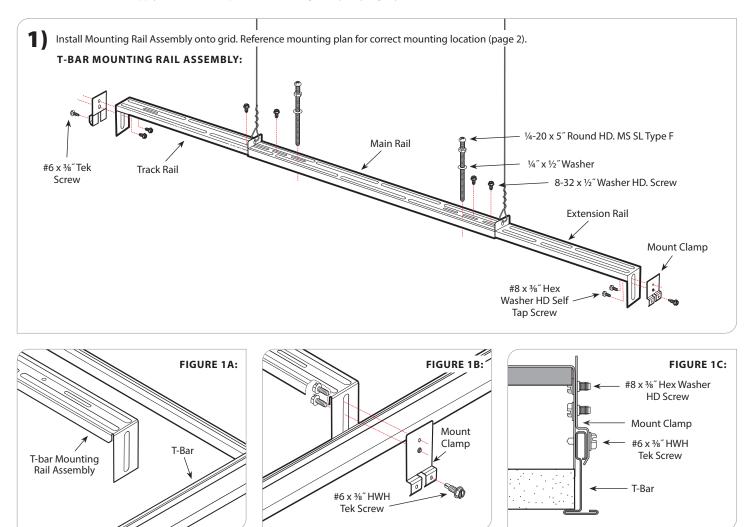







Gaze | Round & Square Surface Flush / Surface Standoff


Surface Flush / Surface Standoll


INSTALLATION INSTRUCTIONS

X1 — T-BAR — ON/OFF-GRID


11 MAY REQUIRE TWO PEOPLE TO INSTALL



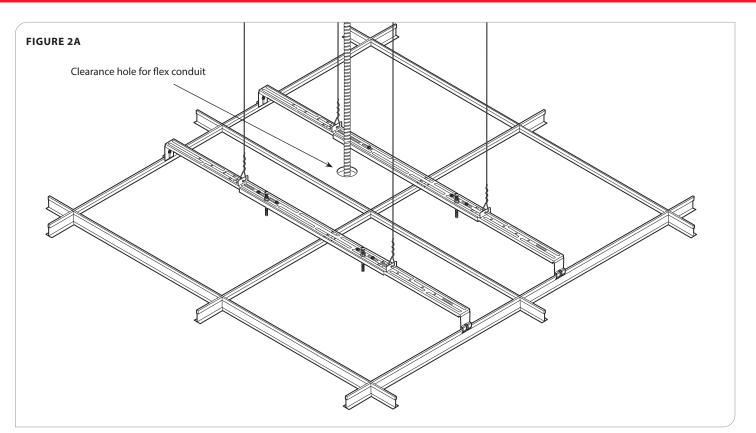

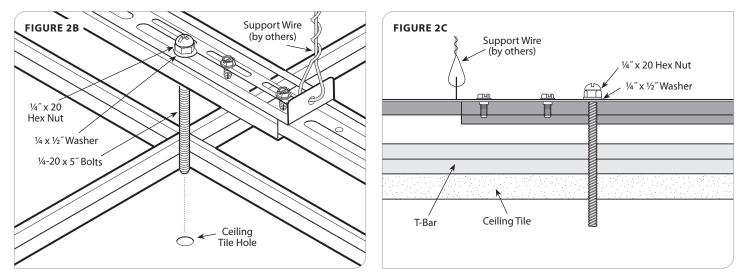



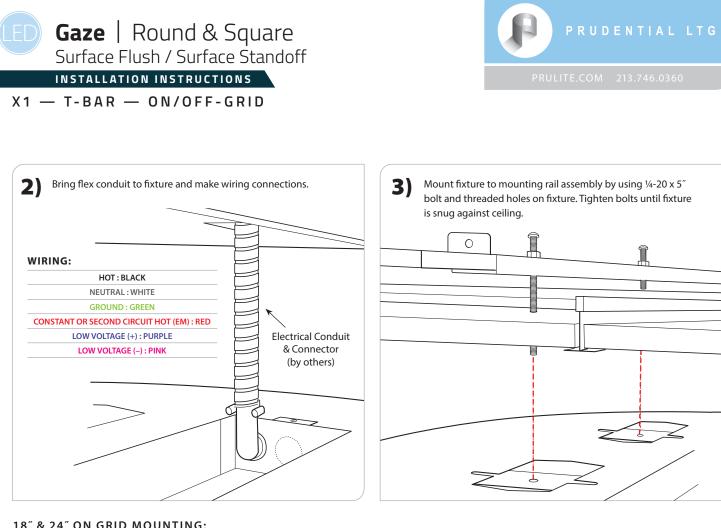

18" & 24" ON GRID MOUNTING:

