


INSTALLATION INSTRUCTIONS

X1 — T-BAR / X3 — HARD CEILING

MAY REQUIRE TWO PEOPLE TO INSTALL



PART	PART NO.	DESCRIPTION	PART	PART NO.		DESCRIPTION		
CANOPY BODIES: POWER CORDS:								
	100-00071-03	Round	ļ.	100-00023-09 100-00024-09				
				100-00912-09		SJT Power Cord		
	100-00072-03	Square		100-01002-09	6-Wire			
	S:			100-000563-09	40″			
	105760	Single Feed	Å	100-000564-09		‰ Galvanized Cable & ¼ Ball Nut & Gripper		
			<u> </u>	100-00565-09	144″			
	105892	Dual Feed		100 00440 00		Casuadia s Mire 7"		
	105597	Support Ring		100-00449-09		Grounding Wire 7″		
				100-00187-14		#8-32 x ¾ ["] HHWSL GREEN Ground Screw		
	100-00183-10	Insulation Ring	O ^{MB}	100-00047-14		#8-32 x ¾″ HWH SL Self-Tap Screws		
	100-00144-09	Romex Clamp — NPT ½″	C MMB	100-00334-14		8 x #6-32 x ¾″ Phillips Pan Head. Type F Screw		
			PLASTIC STRAIN RELIEF:					
	105717	Romex Clamp Bracket — NPT ½"		100-00228-14	WHIT			
	100-00145-09	Romex Clamp — NPT ¾″ (Dual Feed)		100-00309-14	BLAC	3/4 Wire CK		
	106029	Romex Clamp Bracket — NPT ¾" (Dual Feed)		100-00346-14	WHIT	TE 5/6 Wire		
				100-00308-14	BLAC			
DUAL FEED BUS	HINGS:	CADDY FAN-FIXTURE ASSEMBLY FOR T-BAR CEILING (BY OTHERS):						

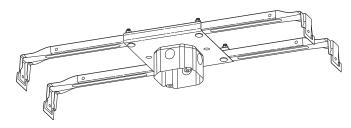

FIXTURE WEIGHTS:

	18″	24″	36″
ROUND LED	17 _{lbs}	23 _{lbs}	44 _{lbs}
SQUARE LED	21 _{lbs}	28 _{lbs}	54 _{lbs}

100-00338-14

100-00339-14

Black

White

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data. © 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058




Gaze | Round & Square RPM & SPM Pendant Mount

INSTALLATION INSTRUCTIONS


X1 — T-BAR / X3 — HARD CEILING


TRANSPORTED TWO PEOPLE TO INSTALL


RPM/SPM CANOPY MINIMUM MOUNTING HEIGHT

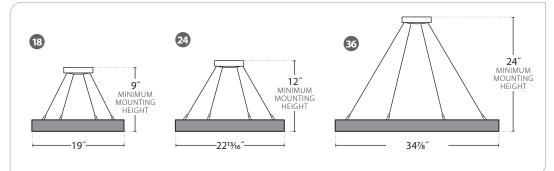

MOUNTING LOCATIONS



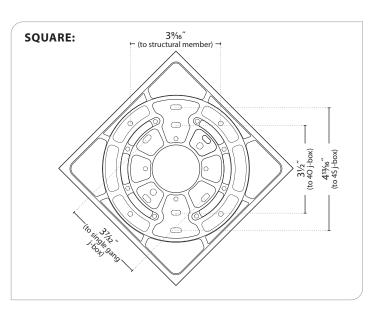









Gaze | Round & Square

RPM & SPM Pendant Mount


INSTALLATION INSTRUCTIONS

X1 — T-BAR / X3 — HARD CEILING

🛉 🛉 MAY REQUIRE TWO PEOPLE TO INSTALL



INSTALLATION

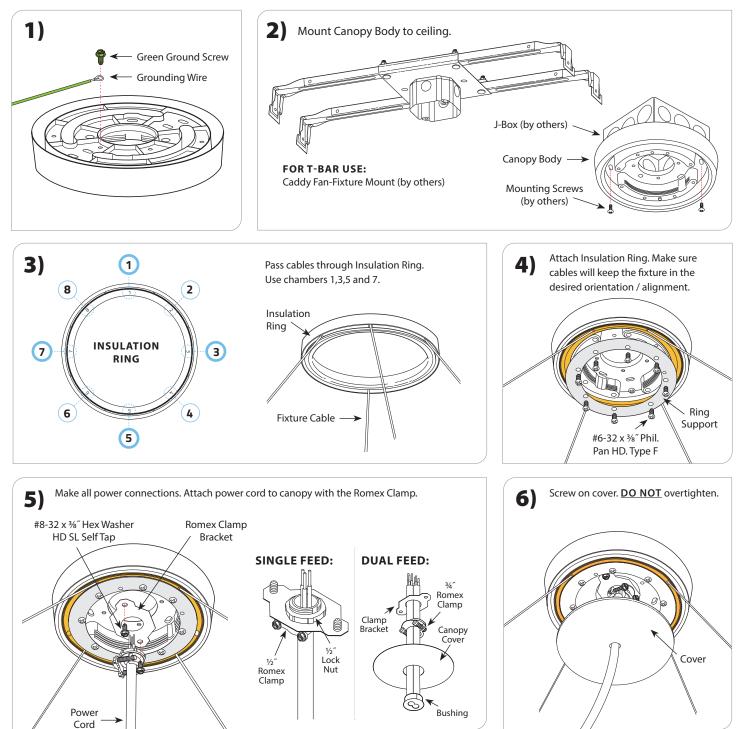






Gaze | Round & Square

RPM & SPM Pendant Mount


INSTALLATION INSTRUCTIONS

X1 — T-BAR / X3 — HARD CEILING

MAY REQUIRE TWO PEOPLE TO INSTALL

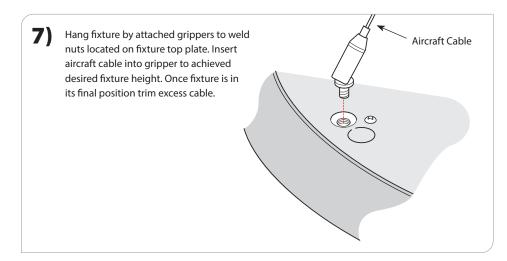

8) Field cut SJT cord to proper length and strip back portion of outer insulation. Perform wire makeups above fixture (see color diagram below) and press wire nuts (by others) individually through ⁷/₈ nole. Use plastic strain relief provided to secure cord in place.

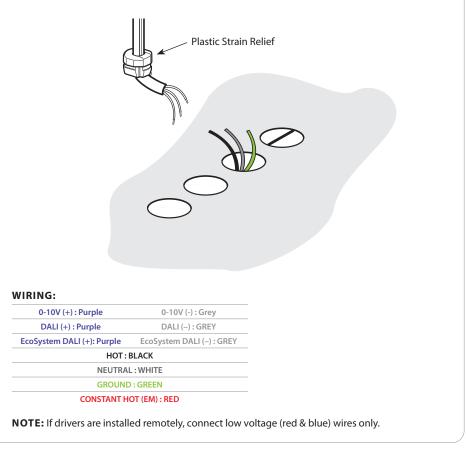







Gaze | Round & Square RPM & SPM Pendant Mount

INSTALLATION INSTRUCTIONS

X1 — T-BAR / X3 — HARD CEILING

† MAY REQUIRE TWO PEOPLE TO INSTALL

CA CABLE MOUNTING DIMENSIONS

