



Details

Specifications only for:
BionicPro, BoltPro, SnapPro & Gaze



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360



CHIPS	Luxeon 2835E 9V: L128-3080EC3500001 January 25, 2019	THD	<20% THD when loaded to a minimum of 60% Drivers sink a maximum of 1mA per driver
LUMEN MAINTENANCE	Compares amount of light produced from a luminaire when new to the amount of light produced at a specific time in the future. Eg. if a luminaire produced 1000 lumens new and now produces 700 lumens of light after 30,000 hours, L70 would equal 30,000 hours.	WALL DIMMERS	Compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. (see list below)
L70	200,000+ Hours	PROG <small>(OPTIONAL)</small>	Programmable light output. Specify desired lumens or watts per linear foot. Min: 2.5 w/ft, consult factory for requests above 10.5 w/ft.
L90	100,000+ Hours (LO, MO & SO) 60,000+ Hours (HO)	BINNING	Standard binning (all Prudential LED boards) includes testing at the chip level and board integration to provide consistent color temperature within a 3-step MacAdams ellipse, with +/- 5% lumen output range and +/- .004 Duv.
REPLACEMENT	All Prudential Ltg LED fixtures are designed with field-replaceable LED modules and drivers.	COLOR	See next page for detailed CRI specs. Fixtures with identical CCT and CRI may still appear to be different colors because of Duv. Duv defines how far an LED light source deviates from the black body source. +Duv has a green hue, -Duv is pinkish. Our exclusive Prubin process bins +/- .004 Duv ensuring a consistency in hue (as well as color and brightness).
DRIVER	All drivers are Constant Current (Constant Voltage currently N/A, consult factory for large projects)	WARRANTY	Single-source, 5 year limited warranty covers standard components and construction
DIMMING	Standard Osram drivers are current reduction style dimming from max output to 350mA. Below 350mA (PWM style dimming is employed using > 1K herz frequency min Dimming current is 15mA for 1% drivers and 10% of mA settings for 10% drivers (eg. 350mA dimming current would be 35mA). See specific driver spec sheets for other available drivers listed below.		

DIMMERS	MODEL	TYPE
Leviton	IP710-DLX	0-10V
Lutron	DVTV-XX	0-10V
Sylvania	ELMC-SL3W-TVWBX/UNV	0-10V
Encelium EMS	EN-LCM-1R10V-GB2-BK	0-10V
Wattstopper	ADF-120277	0-10V
Synergy Controls	ISD BC	0-10V

NOTE: Chart at left is for Osram 0-10V dimmers. The absence of a dimmer from this chart does not necessarily imply incompatibility. Most 0-10v dimmers are compatible with Osram drivers.

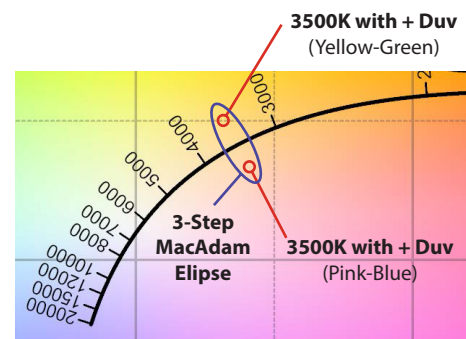

DRIVERS ARE LINKED TO MANUFACTURER SPEC SHEETS

DRIVERS	BRAND	MODEL	PART #	WATTS	CODE
0-10v, 1% Dimming	Osram	Optotronic	G2 51645 (47-48)	30, 48, 50, 85w	DM01
EcoSystem 5%	Lutron	5 Series	Consult factory	5-75w	LDE5
EcoSystem 1% Soft Fade to Black	Lutron	Hi-Lume	Consult factory		LDE1
1% 0-10v	EldoLED	ECOdrive	ECO566L1	50w	ECO
1% DALI	EldoLED	ECOdrive	ECO565L2	50w	ECDA
0.1% 0-10v, Dim to Dark	EldoLED	SOLOdrive	SOLO566U	50w	SOLO
0.1% DALI, Dim to Dark	EldoLED	SOLOdrive	SOLO565U	50w	SODA
Emergency	Iota	ILB-SL-CP08-HE	ILB-2412	8w	EMHE



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

LED Details

1

02-06-2024