




Zenith™ Up | Pendant



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

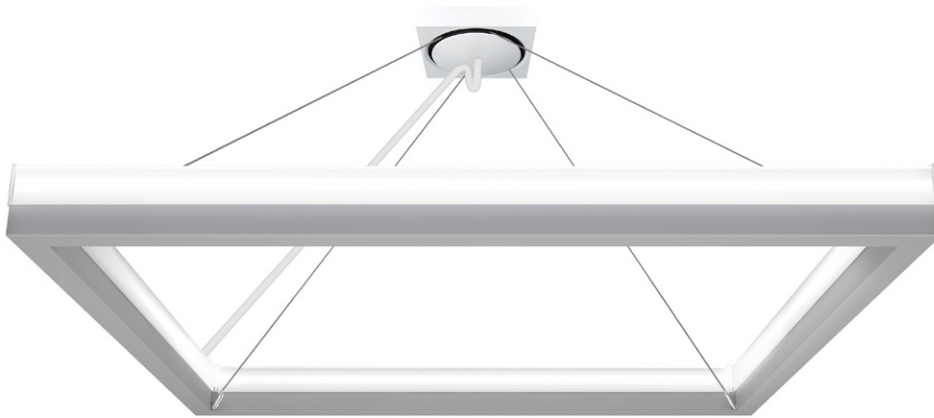

Type:

Job:

ALSO AVAILABLE...



Zenith In



Zenith Down



Zenith Out


Our indirect halo of light.

Sky-high efficacy, integral driver, with no set-up fee for premium colors, Zenith Up is a versatile and lively square uplight.

Additional Zenith options (In, Out and Down) offer a wide range of distributions and aesthetics.



ZUS-22-LED4-LO-SAL
3866 Delivered Lumens
34 Watts
114 lm/w



UP TO **115** LPW  (CLICK HERE)

		LO	MO	SO
22:	lm	3800	5000	7000
	w	34	44	72
33:	lm	5750	7500	10500
	w	50	66	108
44:	lm	7650	9950	14100
	w	67	88	140



Made in the USA

Lumen output may vary +/- 5%
4000K used for lm/ft estimates above
3500K -2% llf, 3000K -4%, 2700K -6%
-10% LLF for 90 CRI (4K, 3500K and 3K)

See LED Details PDF for more info

SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELD-ING	COLOR/ FINISH	CIRCUIT-ING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
				SAL		SC					
ZUS Square Lens	22 2' x 2'	LED27 2700K (90CRI)	LO Low	SAL Satin Acrylic	TMW Textured Matte White	SC Single Circuit	UNV (120-277)	4SPM Square Cast Aluminum Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30")	X1 T-Bar 1 5/16" or 5/16" Exposed (Standard) Consult factory for 5/16" Tegular	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard)	EMHE CAT20 Emergency Battery (1000 delivered lumens; NA - 2', integral for 3' & 4'; CA Title 20 compliant)
ZUR Round Lens	33 3' x 3'	LED3 3000K	MO Medium		YGW Gloss White (Standard)		347 (Emergency battery requires a Step Down transformer)	4RPM Round Cast Aluminum Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30")	X3 Hard Ceiling	LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming)	IBC Insulated Braided Cord
	44 4' x 4'	LED35 3500K	SO Standard		Y Premium Color			MPCA48", 96" or 144" Monopoint Mounting (Adj- 36" min from fixture to ceiling) Note: Fixture may spin with air movement	X6 Slot Grid or Interlude	ECO 1% 0-10v, EldoLED (Logarithmic dimming std)	
		LED4 4000K	PROG Programmable Light Output (Specify desired lm/ft or w/ft)		CC Custom Color					ECDA 1% DALI, EldoLED (Logarithmic dimming std)	
		LED35-90 90CRI								SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	
		LED35-90 90CRI								SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	
		LED4-90 90CRI									



Zenith™ Up | Pendant



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

2 x 2 PHOTOMETRICS

LOW OUTPUT:

ZUS-22-LED4-LO-SAL


3866 Delivered Lumens

34 Watts

114 lm/w

4000 CCT

Test #101409101



Zonal Lumen Summary:

0-90 (Down) = 11%

90-180 (Up) = 89%

Vertical Angle	0°	25°	45°	65°	90°
0°	0	0	0	0	0
5°	21	21	20	21	21
15°	29	35	30	30	28
25°	37	41	42	40	37
35°	48	61	56	53	47
45°	57	66	71	67	56
55°	65	78	85	79	65
65°	75	94	103	97	80
75°	79	96	105	106	87
85°	95	109	110	90	71
90°	88	106	115	101	81
95°	185	208	219	197	167
105°	328	360	370	344	304
115°	502	523	522	507	478
125°	655	661	652	650	639
135°	792	791	780	788	789
145°	925	928	924	931	1002
155°	1070	1076	1077	1078	1075
165°	1199	1204	1204	1205	1201
175°	1263	1264	1262	1265	1264
180°	1269	1269	1269	1269	1269

LUMEN MAINTENANCE

Designed to last with cool running mid-power LEDs projected to maintain 90% (L90) of their initial output for 100,000 hours (at HO), and L70 exceeding 150,000 hours.

LED SYSTEM

LED modules and drivers are field replaceable.

PROG

(OPTIONAL)

Programmable light output. Specify desired lumens or watts per fixture.

BINNING

Standard binning (all Prudential LED boards) includes testing at the chip level and board integration to provide consistent color temperature within a 3-step MacAdams ellipse, with +/- 5% lumen output range and +/- .004 Duv.

LABELS

ETL damp labeled and I.B.E.W. manufactured.

ELECTRICAL

Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. Max driver size 1¼" w x 1" h.

CONSTRUCTION

Housing

Die-formed 22-gauge steel, >20% PC recycled, 100% recyclable.

Corners

Injection molded satin acrylic, 100% recyclable.

Lens

Extruded acrylic, 100% recyclable.

MOUNTING

Fixture is to be suspended with aircraft cables.

WEIGHT

22: 15 lbs 33: 22 lbs 44: 30 lbs

WARRANTY

Single-source, 5 year limited warranty covers standard components and construction.



Zenith™ Up | Pendant



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360




Choose from one of our Premium Colors with no set-up fee.


For paint chip samples, please email: info@prulite.com




DIMENSIONS

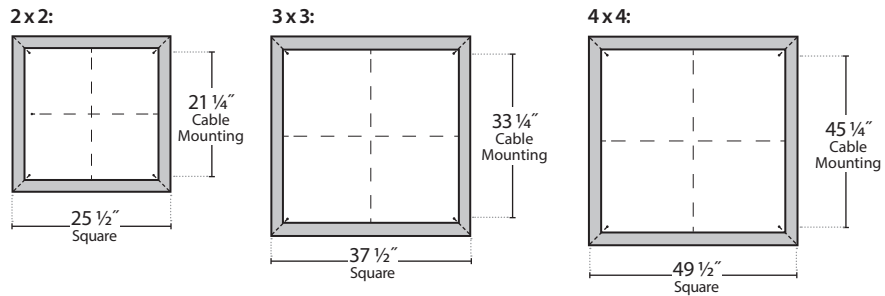


MOUNTING





CORNER DETAIL



4RPM: Round Cast Aluminum Canopy
4RPM: 2', 3', 4' (4 Cables)

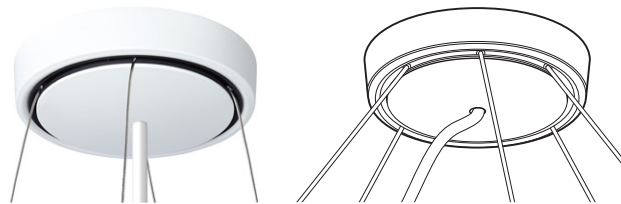

4SPM: Square Cast Aluminum Canopy
4SPM: 2', 3', 4' (4 Cables)

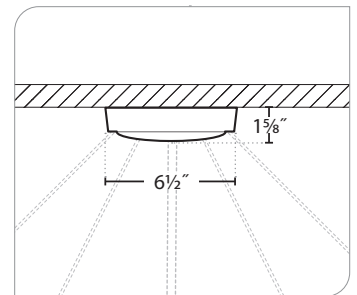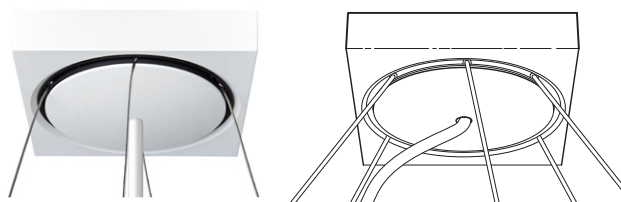

NOTE: Canopies cannot mount directly to t-bar grids