



ZenithPro Up | Pendant



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

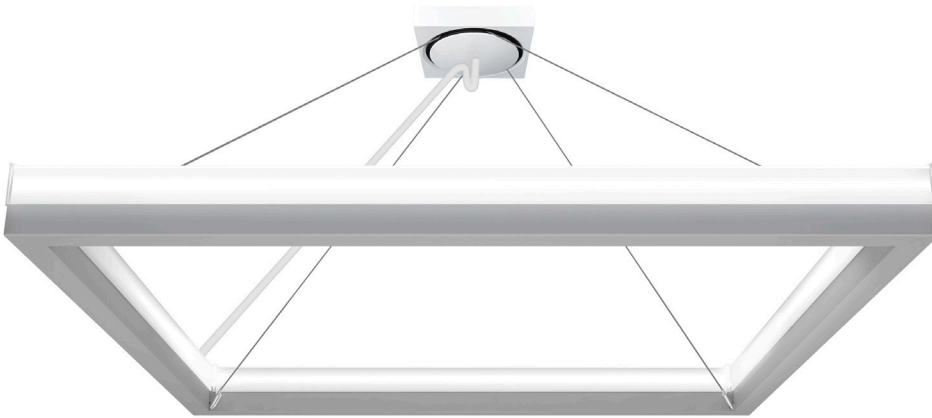

ALSO AVAILABLE...



ZenithPro In



ZenithPro Down



ZenithPro Out

Our indirect halo of light.

Sky-high efficacy, integral driver, with no set-up fee for premium colors, Zenith Up is a versatile and lively square uplight.

Additional Zenith options (In, Out and Down) offer a wide range of distributions and aesthetics.

ZUS-PRO-22-LED4-LO
 4295 Delivered Lumens
 31 Watts
 139 lm/w

UP TO 138 LM/W

	LO	MO	SO	HO
22: lm	4300	7000	9900	12400
w	31	52	76	100
33: lm	6500	10000	14000	18250
w	47	78	114	150
44: lm	8500	13800	19000	24800
w	61	104	152	200

SMART SPECS



Lumen output may vary +/- 5%
 4000K used for lm/ft estimates above
 3500K -2% If, 3000K -4%, 2700K -6%
 -10% LLF for 90 CRI (4K, 3500K and 3K)

SERIES	NOMINAL LENGTH	LED COLOR	OUTPUT	SHIELDING	COLOR/ FINISH	CIRCUITING	VOLTAGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
				SAL		SC					
ZUS-PRO Square Lens	22 2' x 2' 33 3' x 3' 44 4' x 4'	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI LED5-90 90CRI	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	SAL Satin Acrylic	TMW Textured Matte White YGW Gloss White (Standard) Y_ Premium Color CC Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget NOTE: All canopies are painted the same color as the fixture. Consult factory to specify	SC Single Circuit	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	4SPM Square Cast Aluminum Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30") 4RPM Round Cast Aluminum Canopy (Min from fixture to ceiling 22: 14", 33: 22", 44: 30") MPCA48", 96" or 144" Monopoint Mounting (Adj- 36" min from fixture to ceiling) Note: Fixture may spin with air movement	X1 T-Bar 1/8" or 1/4" Exposed (Standard) Consult factory for 3/8" Tegular X3 Hard Ceiling X6 Slot Grid or Interlude	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE Emergency Battery (1350 Delivered lumens, CA Title 20 compliant) ETS-DR Iota ETS-DR Emergency Transfer Switch IBC Insulated Braided Cord



2 x 2 PHOTOMETRICS


Low Output:

ZUS-PRO-22-LED4-LO

4295 Delivered Lumens

31 Watts

139 lm/w



Zonal Lumen Summary:

0-90 (Down) = 11%

90-180 (Up) = 89%

Vertical Angle	0°	25°	45°	65°	90
0°	0	0	0	0	0
5°	21	21	20	21	21
15°	29	30	30	30	28
25°	37	41	42	40	37
35°	48	61	56	53	47
45°	57	66	71	67	56
55°	65	78	85	79	65
65°	75	94	103	97	80
75°	79	96	105	106	87
85°	95	109	110	90	71
90°	88	106	115	101	81
95°	185	208	219	197	167
105°	328	360	370	344	304
115°	502	523	522	507	478
125°	655	661	652	650	639
135°	792	791	780	788	789
145°	925	928	924	931	1002
155°	1070	1076	1077	1078	1075
165°	1199	1204	1204	1205	1201
175°	1263	1264	1262	1265	1264
180°	1269	1269	1269	1269	1269

LUMEN MAINTENANCE

L70 — 200,000+ Hours

L90 — 100,000+ Hours (LO, MO & SO)

L90 — 60,000+ Hours (HO)

LED SYSTEM LED modules and drivers are field replaceable.

PROG (OPTIONAL) Programmable light output. Specify desired lumens or watts per linear foot. Min: 3.75 w/ft, Max 12.5 w/ft.

LABELS ETL damp labeled and I.B.E.W. manufactured.

ELECTRICAL Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. Max driver size 1.65" w x 1.25" h. 32v Forward Voltage (+/- 1 volt based on drive current)

Drive Currents:

LO: 100mA, **MO:** 100mA, **SO:** 250mA, **HO:** 325mA

CONSTRUCTION

Housing Die-formed 22-gauge steel, >20% PC recycled, 100% recyclable

Corners Injection molded satin acrylic, 100% recyclable

Lens Extruded acrylic, 100% recyclable

MOUNTING Fixture is to be suspended with aircraft cables.

WEIGHT 22: 15 lbs 33: 22 lbs 44: 30 lbs

WARRANTY Single-source, 5 year limited warranty covers standard components and construction.



FINISH COLORS

STANDARD:

TMW — Textured Matte White	YGW — Gloss White
----------------------------	-------------------

PREMIUM:

YSW — Seashell White (Matte)	YRG — Rain Grey (Gloss)
------------------------------	-------------------------

YPE — Pewter (Matte)	YSTM — Storm Grey (Matte)
----------------------	---------------------------

YBK — Black (Matte)	YBB — Black (Semi Gloss)
---------------------	--------------------------

YSKM — Sky (Matte)	YMB — Military Blue (Matte)
--------------------	-----------------------------

YSAM — Sapphire (Matte)	YIB — Interstate Blue (Matte)
-------------------------	-------------------------------

YBR — Bronze (Matte)	YSRM — Sunset Red (Matte)
----------------------	---------------------------

YOR — Orange (Matte)	YDAM — Daffodil (Matte)
----------------------	-------------------------

YFGM — Forest Green (Matte)	YSL — Silver (Metallic)
-----------------------------	-------------------------

YCH — Champagne (Metallic)	
----------------------------	--


--	--

LUXE METALLICS: YCP — Copper Penny (Metallic)	YGN — Gold Nugget (Metallic)
---	------------------------------


YBZ — Bronze (Metallic)	
-------------------------	--

Choose from one of our Premium Colors with no set-up fee.


For paint chip samples, please email: info@prulite.com

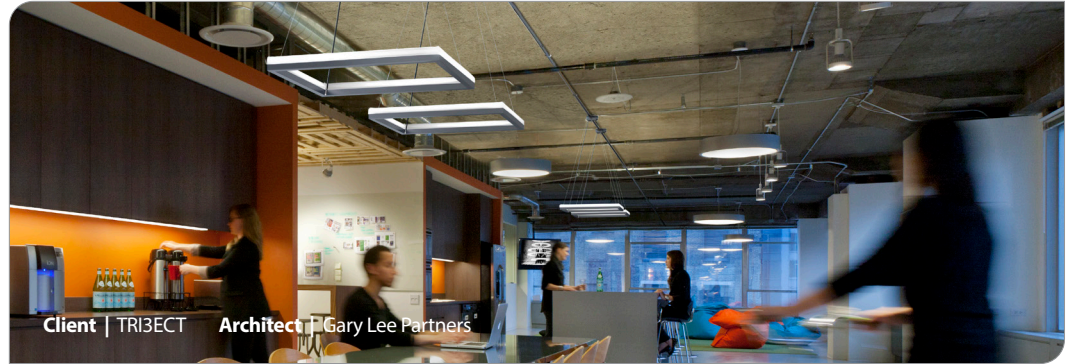


DIMENSIONS

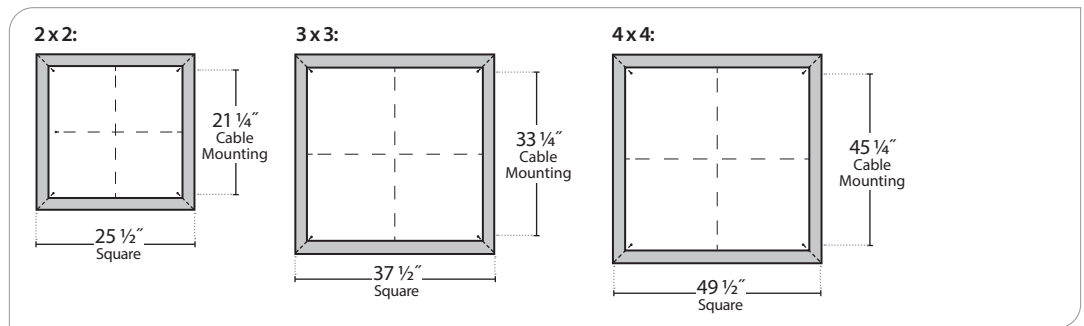

CORNER DETAIL




MOUNTING



4RPM: Round Cast Aluminum Canopy
4RPM: 2', 3', 4' (4 Cables)

4SPM: Square Cast Aluminum Canopy
4SPM: 2', 3', 4' (4 Cables)

NOTE: Canopies cannot mount directly to t-bar grids

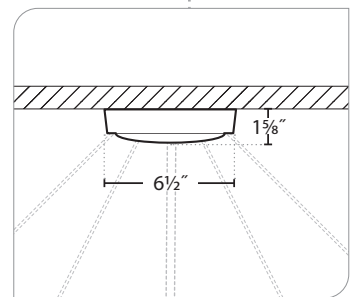



LM79 & TM30 DATA:

	MEASURED CCT	MEASURED LUMENS	CRI	R9	DuV	SPD	TM30 — COLOR VECTOR	TM30 — COLOR DISTORTION
LED27	2680	80%	93	58	0.001		 89 Rf	 97 Rg
LED3	3042	95%	82	6	0.001		 81 Rf	 92 Rg
LED3-90	3016	85%	93	61	0.000		 88 Rf	 96 Rg
LED35	3482	100%	82	3	0.002		 81 Rf	 92 Rg
LED35-90	3417	85%	93	67	0.000		 88 Rf	 96 Rg
LED4	3952	102%	82	4	0.003		 81 Rf	 92 Rg
LED4-90	3882	85%	92	67	0.003		 87 Rf	 96 Rg
LED5-90	4889	85%	94	84	0.002		 86 Rf	 95 Rg