

“For fans of the asymmetrical”

Sleek and seamless Euro-styled body and lens with 5” height and sharp .5” trim detail. Seamless and evenly lit flat white acrylic lenses and independent uplight.

OLV-30-LED35-HO-FWA-D1
 7284 Delivered Lumens
 118 Watts
 62 lm/w

**LUMEN OUTPUT:
Direct (D1)**

	LO	MO	SO	HO
OLV-30: lm/w	2900	3750	5000	7275
	42	58	80	118
OLV-40: lm/w	5000	6750	8850	12500
	70	97	133	200



Lumen output may vary +/- 5%
 3500K used for lm/ft estimates above
 4000K +2% llf, 3000K -2%, 2700K -4%
 -10% LLF for 90 CRI (4K, 3500K and 3K)

SERIES	LED COLOR	OUTPUT	SHIELDING	COLOR/ FINISH	DISTRIBUTION	CIRCUITING	VOLTAGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
			FWA								
OLV-30 3' Dia. OLV-40 4' Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm or w/ fixture) NOTES: Specify separate output Down / Up if desired eg. LO/ HO (Low Down, High Up) Consult factory for uplight lumen output 3': NA LO or MO Uplight unless Downlight is same output level	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard) YGW Gloss White Y_ Premium Color CC Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget NOTE: All canopies are painted the same color as the fixture. Consult factory to specify	D1 Direct Solid Top NOTE: Only 1 row of LEDs D9 Semi-Direct (NA Surface) NOTE: Only 1 row of LEDs, 17% Up, 83% Down. To specify more or less Uplight, see Output.	SC Single Circuit DC Dual Circuit (Two feeds required, D9 only)	UNV (120-277) 347 (Emergency battery requires a Step Down transformer)	SUR Surface Mount (1" Standoff from ceiling) 3RPM48", 96" or 144" Round Cast Aluminum Canopy (Min from fixture to ceiling 3': 16", 4': 20") 3SPM48", 96" or 144" Square Cast Aluminum Canopy (Min from fixture to ceiling 3': 16", 4': 20") MPCA48", 96" or 144" Monopoint Mounting (18" min from fixture to ceiling) NOTE: NA on 4'. Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable) SSC_ Top-Swivel Stem Mount (Specify length)	X1 T-Bar 1 1/16" or 3/16" Exposed (Standard) X3 Hard Ceiling X6 Slot Grid or Interlude	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Lutron Hilight 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE CAT20 Emergency Battery (Remote only; 600 delivered lumens; CA Title 20 compliant) IBC Insulated Braided Cord



D1 — DIRECT

High Output:

OLV-30-LED35-HO-FWA-D1


7284 Delivered Lumens

118 Watts

62 lm/w

Test

#102999977LAX-002



Zonal Lumen Summary:

0-90 (Down) = 100%

2512

Vertical Angle	0°	25°	45°	65°	90°
0°	2512	2512	2512	2512	2512
5°	2499	2500	2501	2501	2501
15°	2410	2411	2411	2410	2410
25°	2235	2236	2234	2233	2232
35°	1984	1988	1985	1982	1980
45°	1675	1676	1671	1668	1666
55°	1316	1313	1308	1306	1307
65°	924	922	917	915	914
75°	723	723	718	717	716
85°	527	527	522	522	521
90°	0	0	0	0	0

D9 — SEMI-DIRECT

High Output:

OLV-30-LED35-HO-FWA-D9


8748 Delivered Lumens

138 Watts

63 lm/w

Test

#102999977LAX-002



Zonal Lumen Summary:

0-90 (Down) = 80.5%

90-180 (up) = 19.5%

2472

Vertical Angle	0°	22.5°	45°	67.5°	90°
0°	2472	2472	2472	2472	2472
5°	2450	2455	2455	2459	2423
15°	2347	2346	2351	2359	2359
25°	2163	2161	2167	2174	2183
35°	1911	1905	1911	1919	1932
45°	1596	1594	1594	1603	1617
55°	1247	1236	1235	1243	1255
65°	868	853	853	859	870
75°	489	875	475	479	488
85°	139	131	140	145	145
90°	41	31	34	48	29
95°	63	68	74	74	68
115°	204	208	211	213	211
125°	289	293	294	297	297
135°	374	376	377	380	382
145°	451	453	451	455	459
155°	510	511	511	515	518
165°	554	554	554	5558	561
175°	578	575	577	581	585
180°	582	582	582	582	582

LUMEN OUTPUT:

Direct/Semi-Direct (D9)

D1 ON PREVIOUS PAGE

		LO	MO	SO	HO
OLV-30:	lm	3275	4550	6075	8750
	w	48	68	94	138
OLV-40:	lm	5350	6500	9900	13800
	w	80	102	153	218

LUMEN MAINTENANCE

Designed to last with cool running mid-power LEDs projected to maintain 90% (L90) of their initial output for 100,000 hours (at HO), and L70 exceeding 150,000 hours.

LED SYSTEM LED modules and drivers are field replaceable.

PROG Programmable light output. Specify desired lumens or watts, consult factory for min and max on Sky Oculus Series.

LABELS CSA and ETL damp labeled and I.B.E.W. manufactured.

ELECTRICAL Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers.

CONSTRUCTION

Housing Extruded aluminum, rolled and welded, >25% PC recycled, 100% recyclable

Lens Flat acrylic, 100% recyclable.

Weight OLV-30 = 40 lbs OLV-40 = 55 lbs

MOUNTING Surface or suspended by aircraft cables, top-swivel stems.

WARRANTY Single-source, 5 year limited warranty covers standard components and construction.



FINISH COLORS

STANDARD:

TMW — Textured Matte White	YGW — Gloss White
----------------------------	-------------------

PREMIUM:


YSW — Seashell White (Matte)	YRG — Rain Grey (Gloss)
YPE — Pewter (Matte)	YSTM — Storm Grey (Matte)
YBK — Black (Matte)	YBB — Black (Semi Gloss)
YSKM — Sky (Matte)	YMB — Military Blue (Matte)
YSAM — Sapphire (Matte)	YIB — Interstate Blue (Matte)
YBR — Bronze (Matte)	YSRM — Sunset Red (Matte)
YOR — Orange (Matte)	YDAM — Daffodil (Matte)
YFGM — Forest Green (Matte)	YSL — Silver (Metallic)
LUXE METALLICS:	
YCP — Copper Penny (Metallic)	YGN — Gold Nugget (Metallic)
YBZ — Bronze (Metallic)	

Choose from one of our Premium Colors with no set-up fee.

For paint chip samples, please email: info@prulite.com



MOUNTING LOCATIONS

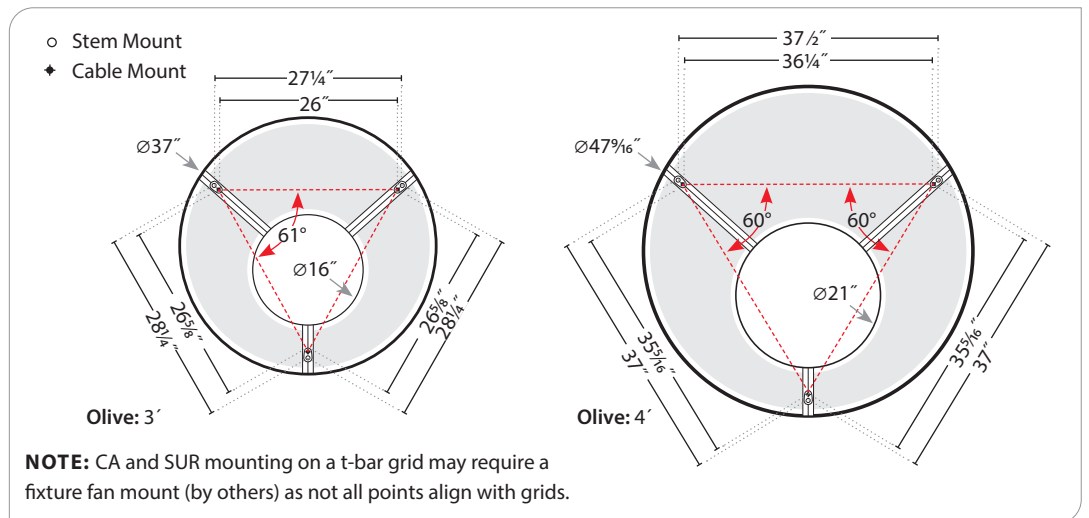


MOUNTING OPTIONS

MPCA Monopoint Mounting:




3 Cables Min. 18" from Ceiling
NA on 4'

CA Aircraft Cable & SSC: Top-Swivel Stem Mount:




Canopies: 5.5" Wide

3RPM: Round Cast Aluminum Canopy 3RPM: 3', 4' (3 Cables)

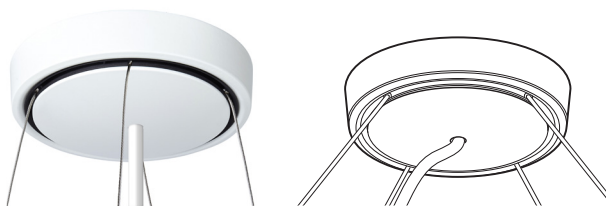


3SPM: Square Cast Aluminum Canopy 3SPM: 3', 4' (3 Cables)

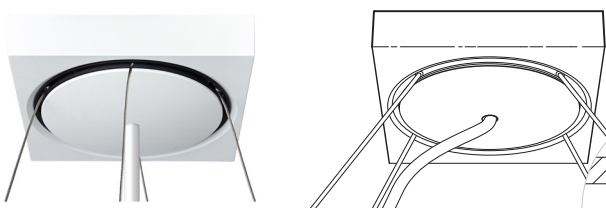

NOTE: Canopies cannot mount directly to t-bar grids

RTK: REMOTE TEST KIT



EMHE
Remote Battery Light

NOTE: Provided with 3' flex

SUR — STANDOFF

