


## **GENERAL NOTES:**

- Supports maximum weight of 50 lbs.
- Mounting strap will accommodate a 3<sup>°</sup> and 4<sup>°</sup> octagonal electrical box or 4<sup>°</sup> square box with plaster ring.
- 1. Use  $(2x) #8-32 x \frac{7}{8}$  screws to attach mounting strap to electrical box.
- Screw ball swivel to one end to one end of threaded stem.
  Secure in place with set screw. Insert other end of stem through hole in canopy and fasten to fixture with <sup>3/2</sup> IPS lock buts and washers.
- 3. Run wires through stem and raise fixture assembly to ceiling. Insert ball swivel into mounting strap.
- 4. Make all wiring connections per national and local building code requirements. Hand press canopy onto mounting straps.

**CAUTION:** Field cutting and rethreading of stem provided by Prudential Ltg is not authorized and will void the factory warranty. Consult factory if different stem sizes are required

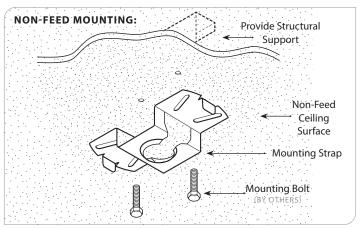

PART NUMBER	DESCRIPTION	QTY
100-00050-14	#8-32 x <sup>7</sup> / <sub>8</sub> Truss Head Screw	2
39157	#14 Gauge Mounting Strap	1
100-00130-08	¾″ ISP Ball Swivel	1
100-00103-08	1/4" ISP Ball Swivel (For 1/4" Stem Only)	1
100-00085-07	1" x 5¼" Diameter Canopy	1
100-00008-14	#10 ¼″ x %6″ Plain Washer	2
100-00013-14	¾″ Lock Nut	2
100-00231-14	¼″ Lock Nut (For ¼″ Stem Only)	1
100-0005-08	Body Sway Adapter (For ¾ Stem Only)	1

## IPS STEM

76847	6" Long (Threaded Ends)	76851	36" Long (Threaded Ends)
76848	12" Long (Threaded Ends)	76852	48" Long (Threaded Ends)
76849	18" Long (Threaded Ends)	76853	60" Long (Threaded Ends)
76850	24" Long (Threaded Ends)	76854	72 <sup>"</sup> Long (Threaded Ends)
77353	30" Long (Threaded Ends)	76855	96" Long (Threaded Ends)

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.

