
Gaze | Pendant, Surface & Wall

Hard Edge, Square

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360



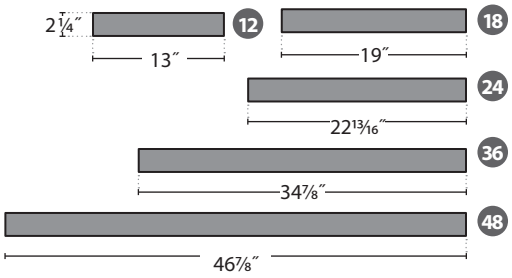

LAMINATE FINISH OPTIONS



SPOOL



SOFT EDGE

CLICK TO LEARN MORE

SINGLE STEM (SSC)



Gaze Hard Edge, clean and minimal form.

Gaze promises smooth, even diffusion of light, and is also available with a distinctively curved, undeniably refined Soft Edge or the elegantly soft form of Spool with a subtle .75″ regress. Gaze Hard Edge has a narrow 2.25″ profile, ADA compliant when wall mounted. Round and Square.

SOCIAL MEDIA KIT | BABAA BUILD AMERICA BUY AMERICA ACT | Declare. | 5 YEAR LED WARRANTY | LED Details | Made in the USA

Lumen output may vary +/- 5% 3500K used for lm/ft estimates above 4000K +2% llf, 3000K –2%, 2700K –4% -10% LLF for 90 CRI (4K, 3500K and 3K)

NOTE: Combine D1 and D9 IES files or see page 3 lumen chart

LUMEN OUTPUT:

SMART SPECS

D1 DIRECT		LO	MO	SO	HO
12:	lm	800	1250	1700	2300
	w	11	17	24	30
18:	lm	1550	2900	4225	5550
	w	13	24	35	48
24:	lm	2200	4050	5875	7675
	w	19	35	52	69
36:	lm	5000	9050	13100	16725
	w	43	81	121	165
48:	lm	6200	10500	17000	20700
	w	58	99	168	218

D9 INDIRECT ONLY (12″ D9 NOT AVAILABLE EXCEPT SURS-LO)		LO	MO	SO	HO
18 & 24:	lm	550	1425	2200	2825
	w	7.5	18	30	41
36 & 48:	lm	1200	2400	4800	6650
	w	16	34	69	99

SERIES	SIZE	LED COLOR	OUTPUT	FIXTURE COLOR / LAMINATE FINISH	LAMINATE CANOPY COLOR	DISTRIBUTION	CIRCUITING	VOLTAGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
Gaz-eSQH			—									
Square Hard Edge	12 18 24 36 48	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI LED5-90 90CRI	LO Low MO Medium SO Standard HO High (Static White Only) PROG Programmable Light Output (Specify desired lm or w/ fixture) **NOTE:** Specify separate output Down/Up if desired eg. LO/HO (Low Down, High Up)	TMW Textured Matte White (Standard) YGW Gloss White Y__ Premium Color CC__ Custom Color *LUXE METALLICS:* YBZ Bronze YCP Copper Penny YGN Gold Nugget **NOTE:** All canopies painted White (TMW) unless specified otherwise. **LAMINATE FINISHES** **(SPECIFY CANOPY COLOR IN NEXT COLUMN ➡)** LOK Vara Oak LEW Evreux Walnut LOG Oxidized Gold LOB Oxidized Black L__ Special Order Laminate (EXTENDED LEAD TIMES) **NOTE:** For Laminate finishes Top Plate + Stem is YBK Matte Black except for LOK and LLW it will be TMW White.	**(SKIP THIS COLUMN IF LAMINATE FINISH IS NOT SELECTED)** TMW Textured Matte White (Standard) YGW Gloss White Y__ Premium Color CC__ Custom Color *LUXE METALLICS:* YBZ Bronze YCP Copper Penny YGN Gold Nugget **NOTE:** All canopies painted White (TMW) unless specified otherwise.	D1 Direct D9 Direct / Indirect or Semi-Direct (**SURS-D9**: Indirect LO Output ONLY; 12″ available as SURS ONLY – MUST BE SOLO or SODA)	SC Single Circuit DC Dual Circuit (NA - 12″)	UNV (120-277) 347	CA48″, 96″ or 144″ Aircraft Cable (Adjustable) RPM 48″, 96″ or 144″ Round Cast Aluminum Canopy SPM 48″, 96″ or 144″ Square Cast Aluminum Canopy SURF Surface Flush (D1 only) SURS Surface Stand-off (**SURS-D9**: LO Output ONLY) PAC-R/S 96″ Powered Aircraft Cable Round/ Square Canopy, Direct canopy mount, X3 only (See page 8) **NA with some configurations** RPAC-R/S Remote Powered Aircraft Cable Round/Square Canopy **NA with some configurations or 2 Remote Boxes may be needed.** RSC* Rigid Stem Center SSC* Swivel Stem Center (*Specify length [Length refers to actual stem length not overall length]; SSC Canopy Round ONLY; NA 12″ D9) EXCPF Exposed Conduit Surface (X3 Only) EXCPS Exposed Conduit Surface Standoff (X3 Only)	X1-ON T-Bar X1-OFF T-Bar X3 Hard Ceiling	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED or Equal (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE CA T20 Emergency Battery (800 delivered lumens) **12+18:** Remote ONLY **RPAC-EMHE** often requires TWO Remote boxes, consult factory (See page 8) EMHE-RTK Remote EMHE with Remote Test Kit ETS-DR Iota ETS-DR Emergency Transfer Switch **SENSORS:** FM-105 Wattstopper H164 Hidden Frequency Occupancy Sensor (NA - 12″)

SEE PAGE 2 FOR REMOTE BOX OPTIONS

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.


Gaze | Pendant, Surface & Wall
Hard Edge, Square

PRUDENTIAL LTG.
PRULITE.COM 213.746.0360


REMOTE BOX FOR RPAC — REMOTE POWER OVER AIRCRAFT CABLES

REMOTE BOX TYPE:

DBS—SINGLE




DBD—DOUBLE




X1 T-BAR REMOTE BOXES (PLENUM ACCESS)

X3 FLANGED HARD CEILING REMOTE BOXES



X7 MUD-OVER FLANGE

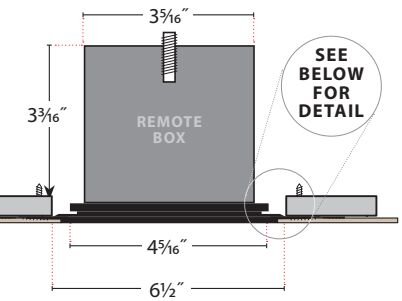


REQUIRED FOR QUOTING: **PRU WILL COMPLETE:**


SERIES	REMOTE BOX TYPE	REMOTE BOX COLOR	EMERGENCY	OPTIONS	LENGTH	LINE VOLTAGE LOCATION	POWER FEED (NOT FOR X1)	MOUNTING
REMBOX						—	0	NOMT
Remote Box	DBS Deco Surface Box Single DBD Deco Surface Box Double **NOTE:** Double used when drivers & Emergency don't fit in Single, factory will typically determine when ordering X1 All T-Bar Ceilings X3 Hard Ceilings with Flange (Does not typically need this spec sheet filled out) X7 Hard Ceilings with Mud-over Flange	NA X1 T-bar boxes are pre-painted, DO NOT designate paint color TMW Textured Matte White (Standard) YGW Gloss White Y__ Premium Color CC Custom Color **NOTE:** Visible parts only	EMHE CA T20 Emergency Battery ETS-DR Iota ETS-DR Emergency Transfer Switch EMC Emergency Circuiting	OMB Overhead Mounting Bracket (X3 & X7 Only) Consult factory for Sensors installed in Remote Box	2′ (Standard) 4′ Custom	(DBS/DBD ONLY) LEFT: RIGHT: 0 0 1 1 2 2 **NOTE:** Left is indicated by power or mount holes on cover	0	NOMT (Fixture DOES NOT mount to remote box, X1 T-Bar always NOMT)

REMOTE BOX OPTIONS

OMB (OVERHEAD MOUNTING BRACKET)
(2 Per Remote Box) Optional mounting for hard ceiling installs (X3, X7)

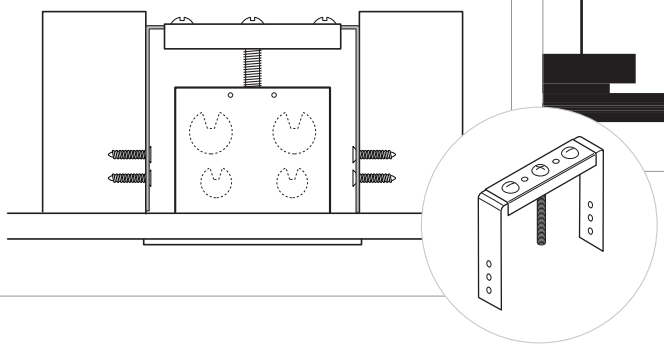


X7 DETAIL
MUD-OVER FLANGE

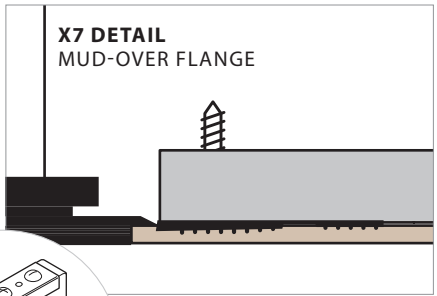

EXPOSED CONDUIT

EXCP DETAIL

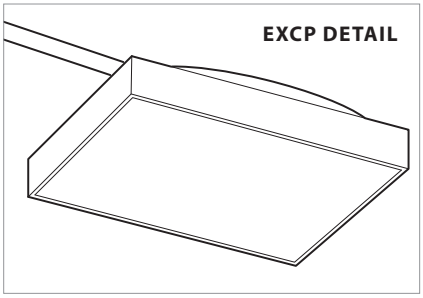

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.


Gaze | Pendant, Surface & Wall
Hard Edge, Square

PRUDENTIAL LTG.
PRULITE.COM 213.746.0360

D1 — DIRECT

GAZESQ-24-LED35-MO

4058 Delivered Lumens
35 Watts
118 lm/w



Zonal Lumen Summary:
0-90 (Down) = 100%

1430

Vertical Angle	0°	25°	45°	65°	90°
0°	1430	1430	1430	1430	1430
5°	1423	1423	1422	1423	1422
15°	1372	1372	1371	1372	1371
25°	1271	1272	1271	1271	1270
35°	1126	1127	1126	1126	1125
45°	947	947	946	946	946
55°	736	736	735	735	736
65°	389	389	390	389	389
75°	206	206	206	206	206
85°	51	51	52	52	52
90°	0	0	0	0	0


D9 DIRECT/INDIRECT ONLY
(12″ D9 NOT AVAILABLE EXCEPT SURS-LO)

		LO	MO	SO	HO
18:	lm	2100	4325	6425	8375
	w	20.5	42	65	89
24:	lm	2750	5475	8075	10500
	w	26.5	53	82	110
36:	lm	6200	11450	17900	23375
	w	59	115	190	264
48:	lm	7400	12900	21800	27350
	w	74	133	237	317

D9 — DIRECT / INDIRECT

GAZESQ-36-LED35-MO-D9

11450 Delivered Lumens
115 Watts
108 lm/w



Zonal Lumen Summary:
0-90 (Down) =79%
90-180 (Up) = 21%

3157

Vertical Angle	0°	25°	45°	65°	90°
0°	3157	3157	3157	3157	3157
5°	3142	3144	3144	3144	3142
15°	3033	3034	3033	3033	3031
25°	2819	2820	2816	2817	2814
35°	2507	2506	2502	2502	2499
45°	2114	2112	2107	2106	2105
55°	1650	1648	1644	1642	1640
65°	1137	1134	1132	1130	1129
75°	609	605	605	606	606
85°	162	161	163	164	164
90°	0	0	0	0	0
95°	25	24	23	21	21
115°	230	229	235	246	248
125°	375	377	379	392	396
135°	519	524	524	529	535
145°	653	655	656	654	656
155°	757	759	760	757	756
165°	825	829	830	828	827
175°	860	862	862	861	861
180°	865	865	865	865	865

LUMEN MAINTENANCE

L70 — 200,000+ Hours
L90 — 100,000+ Hours
(LO, MO & SO)
L90 — 60,000+ Hours (HO)

LED SYSTEM Drivers are field replaceable.

PROG (OPTIONAL) Programmable light output. Specify desired lumens or watts per fixture.

LABELS CSA and ETL damp labeled and I.B.E.W. manufactured.

MOUNTING Surface or suspended by aircraft cables, cast aluminum canopy or stem mounted.

ELECTRICAL

Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. Max driver size 1.65″ w x 1.25″ h.

CONSTRUCTION

Housing Extruded aluminum, rolled and welded, >25% PC recycled, 100% recyclable.

Lens Edge Lit Wave Guide with Secondary Acrylic Diffuser.

Weight 12: 9lbs 18: 21lbs 24: 28lbs 36: 54lbs 48: 100lbs

WARRANTY

Single-source, 5 year limited warranty covers standard components and construction.

FINISH COLORS

STANDARD:

TMW — Textured Matte White

YGW — Gloss White

PREMIUM:

YSW – Seashell White (Matte)
YPE – Pewter (Matte)
YRG – Rain Grey (Gloss)
YSTM – Storm Grey (Matte)
YBK – Black (Matte)
YBB – Black (Semi Gloss)
YSKM – Sky (Matte)
YMB – Military Blue (Matte)
YSAM – Sapphire (Matte)
YIB – Interstate Blue (Matte)
YBR – Bronze (Matte)
YSRM – Sunset Red (Matte)
YOR – Orange (Matte)
YDAM – Daffodil (Matte)
YFGM – Forest Green (Matte)

LUXE METALLICS:

YSL – Silver (Metallic)
YCP – Copper Penny (Metallic)
YBZ – Bronze (Metallic)
YGN – Gold Nugget (Metallic)

Choose from one of our Premium Colors with no set-up fee. For paint chip samples, please email: **info@prulite.com**

LAMINATE FINISHES:

STANDARD:

LOK – Vara Oak
LEW – Evreux Walnut
LOG – Oxidized Gold
LOB – Oxidized Black

SPECIAL ORDER (EXTENDED LEAD TIMES):

LKK – Dark Oak
LMD – Medium Walnut
LLW – Light Walnut
LCP – Oxidized Copper
LCF – Carbon Fiber
LRL – Red Leather
LGR – Grey Suede



NOTE: For Laminate finishes Top Plate + Stem is YBK Matte Black except for LOK and LLW it will be TMW White.


Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.

Gaze | Pendant, Surface & Wall
Hard Edge, Square


PRUDENTIAL LTG.
PRULITE.COM 213.746.0360

MOUNTING OPTIONS

CA Cable



RPM/SPM Canopies




SURF Surface Flush




SURS Surface Standoff



PAC Powered Aircraft Cable




SSC Center Stem




NOTE: 12″,18″ + 24″ = 4 Cables


EXCPF Exposed Conduit Surface





EXCPS Exposed Conduit Surface Standoff




CA CABLE MOUNTING DIMENSIONS








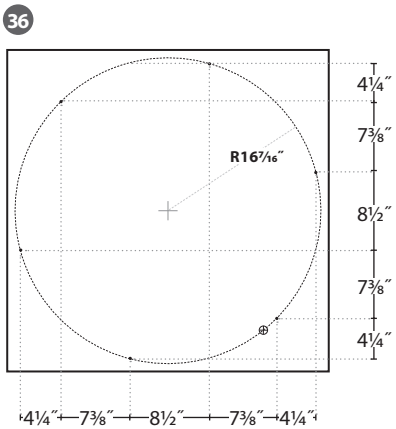

⊕ ⅞″ K.O. for Cord Drop


• Mounting Locations

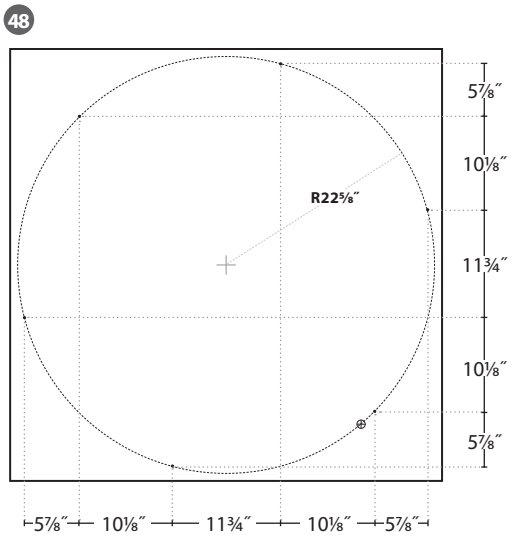

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.


RPM/SPM CANOPY MINIMUM MOUNTING HEIGHT

HARD EDGE

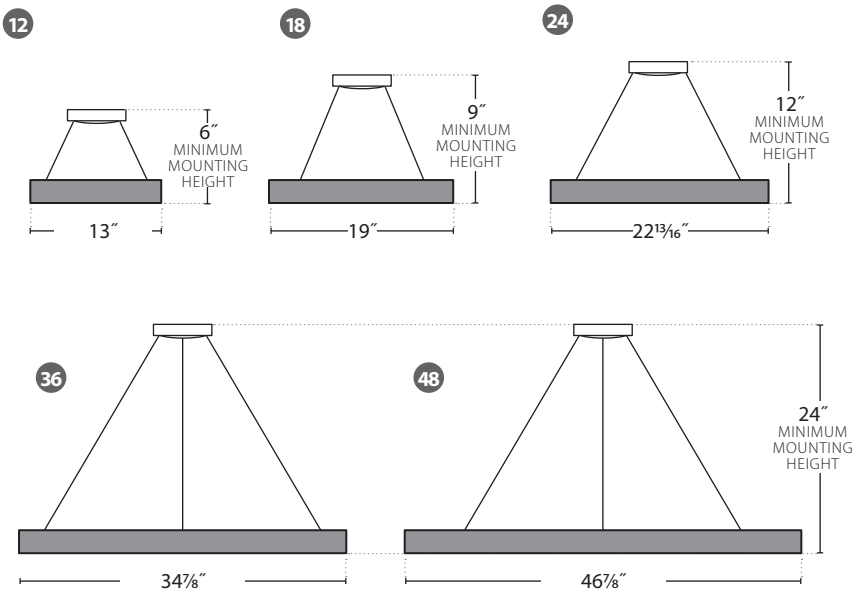


CAST ALUMINUM CANOPIES

RPM48″, 96″ or 144″:
Round Cast Aluminum Canopy




SPM48″, 96″ or 144″:
Square Cast Aluminum Canopy



SSC IR 16-9 MINIMUM MOUNTING HEIGHT

NOTE: Minimum mounting height for California DSA IR 16-9 45˚ swing requirements

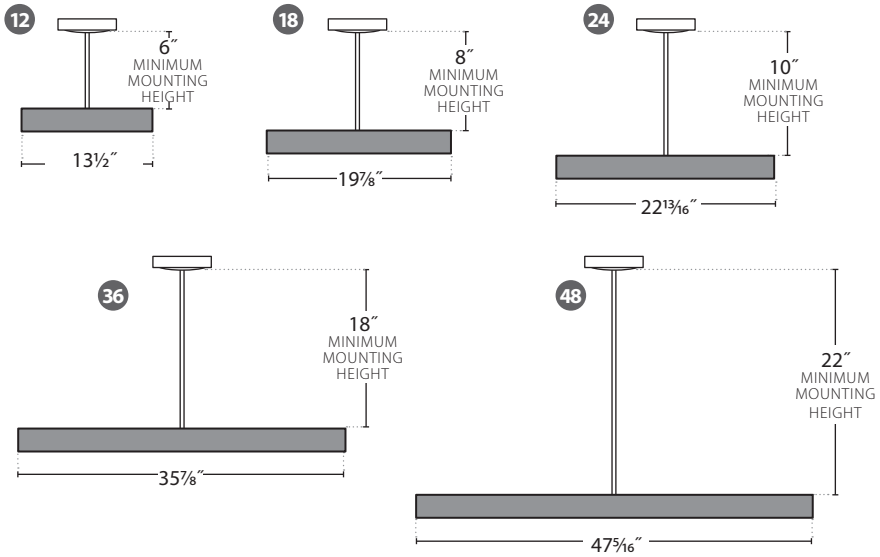

SSC CANOPY DETAIL






Allows for sloped ceilings up to 30°
SSC Canopy Round ONLY


Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.

Gaze | Pendant, Surface & Wall
Hard Edge, Square


SURFACE / SURFACE STANDOFF (CEILING OR WALL) MOUNTING DIMENSIONS

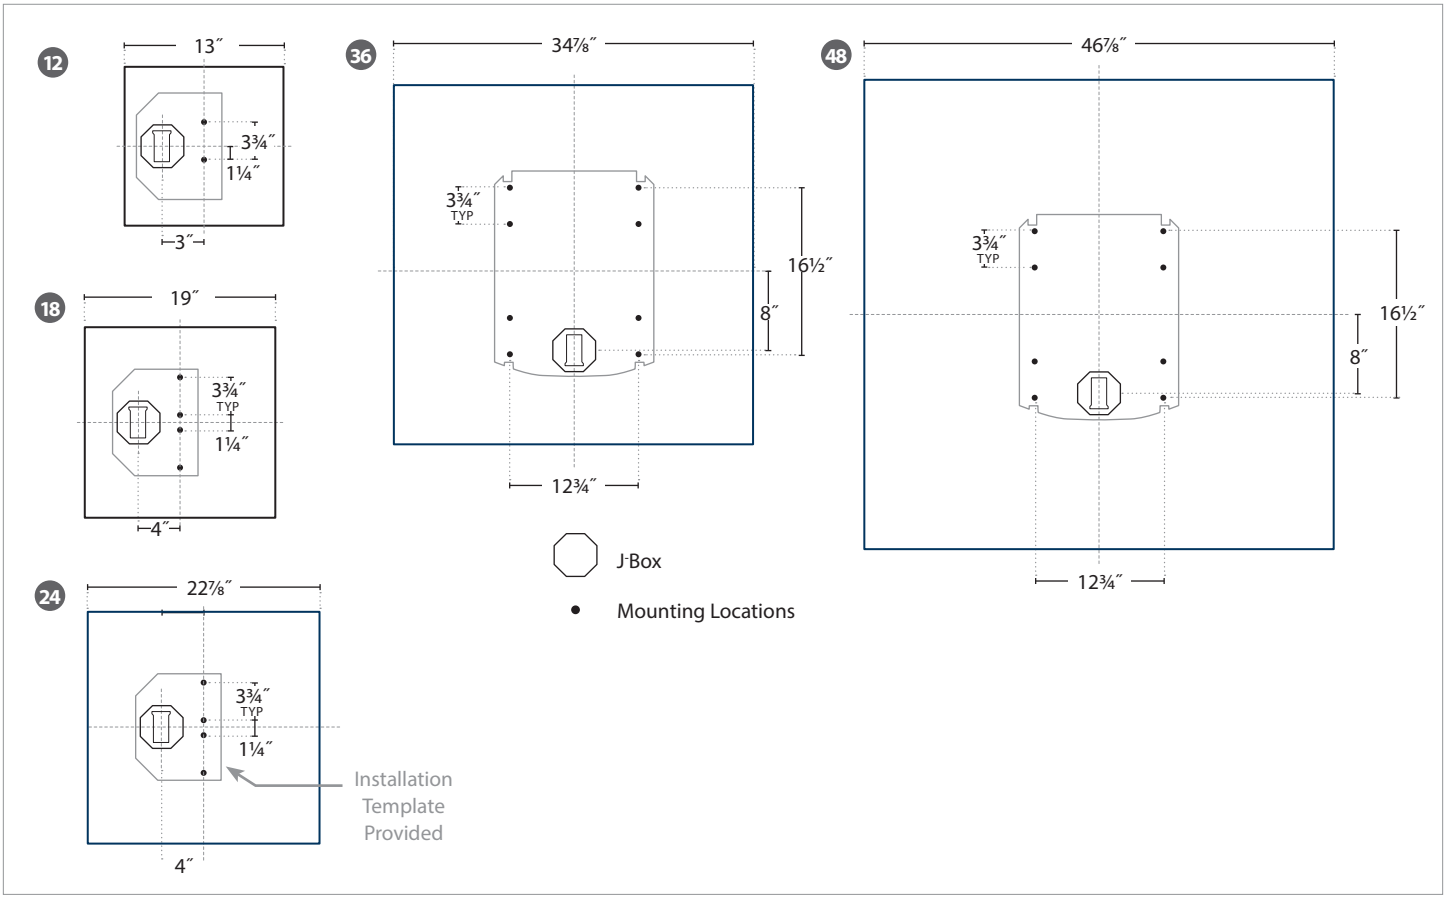


SURFACE STANDOFF DIMENSIONS

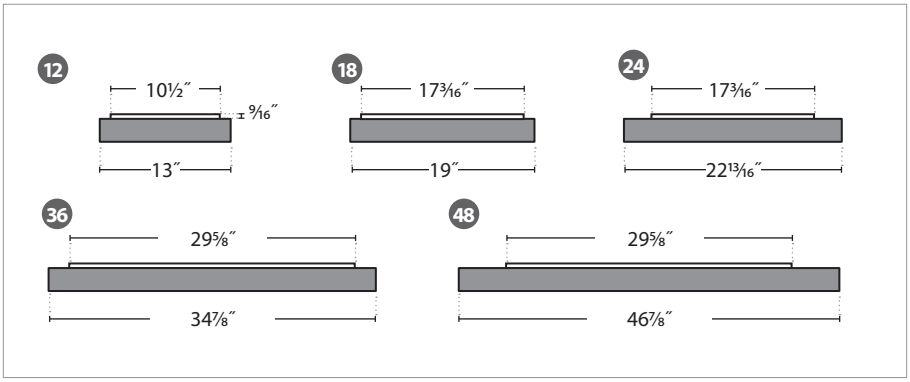

EMHE TEST LIGHT

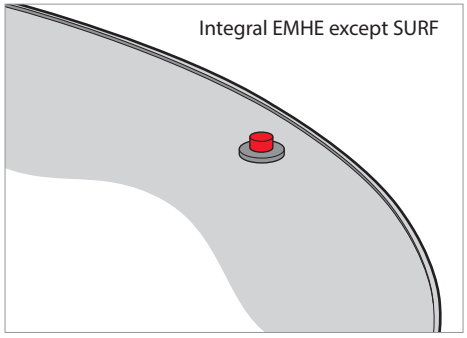

RTK: REMOTE TEST KIT

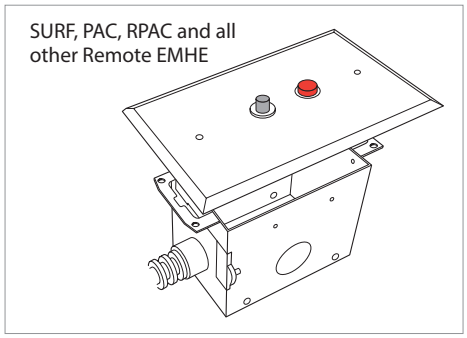



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.


Gaze | Pendant, Surface & Wall
Hard Edge, Square

PRUDENTIAL LTG.
PRULITE.COM 213.746.0360






SOFT EDGE






HARD EDGE



Gaze Acoustic



Gaze Acoustic fixtures offer effective noise reduction with an intentional approach to design. Alternate with coordinating light fixtures for maximum visual appeal in open spaces.



12″ Available




Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.

Gaze | Pendant, Surface & Wall
Hard Edge, Square

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

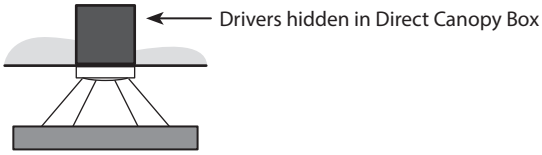

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** PAC-R/S

REMOTE BOX TYPE: DIRECT CANOPY MOUNT **TABLE:** SHOWS WHEN AVAILABLE AND DRIVER LIMITATIONS

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
18	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	⊖	⊖	⊖	⊖
24	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	⊖	⊖	✗	✗	✗
36	✓	⊖	⊖	⊖	⊖	✓	⊖	⊖	⊖	⊖	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
48	✓	⊖	⊖	⊖	✗	⊖	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗

✓ **AVAILABLE** ✗ **NOT AVAILABLE** ⊖ **AVAILABLE WITH OSRAM DRIVERS ONLY**

POWER CONFIGURATION: EMERGENCY BATTERY **MOUNTING:** CA, RPM, SPM, SURFACE

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS WHEN REMOTE BOX IS REQUIRED AND BOX SIZE

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′
18	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′
24	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
36	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]
18	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′
24	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′
36	2′	2′	2′	2′	2′	2′	2′	2′	4′	4′	2′	4′	4′	4′	N/A[b]	4′	4′	4′	4′	N/A[b]
48	2′	2′	2′	2′	4′	2′	2′	4′	4′	N/A[b]	4′	4′	4′	4′	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE WITH EMHE **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]
18	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	4′
24	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	4′	2′	2′	4′	4′	4′
36	2′	2′	2′	4′	4′	2′	4′	4′	4′	N/A[c]	4′	4′	4′	N/A[c]	N/A[b]	4′	N/A[c]	N/A[c]	N/A[c]	N/A[b]
48	2′	2′	4′	4′	4′	4′	4′	4′	N/A[c]	N/A[b]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]

N/A[a]— Indirect Not Available | **N/A[b]**— Exceeds Number of Drivers Allowed for RPAC | **N/A[c]**— Exceeds Amperage Allowed for this Configuration

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: DECO SURFACE BOX SINGLE (DBS) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	2′	N/A[a]	N/A[a]	N/A[a]	N/A[a]
18	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	4′
24	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	2′	4′	2′	2′	4′	4′	4′
36	2′	2′	2′	4′	4′	2′	4′	4′	4′	4′	4′	4′	4′	4′	N/A[b]	4′	N/A[c]	N/A[c]	N/A[c]	N/A[c]
48	2′	2′	4′	4′	4′	4′	4′	4′	N/A[c]	N/A[b]	4′	N/A[c]	N/A[c]	N/A[c]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (WITH EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: DECO SURFACE BOX SINGLE (DBS) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	4′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	4′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	4′	N/A[a]	N/A[a]	N/A[a]	N/A[a]	4′	N/A[a]	N/A[a]	N/A[a]	N/A[a]
18	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	N/A
24	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	4′	N/A[c]	4′	4′	N/A[c]	N/A[c]	N/A[c]
36	4′	4′	4′	N/A[c]	N/A[c]	4′	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[b]	N/A	N/A	N/A	N/A	N/A[b]
48	4′	4′	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[c]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]	N/A[b]

N/A[a] — Indirect Not Available

N/A[b] — Exceeds Number of Drivers Allowed for RPAC


N/A[c] — Exceeds Amperage Allowed for this Configuration

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.


PRUDENTIAL LTG.
PRULITE.COM 213.746.0360

PACS AND RPACR CROSS SECTIONS

DIRECT CANOPY MOUNT (PAC) Canopy Driver Box — Driver access behind canopy

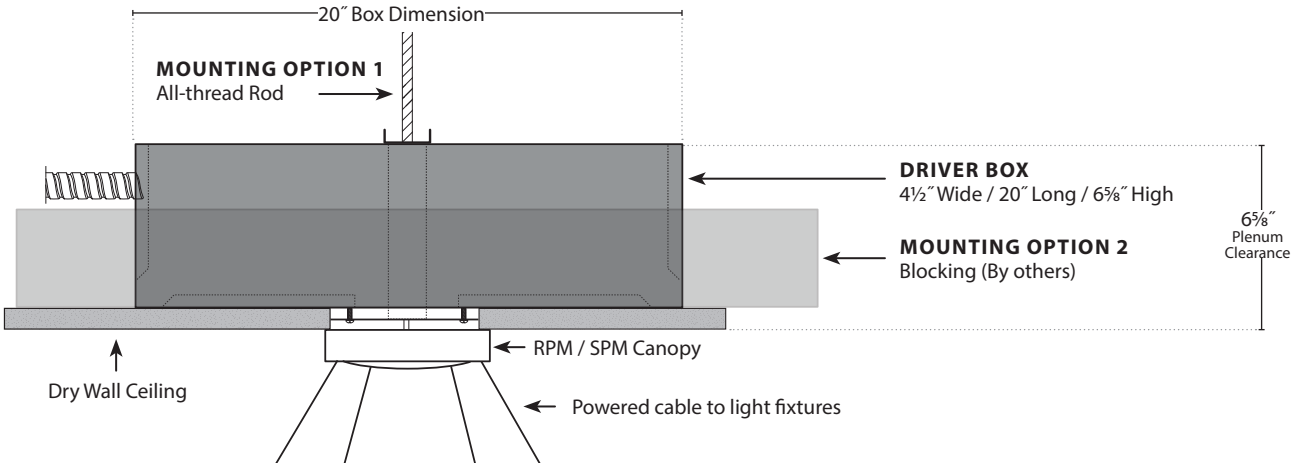


REMOTE (RPAC - X7, X3, X1): Remote Driver Box — Remote access required

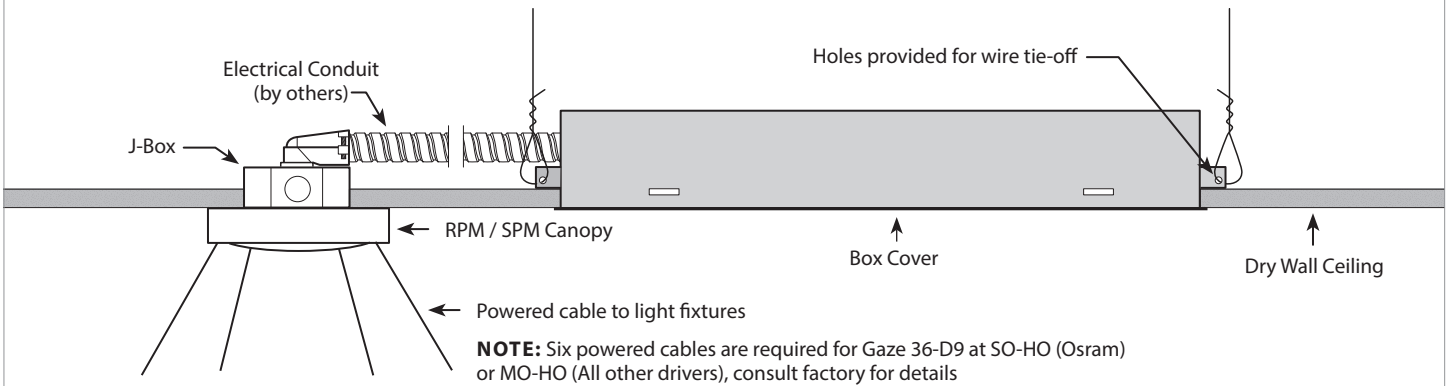


NOTE: Six powered cables are required for Gaze 36-D9 at SO-HO (Osram) or MO-HO (All other drivers), consult factory for details

DECO BOX DETAIL (DBS OR DBD)

SURFACE MOUNT J-BOX WITH SIDE FEED:

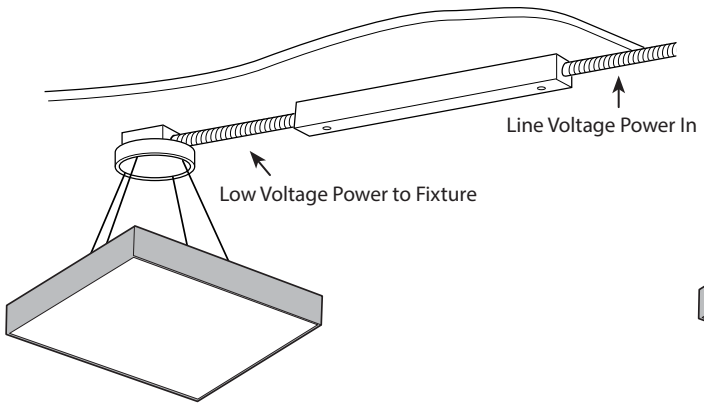

RECESSED J-BOX WITH TOP FEED:

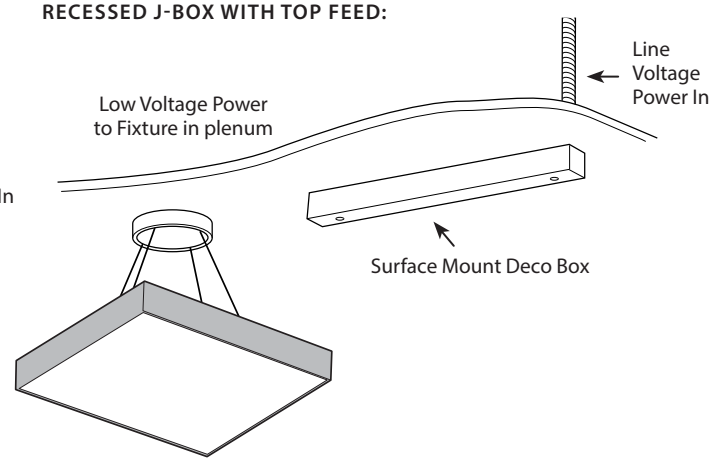



















Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.

Gaze | Pendant, Surface & Wall

Hard Edge, Square

PRUDENTIAL LTG.
PRULITE.COM 213.746.0360

LM79 & TM30 DATA:

	MEASURED CCT	MEASURED LUMENS	CRI	R9	DuV	SPD	TM30 — COLOR VECTOR	TM30 — COLOR DISTORTION
LED27	2680	80%	93	58	0.001			
LED3	3042	95%	82	6	0.001			
LED3-90	3016	85%	93	61	0.000			
LED35	3482	100%	82	3	0.002			
LED35-90	3417	85%	93	67	0.000			
LED4	3952	102%	82	4	0.003			
LED4-90	3882	85%	92	67	0.003			
LED5-90	4889	85%	94	84	0.002			

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.