


Gaze | Pendant, Surface & Wall Spool, Square






PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

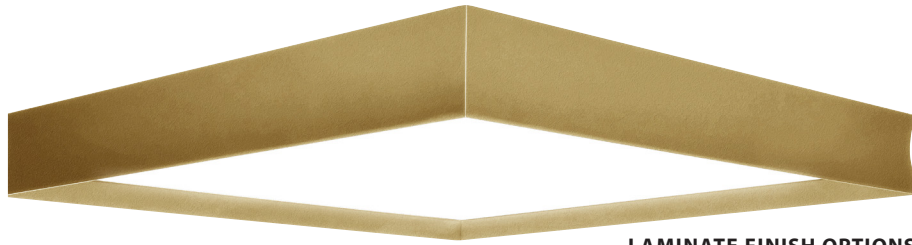

LAMINATE FINISH OPTIONS



SOFT EDGE

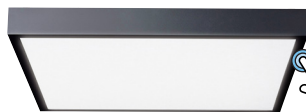

HARD EDGE

CLICK TO LEARN MORE

SINGLE STEM (SSC)



D1 DIRECT		LO	MO	SO	HO
12:	lm	800	1250	1700	2300
	w	11	17	24	30
18:	lm	1550	2900	4225	5550
	w	13	24	35	48
24:	lm	2200	4050	5875	7675
	w	19	35	52	69

D9 INDIRECT ONLY
(12" D9 NOT AVAILABLE EXCEPT SURS-LO)

		LO	MO	SO	HO
18 & 24:	lm	550	1425	2200	2825
	w	7.5	18	30	41

SMART SPECS

Gaze Spool, elegantly soft form, subtle regress.

Gaze promises smooth, even diffusion of light, and is also available in a clean Hard Edge or a distinctively curved, undeniably refined Soft Edge. Gaze Spool has a 3" profile, subtle .75" regress. Round and Square.



Lumen output may vary +/- 5%
3500K used for lm/ft estimates above
4000K +2% llf, 3000K -2%, 2700K -4%
-10% llf for 90 CRI (4K, 3500K and 3K)

NOTE: Combine D1 and D9 IES files or see page 3 lumen chart

SE-RIES	SIZE	LED COLOR	OUTPUT	FIXTURE COLOR / LAMINATE FINISH	LAMINATE CANOPY COLOR	DISTRI-BUTION	CIRCU-ITING	VOLT-AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS
Gaze SQSP			—									
Square Spool Edge	12 18 24	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI LED5-90 90CRI	LO Low MO Medium SO Standard HO High (Static White Only) PROG Programmable Light Output (Specify desired lm or w/ fixture) NOTE: Specify separate output Down/Up if desired eg. LO/ HO (Low Down, High Up)	TMW Textured Matte White (Standard) Y__ Premium Color CC__ Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget NOTE: All canopies painted White (TMW) unless specified otherwise. LAMINATE FINISHES (SPECIFY CANOPY COLOR IN NEXT COLUMN =>) LOK Vara Oak LEW Evreux Walnut LOG Oxidized Gold LOB Oxidized Black L__ Special Order Laminate (EXTENDED LEAD TIMES) NOTE: For Laminate finishes Top Plate + Stem is YBK Matte Black except for LOK and LLW it will be TMW White.	(SKIP THIS COLUMN IF LAMINATE FINISH IS NOT SELECTED) TMW Textured Matte White (Standard) YGW Gloss White Y__ Premium Color CC__ Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget NOTE: All canopies painted White (TMW) unless specified otherwise.	D1 Direct D9 Direct / indirect or Semi-Direct (SURS-D9: Indirect LO Output ONLY; T2" available as SURS ONLY - MUST BE SOLO or SODA)	SC Single Circuit DC Dual Circuit (NA - 12")	UNV (120-277) 347	CA48", 96" or 144" Aircraft Cable (Adjustable) RPM 48", 96" or 144" Round Cast Aluminum Canopy SPM 48", 96" or 144" Square Cast Aluminum Canopy SURF Surface Flush (D1 only) SURS Surface Stand-off (SURS-D9: LO Output ONLY) PAC-R/S 96" Powered Aircraft Cable Round/Square Canopy, Direct canopy mount, X3 only NA with some configurations RPAC-R/S Remote Powered Aircraft Cable Round/Square Canopy NA with some configurations or 2 Remote Boxes may be needed. SSC Center Stem (Specify length [Length refers to actual stem length not overall length]; SSC Canopy Round ONLY; NA 12" D9)	X1-ON T-Bar X1-OFF T-Bar X3 Hard Ceiling	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Lutron Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE CA T20 Emergency Battery (800 delivered lumens) 12+18: Remote Only RPAC-EMHE often requires TWO Remote boxes, consult factory EMHE-RTK Remote EMHE with Remote Test Kit ETS-DR Iota ETS-DR Emergency Transfer Switch SENSORS: FM-105 Wattstopper H164 Hidden Frequency Occupancy Sensor (NA - 12")

SEE PAGE 2 FOR REMOTE BOX OPTIONS

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Lighting, 1774 E. 21st Street, Los Angeles, CA 90058.



REMOTE BOX FOR RPAC — REMOTE POWER OVER AIRCRAFT CABLES

REMOTE BOX TYPE:


DBS - SINGLE

DBD - DOUBLE

**X1 T-BAR REMOTE BOXES
(PLENUM ACCESS)**

**X3 FLANGED HARD
CEILING REMOTE BOXES**

X7 MUD-OVER FLANGE

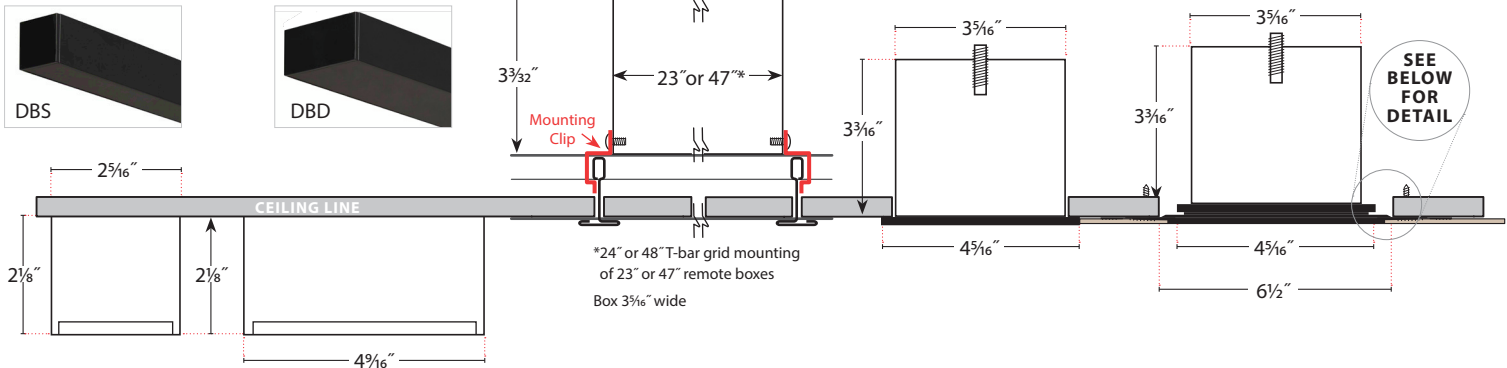

REQUIRED FOR QUOTING:



PRU WILL COMPLETE:

SERIES	REMOTE BOX TYPE	REMOTE BOX COLOR	EMERGENCY	OPTIONS	LENGTH	LINE VOLTAGE LOCATION	POWER FEED (NOT FOR X1)	MOUNTING
REMBOX						—	0	NOMT
Remote Box	DBS Deco Surface Box Single DBD Deco Surface Box Double NOTE: Double used when drivers & Emergency don't fit in Single, factory will typically determine when ordering X1 All T-Bar Ceilings X3 Hard Ceilings with Flange (Does not typically need this spec sheet filled out) X7 Hard Ceilings with Mud-over Flange	NA X1 T-bar boxes are pre-painted, DO NOT designate paint color TMW Textured Matte White (Standard) YGW Gloss White Y_ Premium Color CC Custom Color NOTE: Visible parts only	EMHE CA T20 Emergency Battery ETS-DR Iota ETS-DR Emergency Transfer Switch EMC Emergency Circuiting	OMB Over-head Mounting Bracket (X3 & X7 Only) Consult factory for Sensors installed in Remote Box	2' (Standard) 4' Custom	(DBS/DBD ONLY) LEFT: 0 RIGHT: 0 1 1 2 2 NOTE: Left is indicated by power or mount holes on cover	0	NOMT (Fixture DOES NOT mount to remote box, X1 T-Bar always NOMT)


REMOTE BOX OPTIONS

OMB (OVERHEAD MOUNTING BRACKET)

(2 Per Remote Box) Optional mounting for hard ceiling installs (X3, X7)

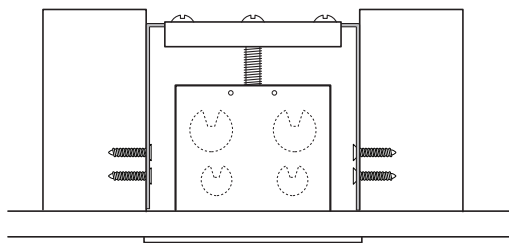

X7 DETAIL MUD-OVER FLANGE

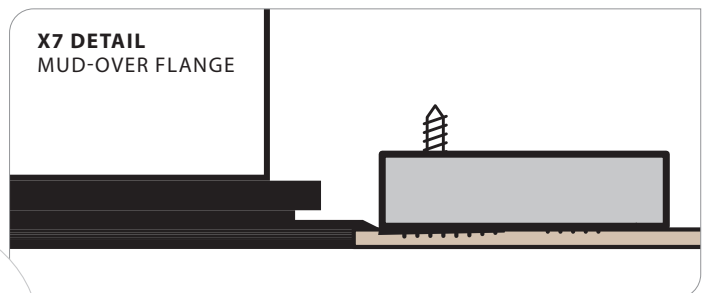

Gaze | Pendant, Surface & Wall Spool, Square



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


D1 — DIRECT

GAZESQ-24-LED35-MO

4058 Delivered Lumens

35 Watts

118 lm/w



1430

Zonal Lumen Summary:
0-90 (Down) = 100%

Vertical Angle	0°	25°	45°	65°	90°
0°	1430	1430	1430	1430	1430
5°	1423	1423	1422	1423	1422
15°	1372	1372	1371	1372	1371
25°	1271	1272	1271	1271	1270
35°	1126	1127	1126	1126	1125
45°	947	947	946	946	946
55°	736	736	735	735	736
65°	389	389	390	389	389
75°	206	206	206	206	206
85°	51	51	52	52	52
90°	0	0	0	0	0

D9 DIRECT/INDIRECT ONLY (12" D9 NOT AVAILABLE EXCEPT SURS-LO)

		LO	MO	SO	HO
18:	lm	2100	4325	6425	8375
	w	20.5	42	65	89
24:	lm	2750	5475	8075	10500
	w	26.5	53	82	110

LUMEN MAINTENANCE

L70 — 200,000+ Hours

L90 — 100,000+ Hours
(LO, MO & SO)

L90 — 60,000+ Hours (HO)

LED SYSTEM

Drivers are field replaceable.

PROG

(OPTIONAL)

Programmable light output. Specify desired lumens or watts per fixture.

LABELS

CSA and ETL damp labeled and I.B.E.W. manufactured.

MOUNTING

Surface or suspended by aircraft cables, cast aluminum canopy or stem mounted.

ELECTRICAL

Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. Max driver size 1.65" w x 1.25" h.

CONSTRUCTION

Housing

Extruded aluminum, rolled and welded, >25% PC recycled, 100% recyclable.

Lens

Edge Lit Wave Guide with Secondary Acrylic Diffuser.

Weight


12: 9lbs 18: 21lbs 24: 28lbs

WARRANTY














Single-source, 5 year limited warranty covers standard components and construction.

FINISH COLORS




STANDARD:



PREMIUM:




LUXE METALLICS:





Choose from one of our Premium Colors with no set-up fee. For paint chip samples, please email: info@prulite.com

LAMINATE FINISHES:

STANDARD:




SPECIAL ORDER (EXTENDED LEAD TIMES):




NOTE: For Laminate finishes Top Plate + Stem is YBK Matte Black except for LOK and LLW it will be TMW White.




MOUNTING OPTIONS

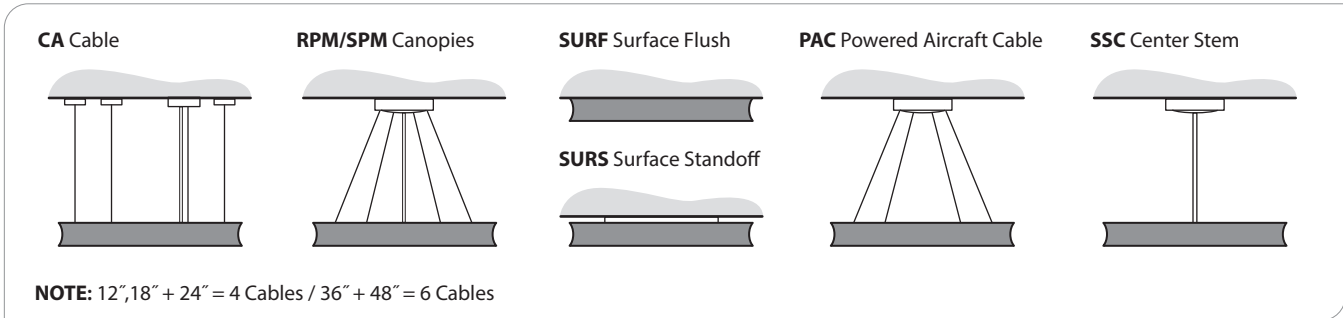


CA CABLE MOUNTING DIMENSIONS

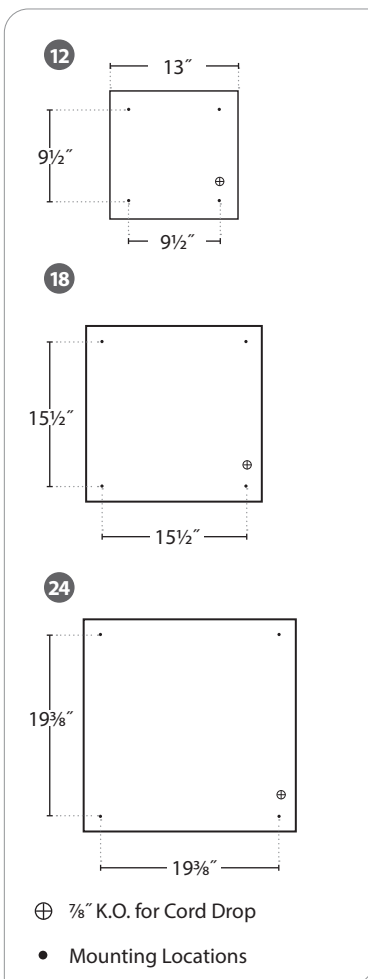

RPM/SPM CANOPY MINIMUM MOUNTING HEIGHT

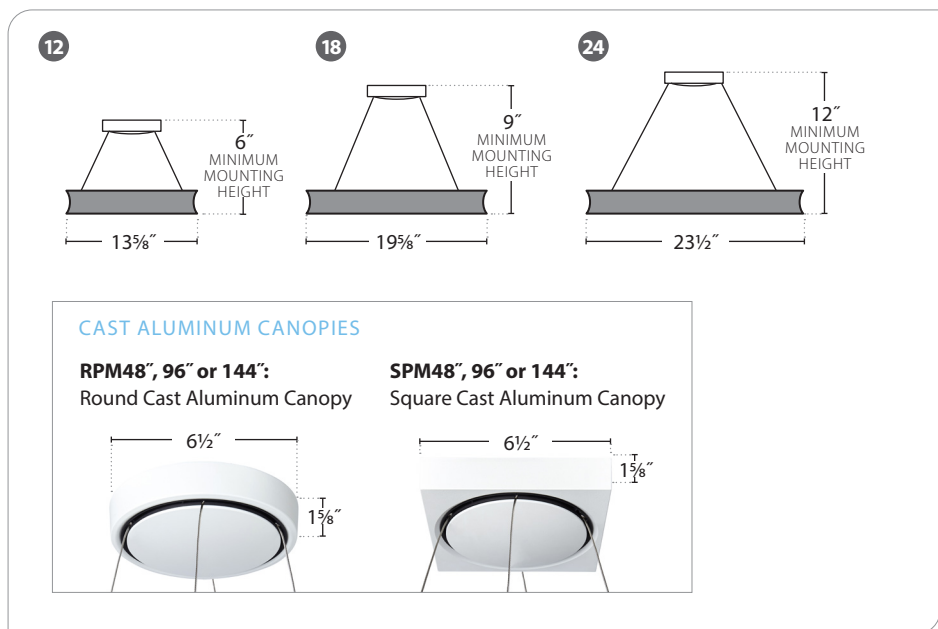


SSC IR 16-9 MINIMUM MOUNTING HEIGHT

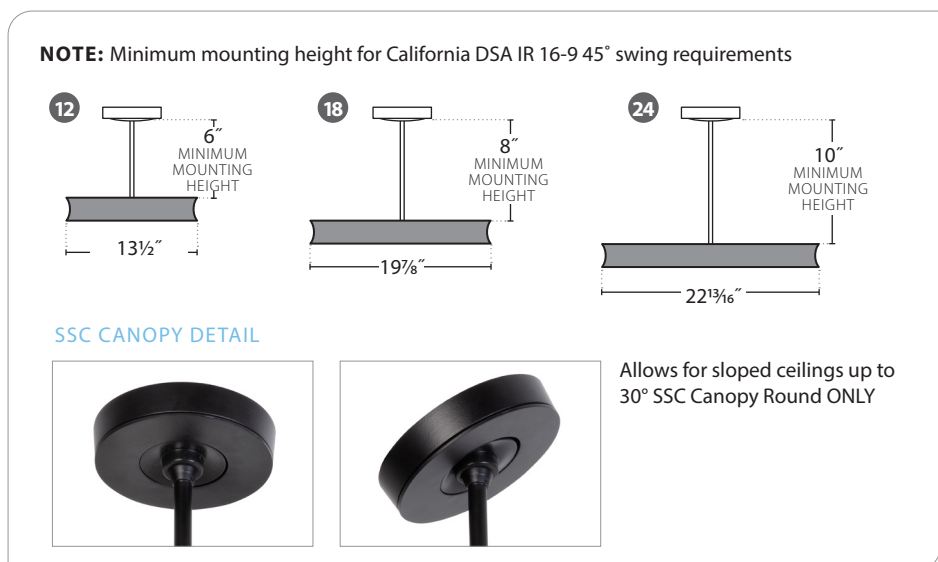





SURFACE / SURFACE STANDOFF (CEILING OR WALL) MOUNTING DIMENSIONS

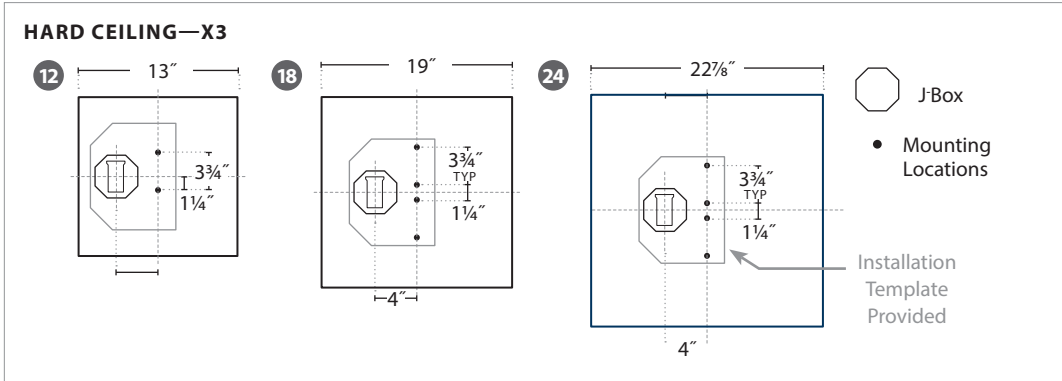


SURFACE / SURFACE STANDOFF MOUNTING DIMENSIONS

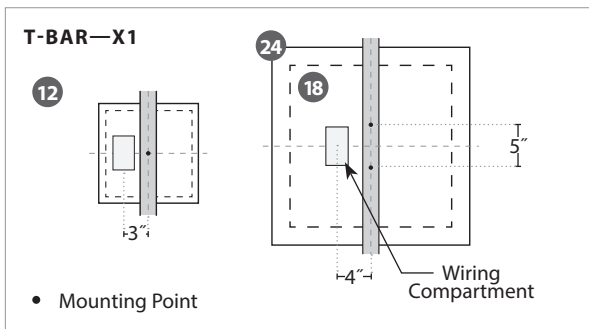


SURFACE STANDOFF DIMENSIONS

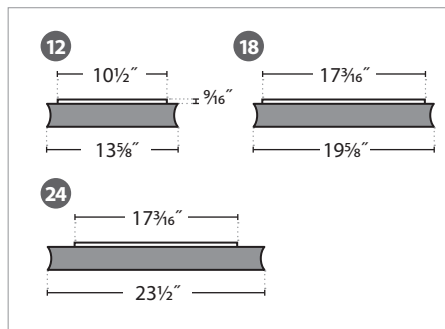

EMHE TEST LIGHT

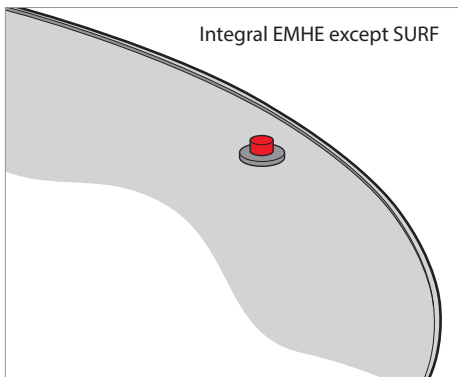

RTK: REMOTE TEST KIT

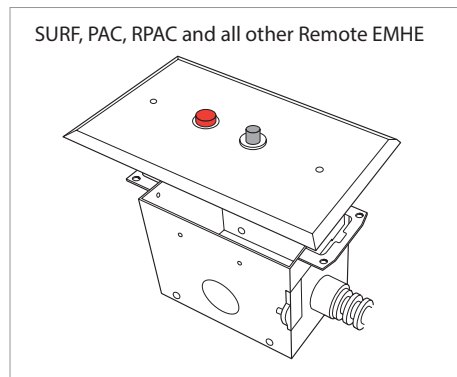

Gaze | Pendant, Surface & Wall Spool, Square




PRUDENTIAL LTG.



PRULITE.COM 213.746.0360



SOFT EDGE

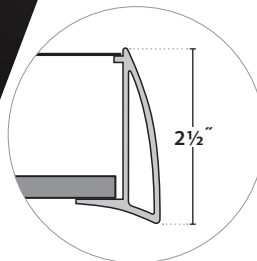


HARD EDGE

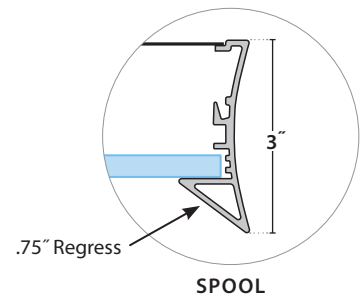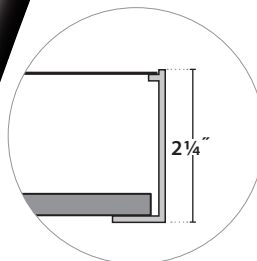


SPOOL

Gaze Acoustic

Gaze Acoustic fixtures offer effective noise reduction with an intentional approach to design. Alternate with coordinating light fixtures for maximum visual appeal in open spaces.

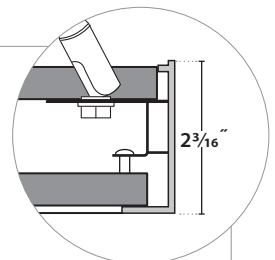

Gaze | Pendant, Surface & Wall Spool, Square

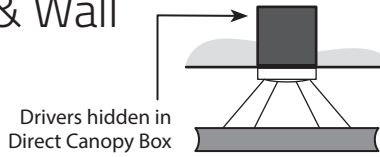

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** PAC-R/S

REMOTE BOX TYPE: DIRECT CANOPY MOUNT **TABLE:** SHOWS WHEN AVAILABLE AND DRIVER LIMITATIONS

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO	
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	
12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
18	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	—	—	—	—	—
24	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	—	—	✗	✗	✗

✓ AVAILABLE ✗ NOT AVAILABLE — AVAILABLE WITH OSRAM DRIVERS ONLY

POWER CONFIGURATION: EMERGENCY BATTERY **MOUNTING:** CA, RPM, SPM, SURFACE

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS WHEN REMOTE BOX IS REQUIRED AND BOX SIZE

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO	
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	
12	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'
18	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'
24	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a
18	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'
24	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE WITH EMHE **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: X1, X3, X7, DECO SURFACE BOX DOUBLE (DBD) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a
18	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	4'
24	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	4'	2'	2'	4'	4'	4'

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (NO EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: DECO SURFACE BOX SINGLE (DBS) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	2'	N/A ^a	N/A ^a	N/A ^a	N/A ^a
18	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	4'
24	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	2'	4'	2'	2'	4'	4'	4'

POWER CONFIGURATION: POWER OVER AIRCRAFT CABLE (WITH EMHE) **MOUNTING:** RPAC-R/S

REMOTE BOX TYPE: DECO SURFACE BOX SINGLE (DBS) **TABLE:** SHOWS BOX SIZE THAT IS REQUIRED

DIRECT	LO	LO	LO	LO	LO	MO	MO	MO	MO	MO	SO	SO	SO	SO	SO	HO	HO	HO	HO	HO
INDIRECT	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO	—	LO	MO	SO	HO
12	4'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	4'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	4'	N/A ^a	N/A ^a	N/A ^a	N/A ^a	4'	N/A ^a	N/A ^a	N/A ^a	N/A ^a
18	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	N/A
24	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	4'	N/A ^c	4'	4'	N/A ^c	N/A ^c	N/A ^c

N/A^a — Indirect Not Available


N/A^b — Exceeds Number of Drivers Allowed for RPAC

N/A^c — Exceeds Amperage Allowed for this Configuration




PACS AND RPACR CROSS SECTIONS

DIRECT CANOPY MOUNT (PAC) Canopy Driver Box — Driver access behind canopy

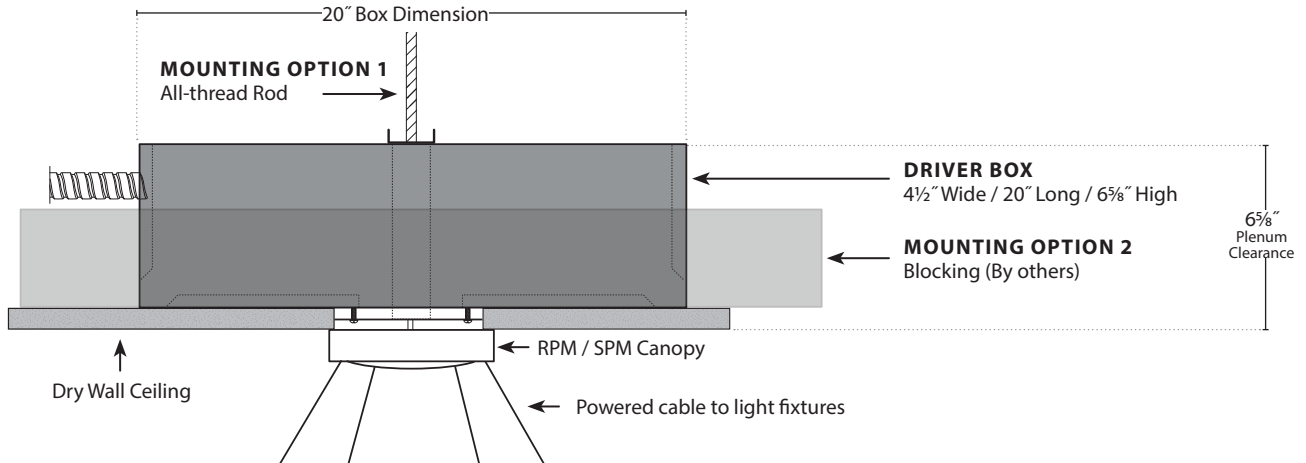


REMOTE (RPAC - X7, X3, X1): Remote Driver Box — Remote access required

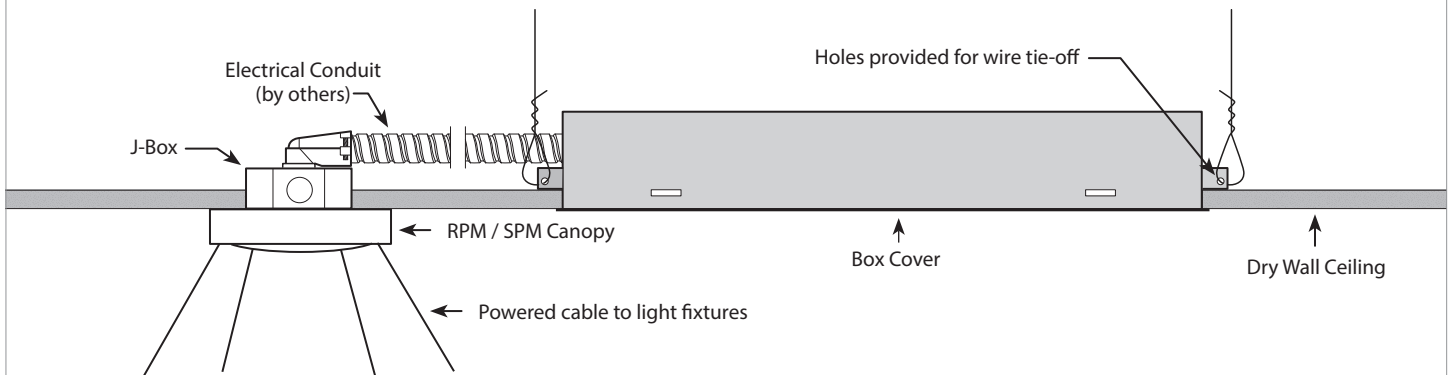


DECO BOX DETAIL (DBS OR DBD)

SURFACE MOUNT J-BOX WITH SIDE FEED:

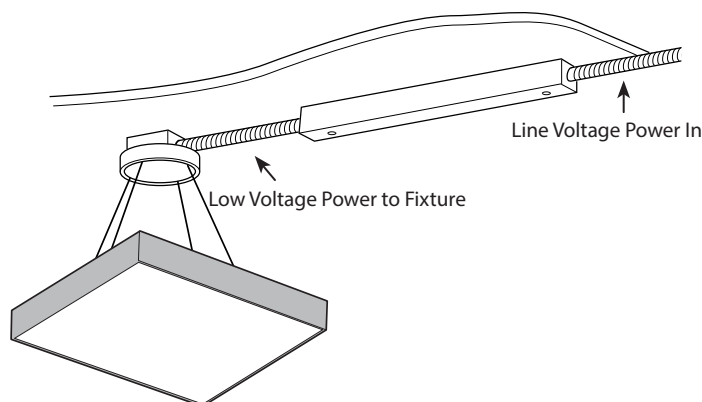

RECESSED J-BOX WITH TOP FEED:

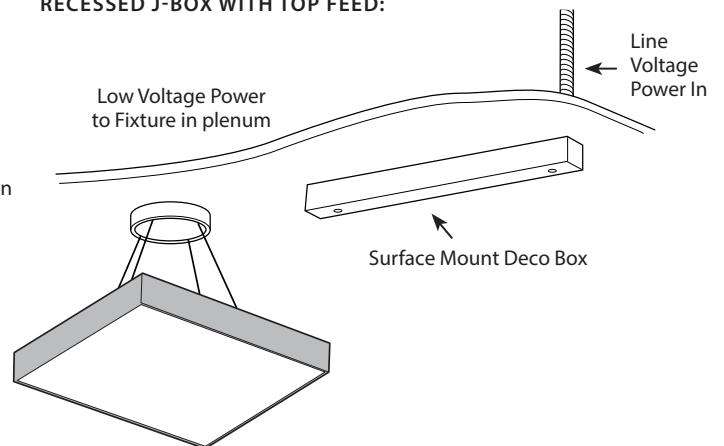

Gaze | Pendant, Surface & Wall Spool, Square



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

LM79 & TM30 DATA:

	MEASURED CCT	MEASURED LUMENS	CRI	R9	DuV	SPD	TM30 — COLOR VECTOR	TM30 — COLOR DISTORTION
LED27	2680	80%	93	58	0.001		89 Rf	97 Rg
LED3	3042	95%	82	6	0.001		81 Rf	92 Rg
LED3-90	3016	85%	93	61	0.000		88 Rf	96 Rg
LED35	3482	100%	82	3	0.002		81 Rf	92 Rg
LED35-90	3417	85%	93	67	0.000		88 Rf	96 Rg
LED4	3952	102%	82	4	0.003		81 Rf	92 Rg
LED4-90	3882	85%	92	67	0.003		87 Rf	96 Rg
LED5-90	4889	85%	94	84	0.002		86 Rf	95 Rg