


PRUDENTIAL LTG.

# WET BIONIC PRO3 LINEAR

Continuous  lines of light  
perfected for the outdoors



[prulite.com](http://prulite.com)

1774 East 21<sup>st</sup> Street, Los Angeles, CA 90058 | 213.746.0360 | [info@prulite.com](mailto:info@prulite.com)

# Why **Wet BionicPro**?

Imagine creating a breathtaking ambiance with a lighting solution that seamlessly integrates into any outdoor setting.

## 01

### Seamless Aesthetic.

WetBionicPro, where form meets function seamlessly. Designed for outdoor environments, it maintains a clean, minimal look with no door frames or interruptions in the lines of light.

## 02

### Rugged Durability.

Built to withstand the elements, Wet BionicPro features a gasketed lens and IP65/66 ratings, offering complete protection against dust ingress and high-pressure water jets. Its IK08 impact protection ensures reliability in rugged environments. Our 'Outdoor Paints' shield against harsh environments and UV sun exposure.

## 03

### Versatility in Every Beam.

Experience best-in-class light distributions including Lambertian, Batwing, Wall Wash, Wall Graze and Perimeter Room Fill, with just a lens change.

## 04

### Flexible Mounting Options.



Choose from a range of mounting options tailored to fit any design need: Continuous Channels for seamless integration, Brackets for a minimalist aesthetic, and upcoming Stem mounts for added versatility.

Our best-selling BionicPro Series has taken on an entirely new challenge – and triumphed, with WetBionicPro.


Elevate your outdoor spaces with a lighting solution that is not only the best in the industry but also a testament to cutting-edge technology and sophisticated design. Embrace the future of outdoor illumination with our Wet BionicPro and let your surroundings shine with brilliance and elegance.




### BUILT TO WITHSTAND THE ELEMENTS




MINIMAL  
END CAP

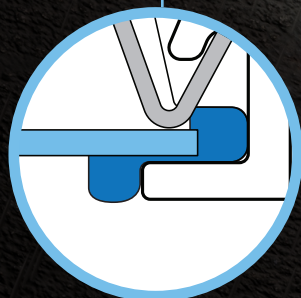

GASKETED  
LENS

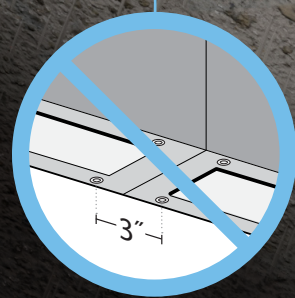

SEAMLESS LENS,  
NO DOORFRAME

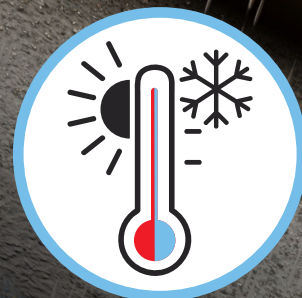

TEMPERATURE  
RANGE -30° TO 50° C





FOCAL GLOW WASH

# Rugged Durability.


**“Engineered for the elements,  
designed for beauty.”**

## Gasketed Lens

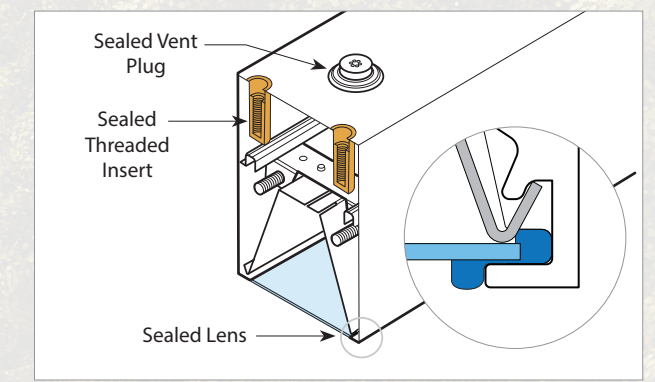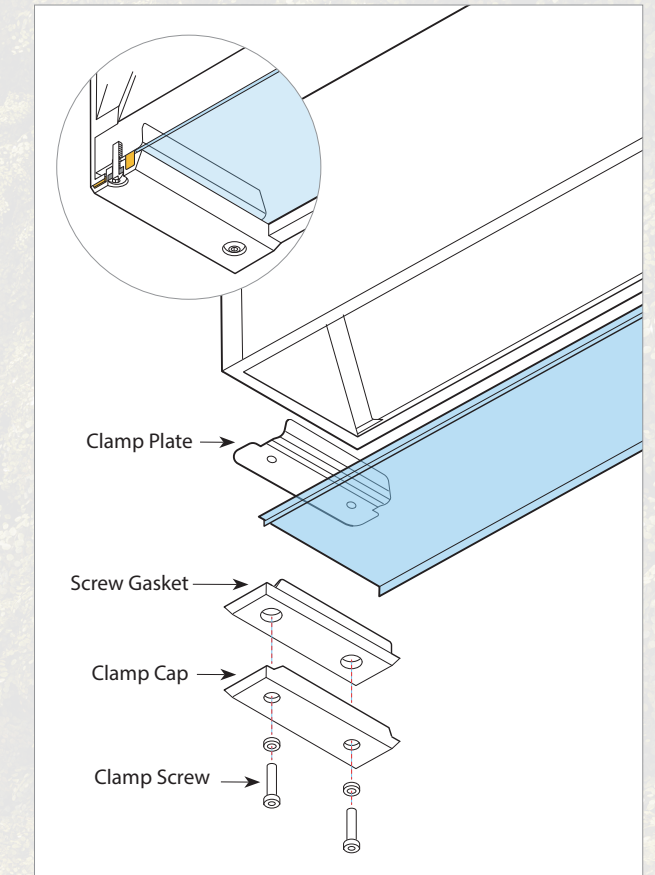

## Advanced Protection

Our 'Outdoor Paints' shield against harsh environments and UV Sun Exposure.

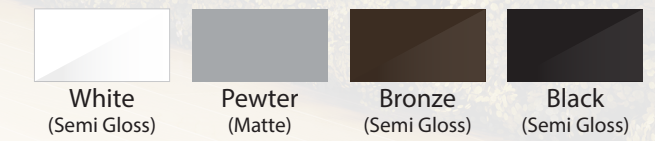

# Versatility in Every Beam.

Experience best-in-class light distributions including Lambertian, Batwing, Wall Wash, Wall Graze and Perimeter Room Fill, with just a lens change. Each distribution delivers precise lighting effects for various outdoor applications.

## DISTRIBUTIONS — JUST A LENS CHANGE



Satin




Batwing



Wall Wash



Wide Wall Graze



Room Fill




**WIDE WALL GRAZE**  
(RECESSED LINEAR COMING SOON)




PERIMETER ROOM FILL


### Focal Glow Wall Wash (WWG)

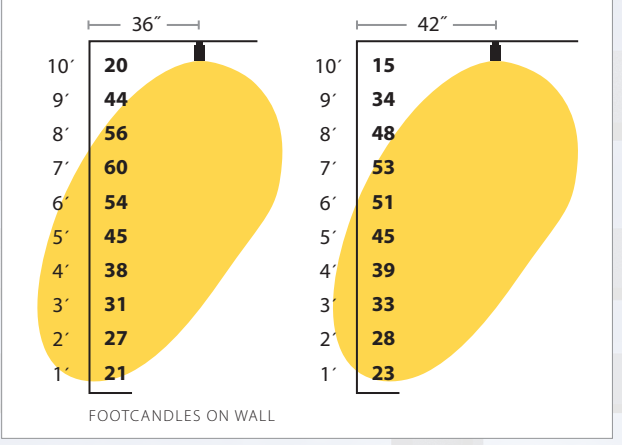


### Wide Wall Graze (WWG)

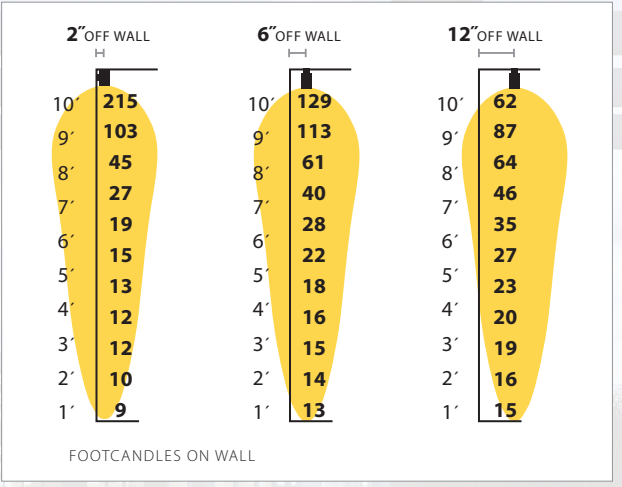

### Satin (SAL) Vs. Batwing (BTW)

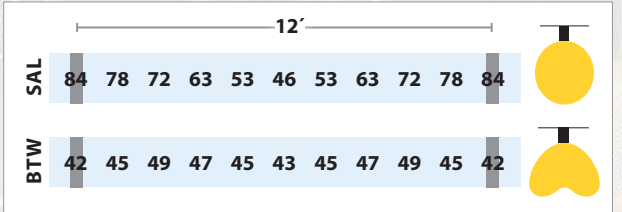


### Perimeter Fill (PFL)

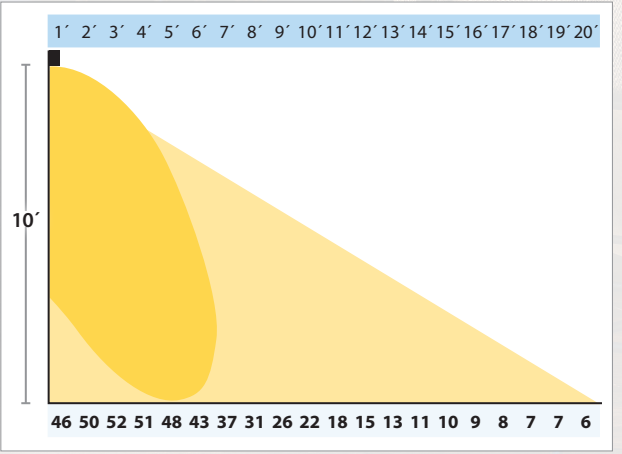

# Flexible Mounting Options.

Choose from a range of mounting options tailored to fit any design need:

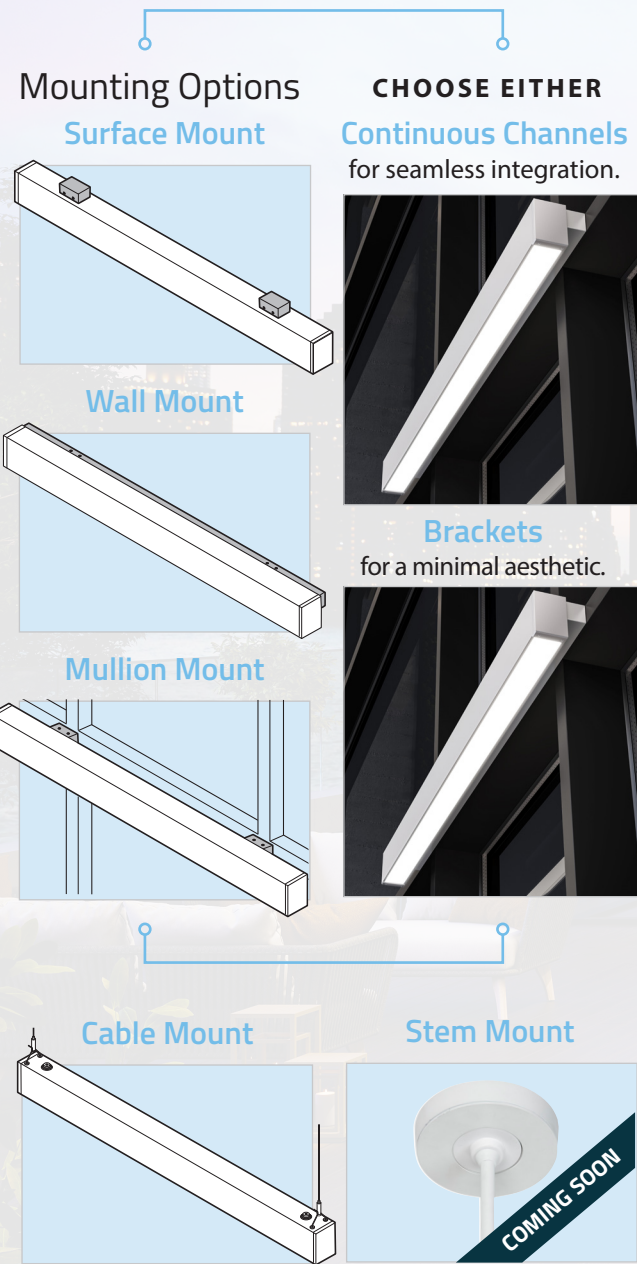

# Visual Continuity.

Achieve a consistent aesthetic from interior to exterior spaces with Prudential Lighting's BionicPro series, now extended outdoors with Wet BionicPro.



# PruHues



2700K

6500K

- Tunable White 2700K-6500K or 2200K-5000K.
- Adjust the color temperate and brightness separately.
- Simulates warm to cool to warm transition of sunlight.



5000K

2200K

- Warm Dim 2200K-5000K max.
- Color temperature warms as the luminaire is dimmed.
- Conveys calm, relaxing hospitality mood.



- Newly discovered blue-sky receptors (450-490nm) in our eyes are believed to drive improved daytime alertness, mood, brain function (increased serotonin).
- BluHue BIOS SkyBlue™ pinpoints peak 490nm sensitivity to provide the most benefit from an electric light source.
- At night, simply dim the lights to remove SkyBlue™ (dynamic) or dim all together (static).



- RGBW Vibrant full gamut of colors and white light on the black body curve.
- Four-channel control, DMX drivers.
- Ability to choose full color, dynamic white or static white for Direct / Indirect versions.
- Quad chip.




## MOUNTING DETAIL & CROSS SECTIONS

### Surface Mount

### Wall Mount

### Mullion Mount



### Cable Mount

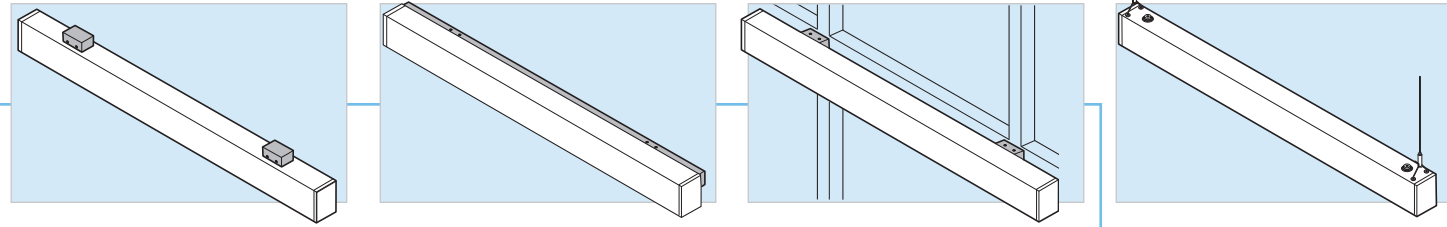



### Channels

### Brackets



#### WMC — WALL





#### WMC2 — WALL





#### WMC — SURFACE





#### WMC2 — SURFACE





#### WMU — WALL





#### WMU1 — WALL





#### WMU2 — WALL





#### WMU — SURFACE




#### WMU1 — SURFACE




#### WMU2 — SURFACE



## ADJOINING DETAIL

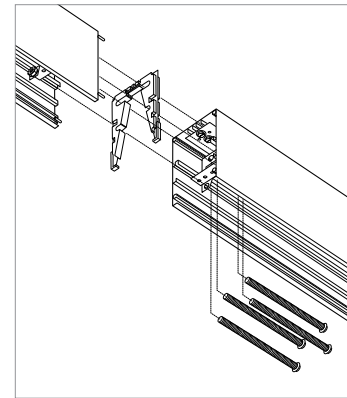

## DMX / CAT5

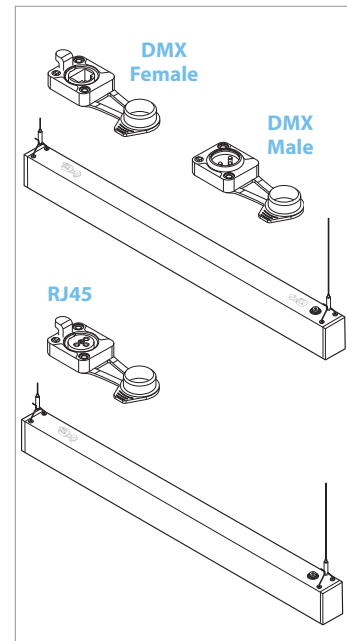

Declare.



Made in the  
US★



## ORDERING MATRIX

SERIES	LENS POS.	LED COLOR	OUTPUT	LENGTH	FINISH COLOR	DISTRIBUTION	CIRCUITING	VOLTAGE	MOUNTING	MOUNTING LOCATION	CEILING SYSTEMS	DRIVERS & CONTROLS	OPTIONS
WETBPRO3-LIN	FLSH						SC				X3		
BionicPro 3" Linear	FLSH Flush Lens	LED27 2700K (90CRI) LED3 3000K LED4 4000K LED3-90 3000K (90CRI) LED35-90 3500K (90CRI) LED4-90 4000K (90CRI) LED5-90 5000K (90CRI) <b>PRUHUES:</b> BLU3S Static BLU3D* Dynamic BLU35S BLU35D* BLU4S BLU4D* *Dynamic BIOS, SkyBlue spike can be dimmed, CCT warms slightly	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	2' 3' 4' 5' 6' 7' 8' R (Row Length, 1" increments) SRL Sym-metric Row Length	WetTMW Wet Textured White Semi-gloss WetYBB Wet Black Semi-gloss WetYPE Wet Pewter Matte WetYBR Wet Bronze Semi-gloss	SAL Satin Lens BTW Batwing PFL Perimeter Room Fill WWG Focal Glow Wall Wash WGZ Wide Wall Graze	SC Single Circuit	UNV (120-277) 347 (Emergency battery requires remote driver box)	(SPECIFY MOUNTING LOCATION IN NEXT COLUMN →) WMC (Channel) .75" Tall Continuous Channel WMC2 (Channel) 2" Tall Continuous Channel WMU (Bracket) 5" Tall Bracket WMU1 (Bracket) 1" Tall Bracket WMU2 (Bracket) 2" Tall Bracket CA96" Aircraft Cable (NOT for outside installs where wind can swing fixtures)	WALL / MULLION SURFACE Ceiling (NA on CA)	X3 Hard Ceiling ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLED (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) nLight-Air includes rIO nLight-Wired Acuity nLight Drivers SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std) SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std) STEP Signify Advance Step Dimming 2WIRE ELV/Forward/Reverse Phase Driver <b>PRUHUES:</b> E10V 2 Channel Color Control EDALI 2 Channel Color Control EDMX ChromaHue or Static White	EMC Emergency Circuiting EF Power End Feed (NA: CA Aircraft Cable) COS Custom On-Center Spacing for Wall/Surface Brackets	



# Reliability.

Ensure consistent performance with protection against dust, water, and impact, making WetBionicPro ideal for outdoor and interior environments.



PHOTO RENDERING

RECESSED LINEAR  
(COMING SOON)



**PRUDENTIAL LTG.**

1774 East 21<sup>st</sup> Street  
Los Angeles, CA 90058

TEL 213.746.0360  
FAX 213.741.8590

URL [prulite.com](http://prulite.com)  
EMAIL [info@prulite.com](mailto:info@prulite.com)

352 7<sup>th</sup> Avenue, Suite 406  
New York, NY 10001

TEL 908.658.4231