

PRUDENTIAL LTG.

CELEBRATING OUR **70**TH ANNIVERSARY



BionicPro2 Mini

LINEAR



Not to Brag, But Our BionicPro2 Mini is Kind of a Big Deal!

Small Profile. Serious Performance.

- Available in 2" (remote) and 3" (integral) profiles.
- Exceptional distributions: Lambertian, Batwing, Focal Glow Wall Wash, Medium & Wide Graze, Perimeter Room Fill.
- Seamless lensing—no light leaks.
- Versatile mounting options: Surface, Wall, Cable, Rigid & Swivel Stem Mount, Continuous Channels & Brackets for Mullion Mounting.
- NEW! Wood, metallic, leather & carbon fiber finishes.

UP TO
115 LPW
1200
LM/FT
SAL+BTW



Wood You Look at This!




Stunning New Architectural Laminates.

Available on All BionicPro Linear Luminaires.



SPECIAL ORDER OPTIONS (EXTENDED LEAD TIME)

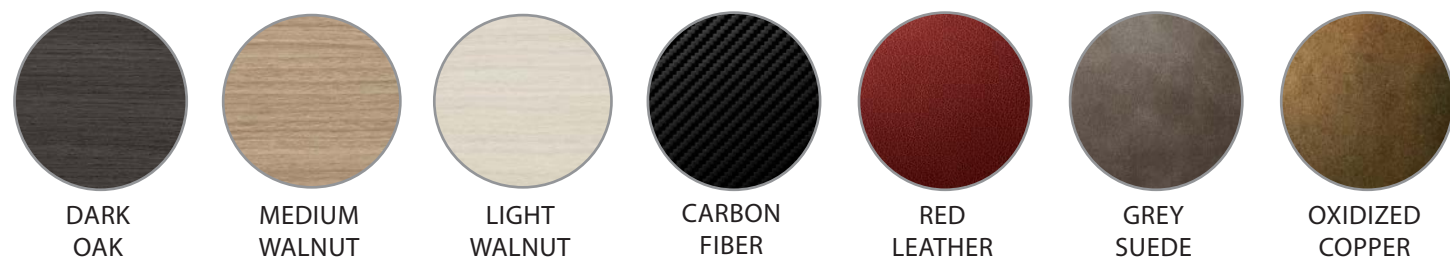

Naturally Inviting

Oak & Walnut in Light, Medium, or Dark Stains.

Industrial Cool

Oxidized Metallic Gold, Black & Copper.

Chic & Cutting-Edge

Carbon Fiber, Red Leather & Grey Suede.


Unmatched Distributions. Upgraded Performance.

Precision optics—now with even higher efficacies.



Hold up—did someone say shimmer?

Say Hello to our New Luxe Metallics!

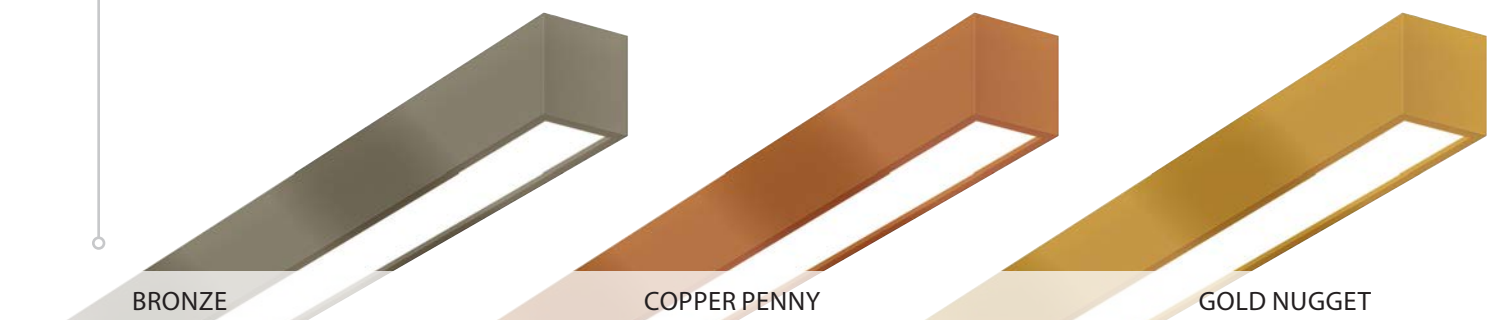

Designed to Stand-out



2700K

6500K

- Tunable White 2700K-6500K or 2200K-5000K.
- Adjust the color temperate and brightness separately.
- Simulates warm to cool to warm transition of sunlight.



5000K

2200K

- Warm Dim 2200K-5000K max.
- Color temperature warms as the luminaire is dimmed.
- Conveys calm, relaxing hospitality mood.



- Newly discovered blue-sky receptors (450-490nm) in our eyes are believed to drive improved daytime alertness, mood, brain function (increased serotonin).
- BluHue BIOS SkyBlue™ pinpoints peak 490nm sensitivity to provide the most benefit from an electric light source.
- At night, simply dim the lights to remove SkyBlue™ (dynamic) or dim all together (static).




- RGBW Vibrant full gamut of colors and white light on the black body curve.
- Four-channel control, DMX drivers.
- Ability to choose full color, dynamic white or static white for Direct / Indirect versions.
- Quad chip.




MOUNTING DETAIL & CROSS SECTIONS


Surface Mount




Wall Mount



Mullion Mount




Cable Mount




Channels

Brackets


WMC — WALL




WMC2 — WALL




WMC — SURFACE




WMC2 — SURFACE

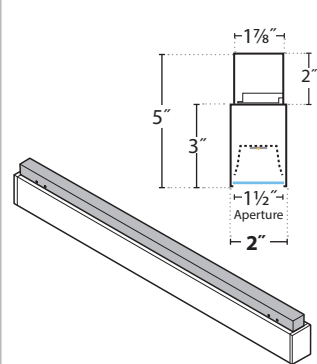


WMU — WALL

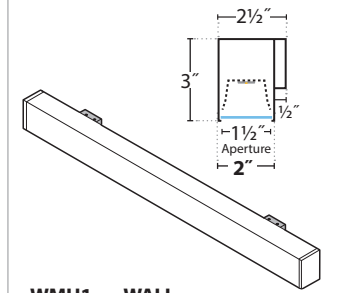


WMU1 — WALL




WMU2 — WALL




WMU — SURFACE

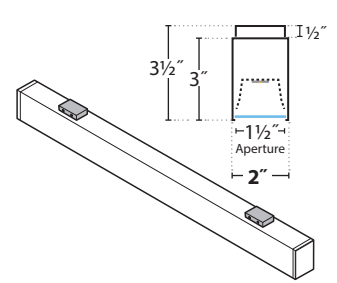


WMU1 — SURFACE




WMU2 — SURFACE

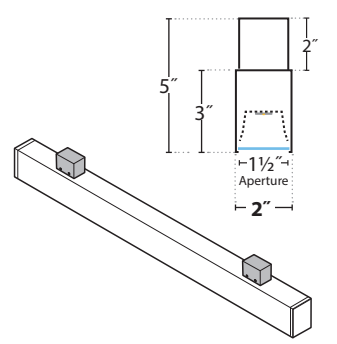

ADJOINING DETAIL

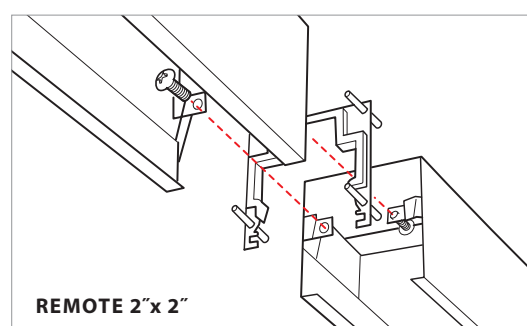

REMOTE 2"x 2"

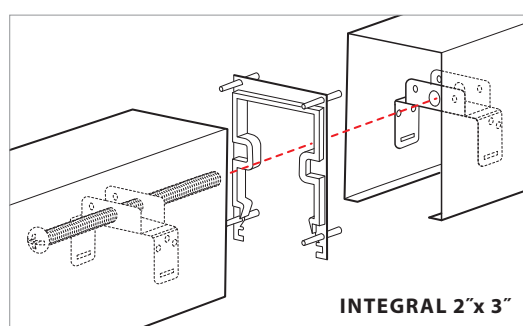


INTEGRAL 2"x 3"

CANOPY DETAIL



RIGID (RSC)

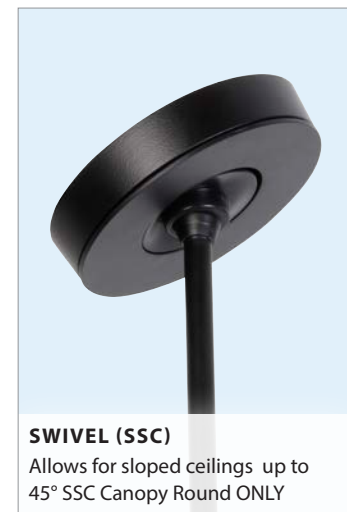

SWIVEL (SSC)
Allows for sloped ceilings up to 45° SSC Canopy Round ONLY












FINISH COLORS & LAMINATES

Finish Colors


STANDARD:



PREMIUM:







LUXE METALLICS:








Choose from one of our Premium Colors with no set-up fee. For paint chip samples, please email: info@prulite.com

Laminate Finishes

STANDARD:



SPECIAL ORDER (EXTENDED LEAD TIMES):



SERIES	TYPE	LED COLOR	OUTPUT	LENGTH	COLOR / LAMINATE	LAMINATE CANOPY COLOR	DISTRIBUTION	CIRCUITING	VOLTAGE	MOUNTING	CEILING TYPE	DRIVERS	OPTIONS & SENSORS
BPRO2-MINI	REM Bionic-Proz Mini Linear	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 3000K (90CRI) LED35-90 3500K (90CRI) LED4-90 4000K (90CRI) LED5-90 5000K (90CRI)	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm/ft or w/ft)	2' 3' 4' 5' 6' 7' 8' R (Row Length, 1' increments, Consult factory for custom lengths)	TMW Textured Matte White (Standard) YGW Gloss White Y_ Premium Color CC_ Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget	(SKIP THIS COLUMN IF LAMINATE FINISH IS NOT SELECTED) TMW Textured Matte White (Standard) YGW Gloss White Y_ Premium Color CC_ Custom Color LUXE METALLICS: YBZ Bronze YCP Copper Penny YGN Gold Nugget	SAL Satin Lens BTW Batwing WWG Focal Glow Wall Wash PFL Perimeter Room Fill MGZ Medium Wall Graze WGZ Wide Wall Graze	SC Single Circuit	UNV (120-277) 347 (Emergency battery requires remote driver box)	(SPECIFY CEILING TYPE IN NEXT COLUMN =>) CA48", 96" or 144" Aircraft Cable (Adjustable) SURF Surface Mount (Direct only) RSC Rigid Stem Center SSC Swivel Stem Center (-30° of rotation standard, -45° on request)	CEILING TYPE: X1 T-Bar X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM01 0-10v, 1% Dimming (Standard) LDE1 Hi-lume 1% EcoSystem LED (Soft fade on, fade-to-black dimming) ECO 1% 0-10v, EldoLE (Logarithmic dimming std) ECDA 1% DALI, EldoLED (Logarithmic dimming std) nLight-Air Acuity nLight nIO Drivers (ECDA driver ONLY) SOLO 0.1% 0-10v, EldoLED (Dim-to-dark, Logarithmic dimming std)	EMHE CAT20 Emergency Battery (1250 Delivered lumens; CA Title 20 compliant, 4' or <Remote) ETS-DR Iota ETS-DR Emergency Transfer Switch EMC Emergency Circulating PruTune Wall Device (EDALI only, one PruTune device for each zone)
		PRUHUES: bioS STATIC: BLU3S BLU35 BLU4S DYNAMIC: BLU3D* BLU35D* BLU4D* *Dynamic BIOS, SkyBlue spike can be dimmed, CCT warms slightly			NOTE: All canopies painted White (TMW) unless specified otherwise.	NOTE: All canopies painted White (TMW) unless specified otherwise.				(SPECIFY MOUNTING LOCATION IN NEXT COLUMN =>) WMC (Channel) .75" Tall Continuous Channel WMC2 (Channel) 2" Tall Continuous Channel WMU (Bracket) .5" Tall Bracket WMU1 (Bracket) 1" Tall Bracket WMU2 (Bracket) 2" Tall Bracket	MOUNTING LOCATION: WALL (For Wall or Mullion Mount) SUR Ceiling	SODA 0.1% DALI, EldoLED (Dim-to-dark, Logarithmic dimming std) STEP Signify Advance Step Dimming 2WIRE ELV/Forward/Reverse Phase Driver PRUHUES: E10V 2 Channel Color Control EDALI 2 Channel Color Control EDMX ChromaHue or Static White	205 WattStopper PIR Occupancy 205-ON/OFF 205-STEP: Dim to 50% 205-DM: Dim to 1% ATHENA Lutron RF (Dim-to-Off Standard) LVOC** Lutron Vive (Occ & RF) LVRF** Lutron Vive (RF Only) ** Requires Lutron driver NXSMP Hubbell (Occ) rE57 Daylight+(PIR Acoustic) (Occ) (nLight-Air) Part Number: rE57-PDT-180D-G2



— DESIGNED FOR SUSTAINABILITY & COMPLIANCE —

BABAA
BUILD
BUY **AMERICA**
ACT

Declare.

prulite.com



1774 East 21st Street, Los Angeles, CA 90058 | 213.746.0360 | info@prulite.com
NY City Showroom (By Appointment Only) 352 7th Ave. Suite 406, New York, NY 10001 | 908.658.4231