Round (RPM)/Square (SPM) Canopies





P3640, P3950 & Quad-44


(These fixtures are **OVER** 63 lbs, **UNDER** 110 lbs)

INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

PART	PART NO.	DESCRIPTION
CANOPY BODIES:		
	**100-00071-03**	Round
	**100-00072-03**	Square
CANOPY COVERS:		
	**105760**	Single Feed
	**105892**	Dual Feed
	**105597**	Support Ring
	**100-00334-14**	#6-32 x ⅜″ Phillips Pan Head. Type F. Self- Tap Screw (x8)
	**100-00183-10**	Insulation Ring
	**100-00144-09**	Romex Clamp — NPT ½″
	**105717**	Romex Clamp Bracket — NPT ½″
	**100-00047-14**	#8-32 x ⅜″ HWH SL Self- Tap Screw (x2)
	**100-00145-09**	Romex Clamp — NPT ¾″ (Dual Feed)
	**106029**	Romex Clamp Bracket — NPT ¾″ (Dual Feed)
	**100-00047-14**	#8-32 x ⅜″ HWH SL Self- Tap Screw (x2)
DUAL FEED BUSHINGS:		
	**100-00338-14**	Black
	**100-00339-14**	White

PART	PART NO.		DESCRIPTION
POWER CORDS:			
	100-00023-09	3-Wire	SJT Power Cord
	100-00024-09	4-Wire	
	100-00912-09	5-Wire	
	100-01002-09	6-Wire	
CABLE KITS:			
	**100-00142-08**	60″	⅝₄″ Galvanized Cable & ¼″ Ball ¼″ Nut & Gripper
	100-00143-08	108″	
	100-00144-08	156″	
	**100-00449-09**		Grounding Wire 7″
	**100-00187-14**		#8-32 x ⅜″ HHWSL **GREEN** Ground Screw
	**100-00119-14**		Washer #10 Cup Term-Brass

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional.

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Round (RPM)/Square (SPM) Canopies


P3640, P3950 & Quad-44

(These fixtures are **OVER** 63 lbs, **UNDER** 110 lbs)

INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

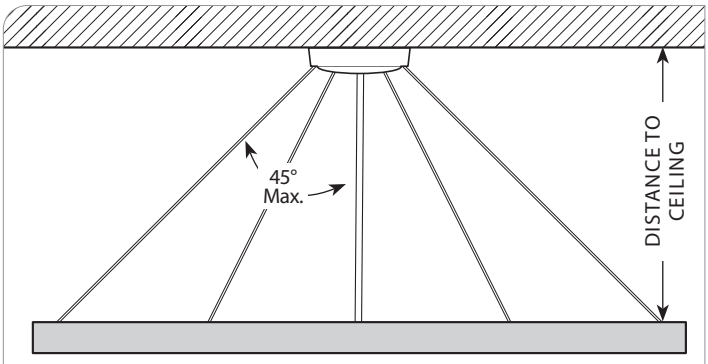


Contractor to field cut and strip power cord to specified lengths.


MOUNTING LOCATIONS


ROUND:

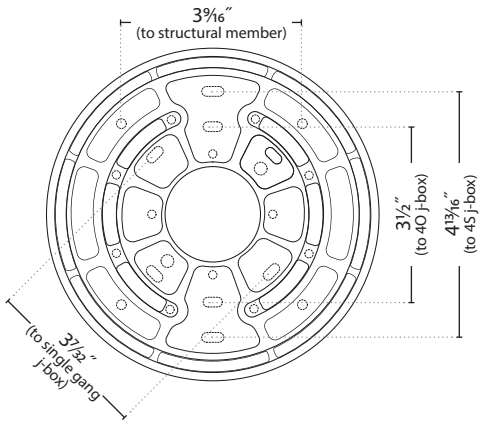



SQUARE:

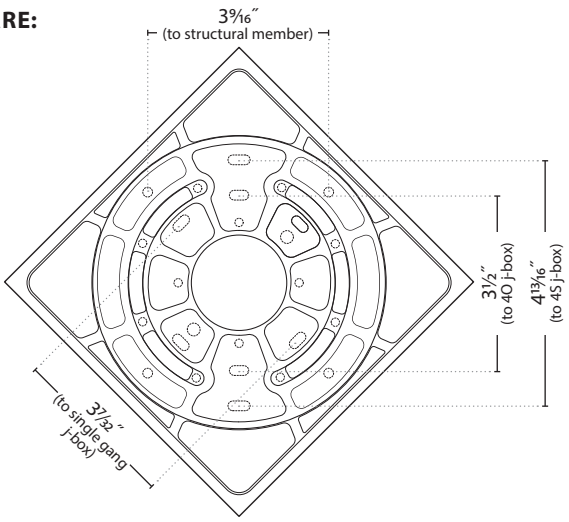









WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional.

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Round (RPM)/Square (SPM) Canopies

P3640, P3950 & Quad-44


(These fixtures are **OVER** 63 lbs, **UNDER** 110 lbs)

INSTALLATION INSTRUCTIONS


PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

1)

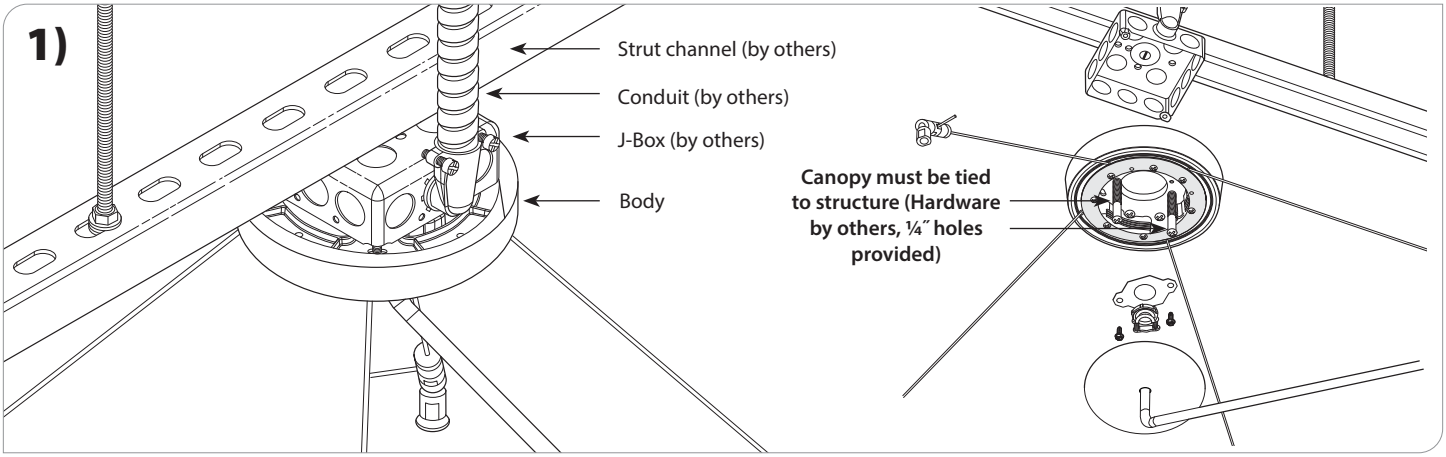

2) Pass cables through Insulation Ring. Follow location chart (below).

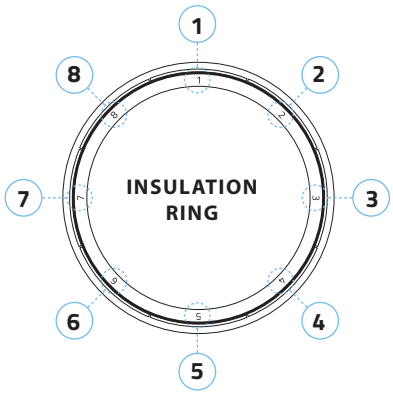

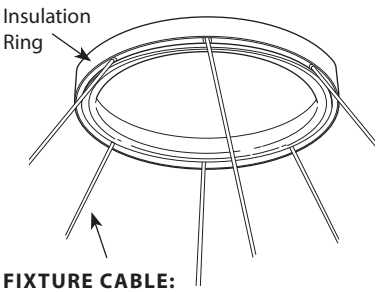


FIXTURE CABLE:
Variable quantity, see table


Cable Quantities & Locations

CABLE QTY	CHAMBERS
3	1, 4, 6
4	1, 3, 5, 7
5	1, 3, 4, 6, 7
6	1, 2, 4, 5, 6, 8


3) Fix Insulation Ring. Make sure cables will keep the fixture in the desired orientation / alignment.

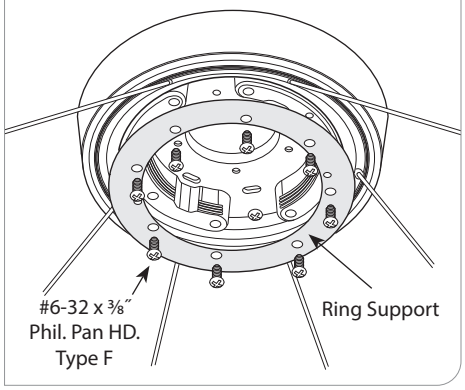


4) Make all power connections. Fix power cord to canopy with the Romex Clamp

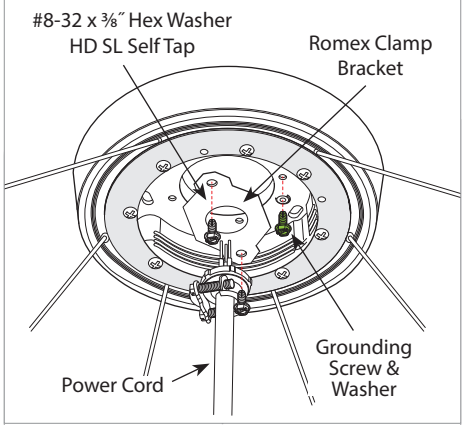


SINGLE FEED:



DUAL FEED:



5) Install cover. Turn cover clockwise, do not overtighten

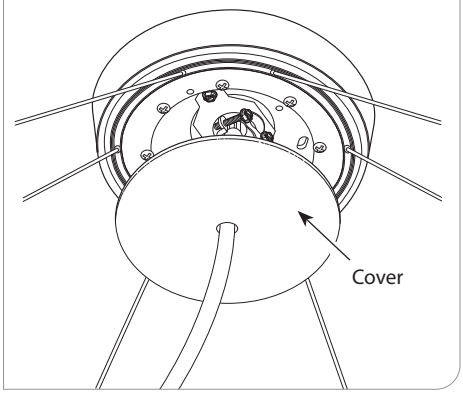

6) Hang and connect fixture per fixture instructions.

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional.

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

Round (RPM)/Square (SPM) Canopies

P3640, P3950 & Quad-44


(These fixtures are **OVER** 63 lbs, **UNDER** 110 lbs)


INSTALLATION INSTRUCTIONS

PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

CABLE ASSEMBLY

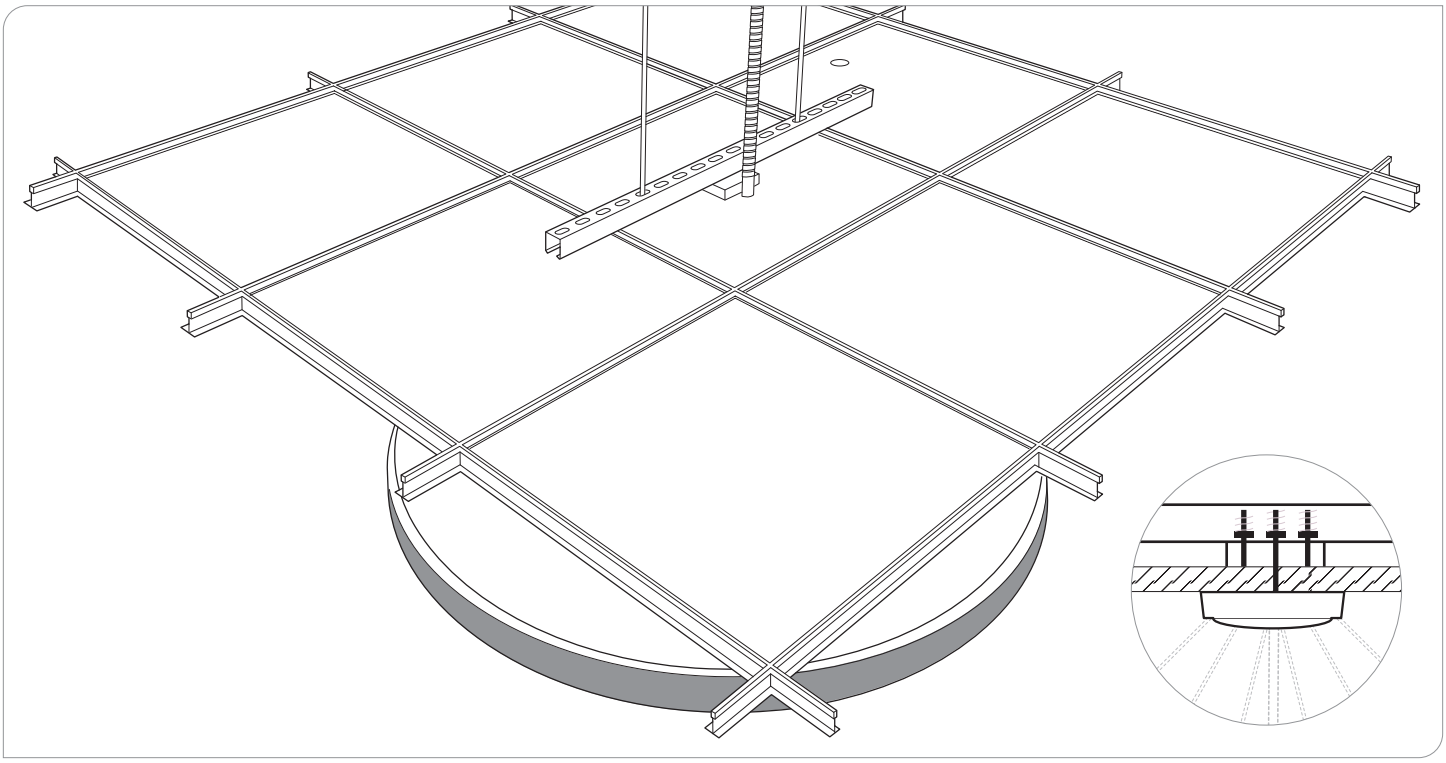

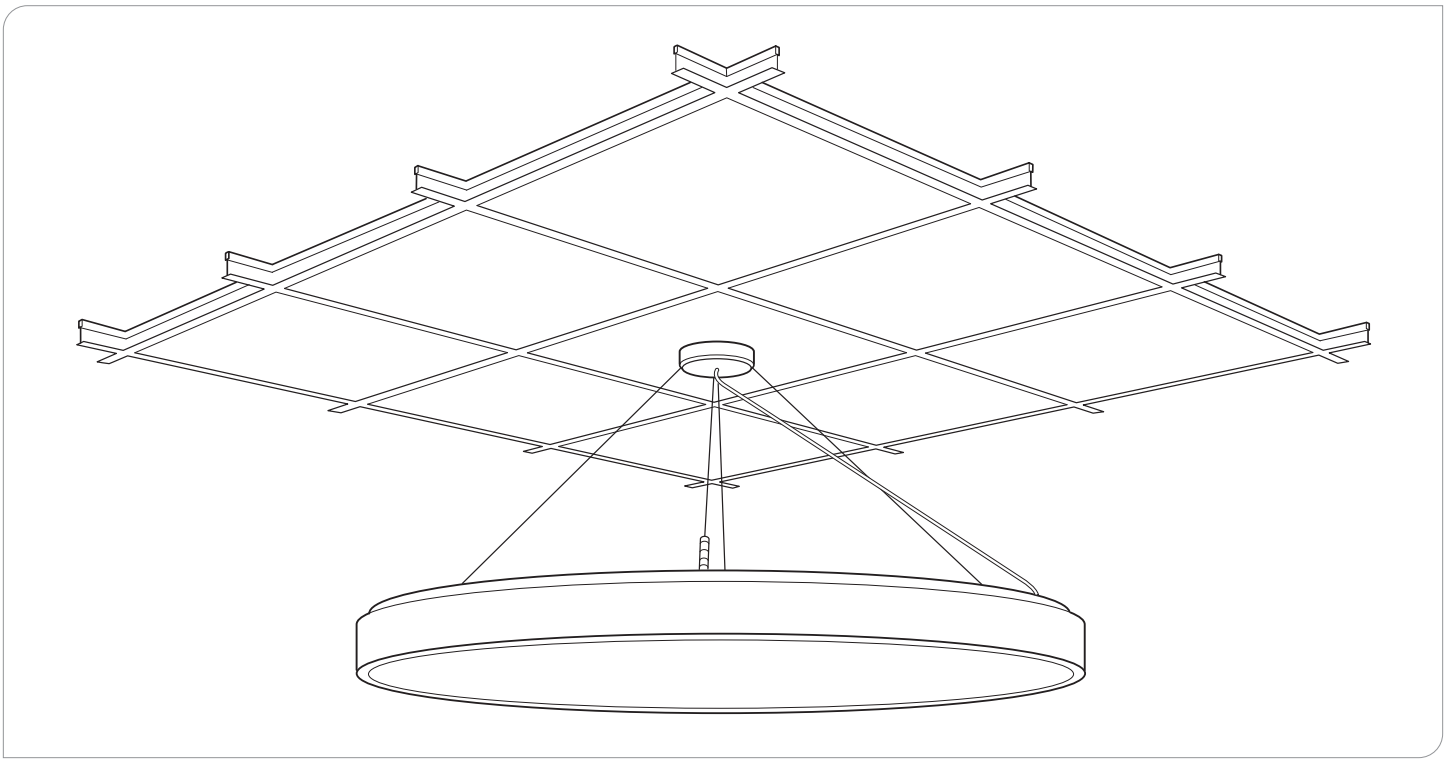

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury
Fixture Installations should ONLY be done by a qualified licensed electrical professional.

USA

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2026 All rights reserved—All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058