



# Gaze | Round & Square Maintenance


## INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

### 1) Remove top plate.

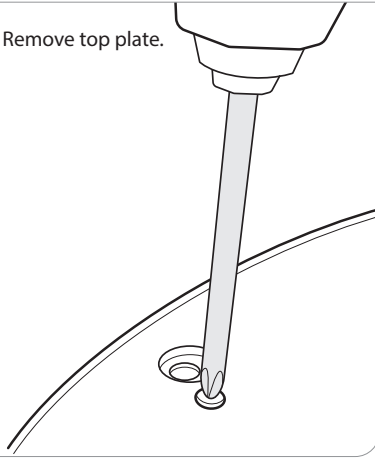


### 2) Disconnect wires.

📷 Photograph wiring to note color connections.

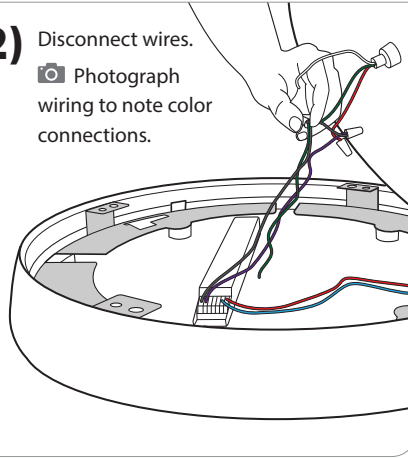

### 3) Replace driver if required (skip to step 4 if not required).




#### WIRING:


0-10V (+) : PURPLE	0-10V (-) : GREY
DALI (+) : PURPLE	DALI (-) : GREY
EcoSystem DALI (+) : PURPLE	EcoSystem DALI (-) : GREY
HOT : BLACK	
NEUTRAL : WHITE	
GROUND : GREEN	
CONSTANT HOT (EM) / DIMMING : RED	
EXTRA HOT / DIMMING : BLUE	
EXTRA HOT / DIMMING : ORANGE	

#### LED REPLACEMENT:


### 4) Remove #8-32 hex nuts.

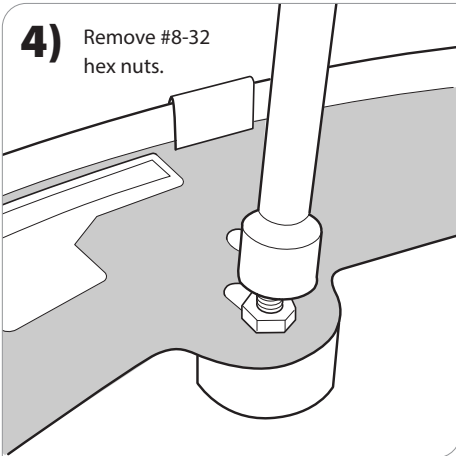

### 5) Remove (4x) rigidity plates. Slide inward and up.

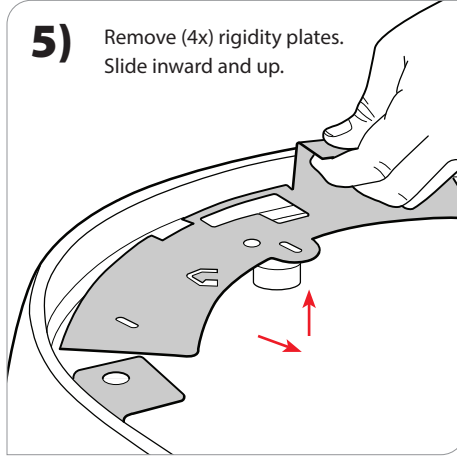


### 6) Remove (3x) rigidity brackets.

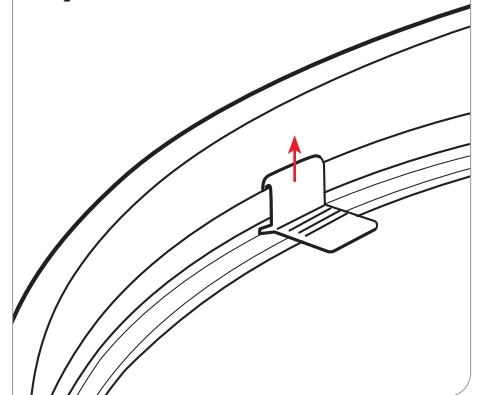


### 7) Remove any debris that may have accumulated in the fixture.


### 8) Disconnect + and - wires (RED and BLUE).

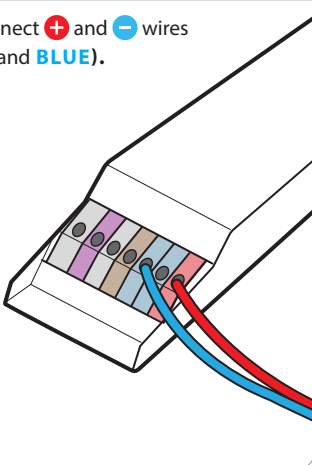

### 9) Lift shield plate and remove.

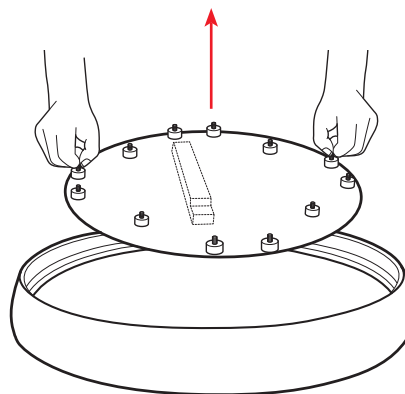

### 10a)

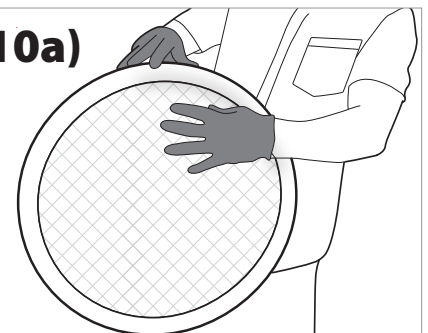

#### GLOVES REQUIRED

Press diffuser from bottom and gently remove all three layers. (Detail on step 11).

**NOTE:** Any scratch, scuff or dirt on any of these items will show up as a dark spot. Store in safe clean environment when not installed in fixture housing.

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit [prulite.com](http://prulite.com) for most current data.  
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



# Gaze | Round & Square

## Maintenance


### INSTALLATION INSTRUCTIONS




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


- 10b)** Light guide assembly consist of reflector, light guide, and diffuser (in that order).

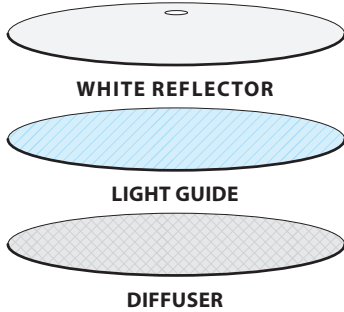

- 11)** Remove LED ring. Gently flex, **DO NOT** twist/bend.

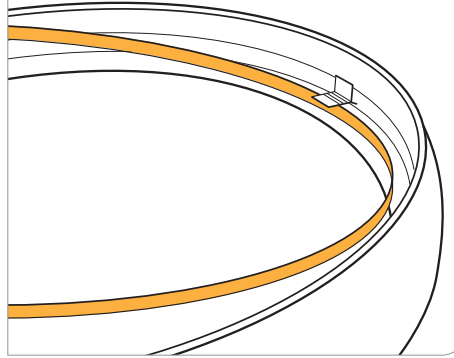


- 12a)** Install new LED ring.

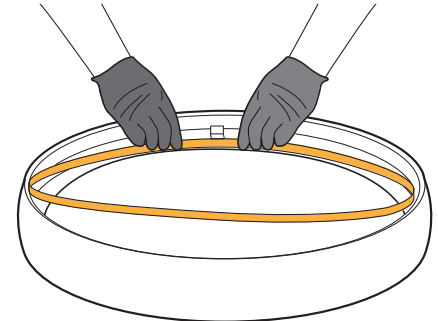


- 12b)** Flex LED ring in middle when half way installed to insert last half.




- 13a)** Install diffuser, light guide, and reflector (in that order) one at a time.

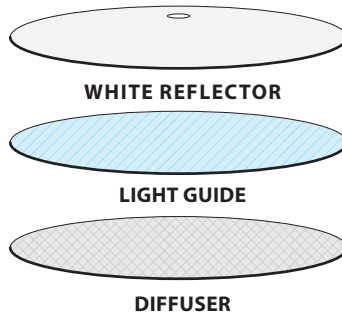


- 13b)** After diffuser and light guide are installed, black arrows on LED tape should be visible to ensure light guide is fully seated in the fixture.

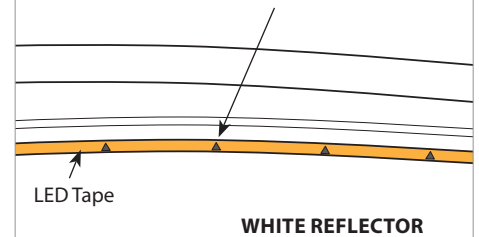


- 14)** Align clearance notches in white reflector with one set of connectors on LED tape. Connect **+** and **-** wires (**RED** and **BLUE**).

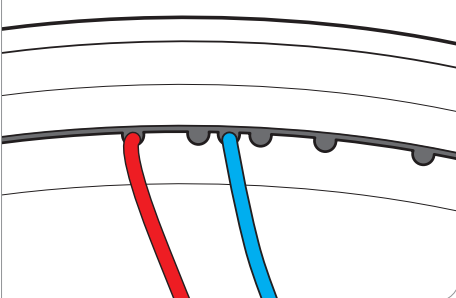

- 15)** Gently install shield plate back in place.

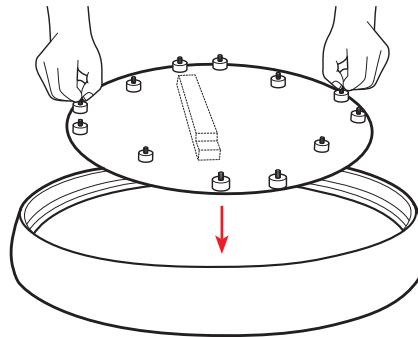

- 16)** Install rigidity plates. First to welded bracket. Place removable rigidity brackets in place and install remaining rigidity plates.

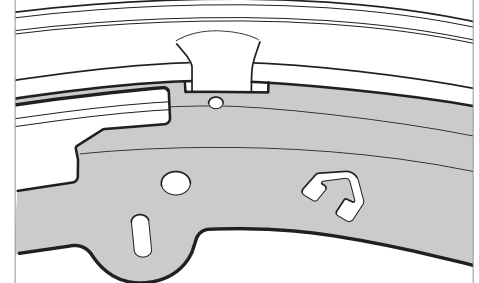

**MAKE SURE WIRES ARE TUCKED UNDER RIGIDITY PLATE AND ARE NOT PINCHED.**

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit [prulite.com](http://prulite.com) for most current data.  
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



# Gaze | Round & Square Maintenance

## INSTALLATION INSTRUCTIONS




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

**17)**

Reconnect wires  
to driver and install  
top plate.

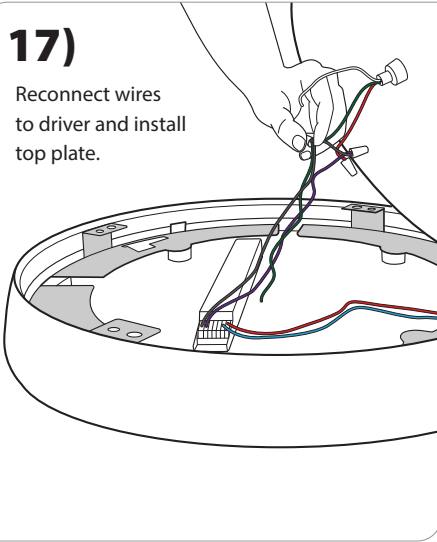

### WIRING:

0-10V (+) : PURPLE	0-10V (-) : GREY
DALI (+) : PURPLE	DALI (-) : GREY
EcoSystem DALI (+) : PURPLE	EcoSystem DALI (-) : GREY
HOT : BLACK	
NEUTRAL : WHITE	
GROUND : GREEN	
CONSTANT HOT (EM) / DIMMING : RED	
EXTRA HOT / DIMMING : BLUE	
EXTRA HOT / DIMMING : ORANGE	

**WARNING:** Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit [prulite.com](http://prulite.com) for most current data.  
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058